



# DP3T & SPDT TERMINATED



## Section 3 Table of Contents

**RAMSES SERIES**

DP3T and Terminated SPDT up to 50 GHz: R585 Series ..... 3-2 to 3-7

**ELECTRICAL SCHEMATICS**

Coaxial DP3T and Terminated SPDT: R585 Series ..... 3-8 to 3-13

**PLATINUM SERIES**

High performance DP3T and Terminated SPDT up to 40 GHz: R595 Series ..... 3-14 to 3-23

**OPTIONAL FEATURES**

Optional Features for DP3T Switches ..... 3-24

**DP3T PART NUMBER SELECTION GUIDE<sup>[1]</sup>**

PLATINUM	RAMSES	DIGITAL POSITION	
		Series	Configuration
DP3T	DP3T	-	-
R595	R585	-	-
-	3	SMA 3 GHz	
3	-	SMA 6 GHz	
-	4	SMA 18 GHz	
4	-	SMA 20 GHz	
F	F	SMA 26.5 GHz	
8	8	SMA 2.9 40 GHz	
-	J	2.4 mm 50 GHz	
-	1	Failsafe	
3	3	Latching	
-	7	Normally open	
-	2	12 V	
7	-	15 V	
3	-	24 V	
-	3	28 V	
5	0/1	DP3T	
2	2/3/4/5	SPDT Terminated	
3	6/7	Terminated 4 ports Bypass	
0	0	Without option	
1	1	Positive common	
-	3	Suppression diodes	
-	4	Positive common and suppression diodes	
0	0	Solder pins	
5	-	D-Sub connector	
-	-	Certificate of conformity	
C	-	Calibration certificate	
R	-	Calibration certificate + RF curves	

**Notes**


TTL driver is already included for the 1, 3, 5 and 7 switch models of the RAMSES R585 series.

Example of P/N: R585832000 is a DP3T SMA2.9 40 GHz, latching, 12 Vdc, without option, solder pins.

1. For part number creation and available options, see detailed part number selection for each series.

## DP3T & TERMINATED SPDT UP TO 50 GHz

### SMA - SMA 2.9 - 2.4 MM

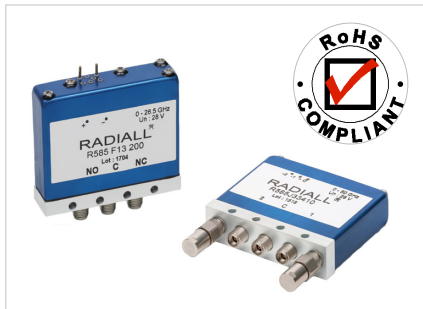

Radiall's RAMSES DP3T and Terminated SPDT switches offer excellent reliability, high performance and operating frequencies from DC to 50 GHz. A full range of options are available within the RAMSES range in order to offer customers a complete solution.

These relays are dedicated to market applications including: defense, instrumentation and telecommunication.

*Example of P/N: R585423300 is a SPDT terminated SMA 18 GHz, failsafe, 28 Vdc, indicator contacts, internal terminations without TTL drivers and solder pins.*

### PART NUMBER SELECTION

## R585

#### SERIES PREFIX

#### RF CONNECTORS

- 3:** SMA up to 3 GHz
- 4:** SMA up to 18 GHz
- F:** SMA up to 26.5 GHz
- 8:** SMA 2.9 up to 40 GHz <sup>[5]</sup>
- J:** 2.4 mm up to 50 GHz <sup>[4]</sup>

#### TYPE

- 1:** Failsafe
- 2:** Failsafe + I.C.
- 3:** Latching
- 4:** Latching + I.C.
- 5:** Latching + S.C.O. <sup>[1]</sup>
- 6:** Latching + S.C.O. + I.C. <sup>[1]</sup>
- 7:** Normally open
- 8:** Normally open + I.C.

#### ACTUATOR VOLTAGE

- 2:** 12 Vdc
- 3:** 28 Vdc

#### ACTUATOR TERMINALS

- 0:** Solder pins

#### OPTIONS

- 0:** Without option
- 1:** Positive common <sup>[2 & 3]</sup>
- 3:** With suppression diodes <sup>[1]</sup>
- 4:** With suppression diodes and positive common <sup>[1, 2 & 3]</sup>

#### SWITCH MODEL

- 0:** Non-terminated 5 port DP3T switch without TTL driver
- 1:** Non-terminated 5 port DP3T switch with TTL driver <sup>[1 & 2]</sup>
- 2:** Terminated SPDT switch without TTL driver / internal termination
- 3:** Terminated SPDT switch with TTL driver / internal termination <sup>[1 & 2]</sup>
- 4:** Terminated SPDT switch without TTL driver / external termination
- 5:** Terminated SPDT switch with TTL driver / external termination <sup>[1 & 2]</sup>
- 6:** Terminated 4 port bypass switch without TTL driver / external termination
- 7:** Terminated 4 port bypass switch with TTL driver / external termination <sup>[1 & 2]</sup>

### Notes

I.C.: Indicator contact/S.C.O.: Self Cut-Off

1. Suppression diodes are already included in Self Cut-Off and TTL option
2. Polarity is not relevant to application for switches with TTL driver
3. Positive common shall be specified only with type 3, 4, 5, 6, 7 and 8 because

*failsafe switches can be used with both polarities*

4. Not available with switch model "2" and "3"
5. Connector SMA 2.9 is equivalent to "K connector®", registered trademark of Anritsu.



## RAMSES Series

## GENERAL SPECIFICATIONS

OPERATING MODE		FAILSAFE		LATCHING		NORMALLY OPEN	
Nominal operating voltage (across operating temperature)	Vdc	12	28	12	28	12	28
		(10.2 to13)	(24 to 30)	(10.2 to13)	(24 to 32)	(10.2 to13)	(24 to 32)
Coil resistance (+/-10%)	Ω	24	138	29	175	47.5	275
Nominal operating current at 23 °C	mA	500	205	420	160	250	102
Average power		See Power Rating Chart page 1-13					
		Internal terminations: 1 Watt CW into 50 Ohms					
TTL input	High level	2.2 to 5.5 Volts			800 μA max 5.5 Volts		
	Low level	0 to 0.8 Volts			20 μA max 5.5 Volts		
Indicator rating		1 W / 30 V / 100 mA					
Switching time (max)	ms	10					
Life (min)	SMA – SMA 2.9	2 million cycles for Normally open and internal terminated models 10 million cycles for all other products					
	2.4 mm	2 million cycles					
Actuator terminals		Solder pins					
Operating temperature range	SMA - SMA 2.9	-40 °C to +85 °C					
	2.4 mm	-25 °C to +70 °C					
Storage temperature range	SMA -SMA 2.9	-55 °C to +85 °C					
	2.4 mm	-40 °C to +85 °C					
Vibration (MIL STD 202, Method 204D, cond.D)		10-2,000 Hz, 20 g			Operating		
Shock (MIL STD 202, Method 213B, cond.C)		100 g / 6 ms, ½ sine			Operating		

## RF PERFORMANCE

CONNECTORS	FREQUENCY RANGE GHz		V.S.W.R. (MAX)	INSERTION LOSS (MAX) dB	ISOLATION (MIN) dB	IMPEDANCE $\Omega$
SMA	DC - 3 DC - 18 DC - 26.5	DC - 3	1.20	0.20	80	50
		3 - 8	1.30	0.30	70	
		8 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
SMA 2.9	DC - 40	DC - 6	1.30	0.30	70	50
		6 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
		26.5 - 40	1.90	0.80	50	
2.4 mm	DC - 50	DC - 6	1.30	0.30	70	50
		6 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
		26.5 - 40	1.90	0.80	50	
		40 - 50	1.90	1.1	50	

## Notes


See page 3-4 for typical RF performance.

RAMSES Series


## R585 TYPICAL RF PERFORMANCE

Example: DP3T SMA up to 26.5 GHz

## INSERTION LOSS &amp; ISOLATION

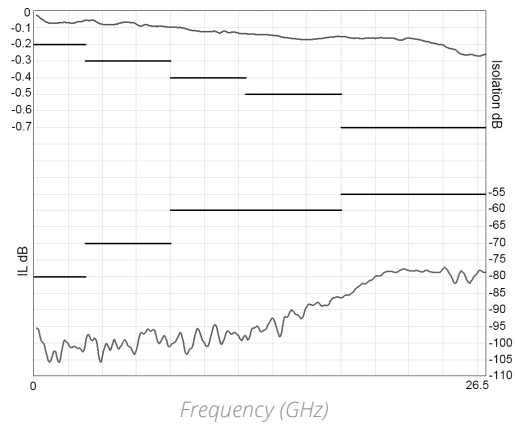


## V.S.W.R.

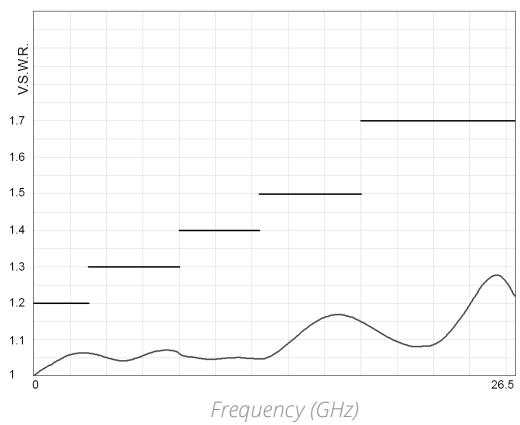


Example: DP3T SMA 2.9 up to 40 GHz

## INSERTION LOSS &amp; ISOLATION

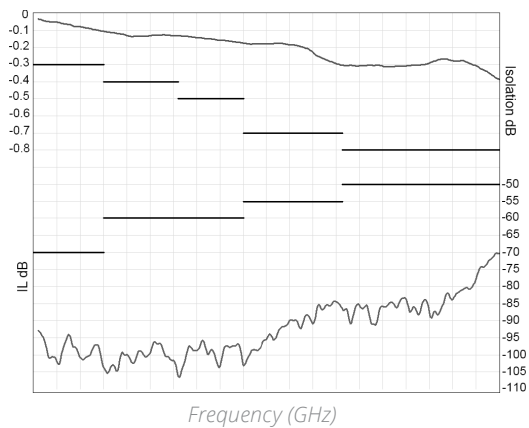


## V.S.W.R.

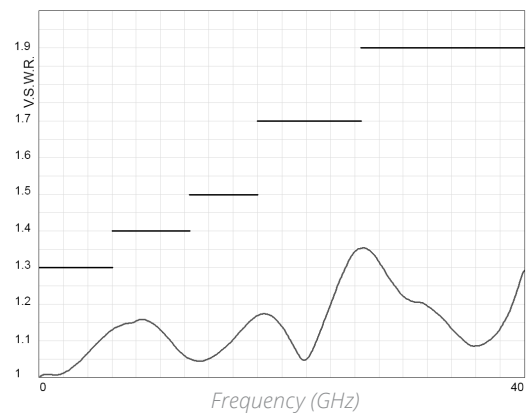


Example: DP3T 2.4 mm up to 50 GHz

## INSERTION LOSS &amp; ISOLATION

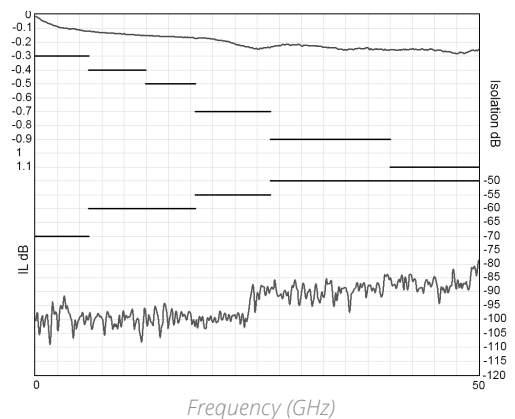


## V.S.W.R.

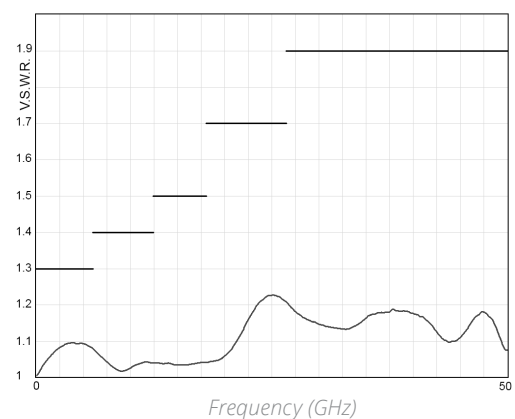

RAMSES Series

TYPICAL OUTLINE DRAWING

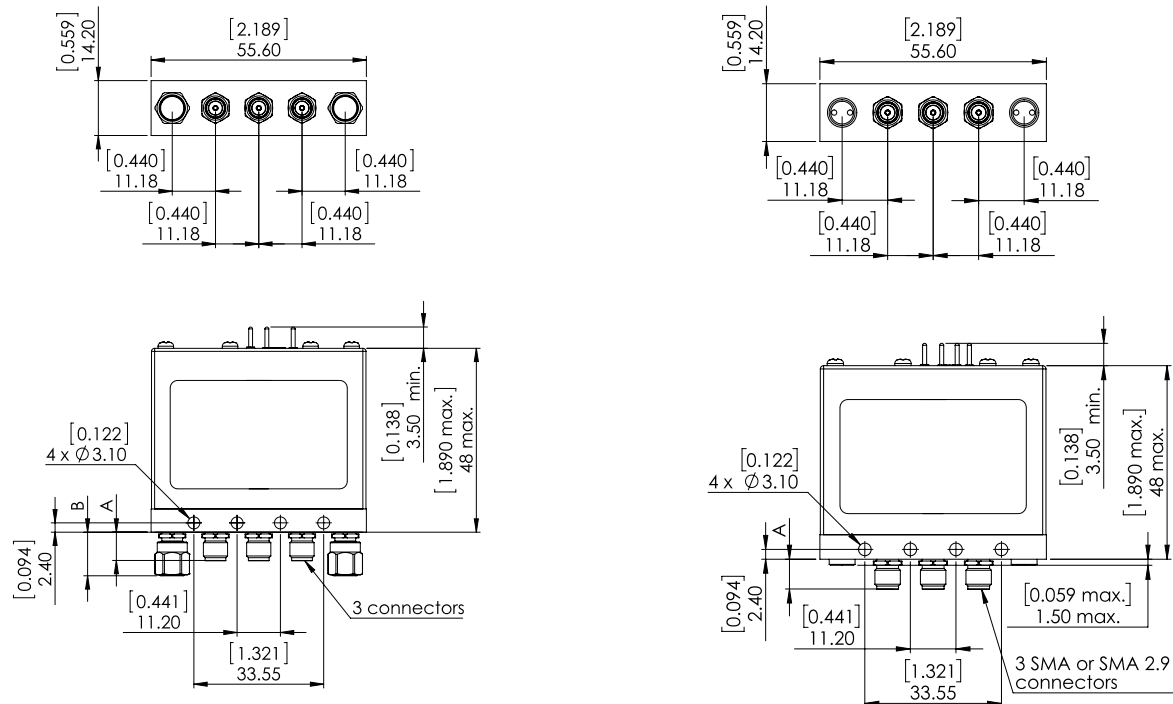



TERMINATED SPDT SWITCH / EXTERNAL TERMINATIONS  
R585 --- 4--  
R585 --- 5--

TERMINATED SPDT SWITCH / INTERNAL TERMINATIONS  
R585 --- 2--  
R585 --- 3--



CONNECTORS	A MAX (MM [INCHES])	B MAX (MM [INCHES]) IF APPLICABLE
SMA up to 18 GHz	7.7 [0.303]	13.5 [0.118]
SMA up to 26.5 GHz	7.7 [0.303]	21 [0.827]
SMA 2.9 up to 40 GHz	6.7 [0.264]	21 [0.827]
2.4 mm up to 50 GHz	6.7 [0.264]	21 [0.827]

Notes  
All dimensions are in millimeters [inches].  
See page 3-13 for pin identification.

## RAMSES Series

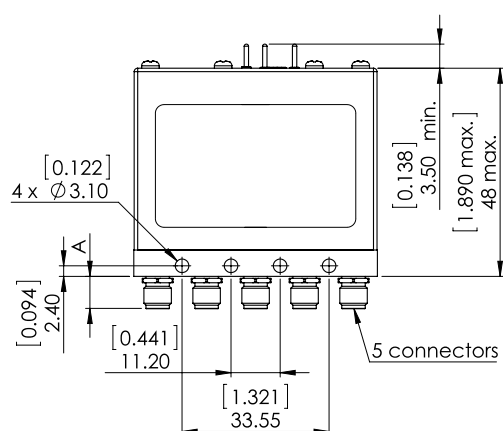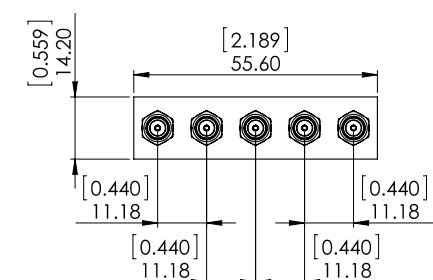

**NON-TERMINATED 5 PORT DP3T SWITCH**  
**R585 --- 0--**  
**R585 --- 1--**

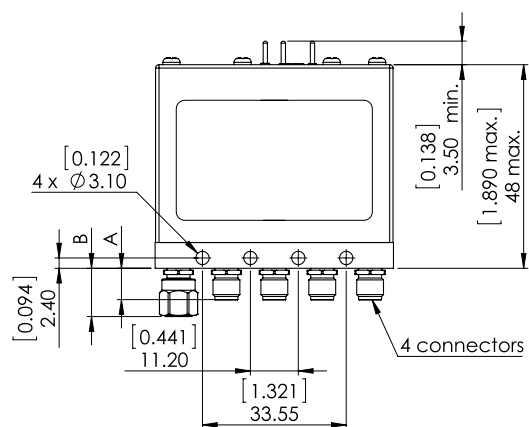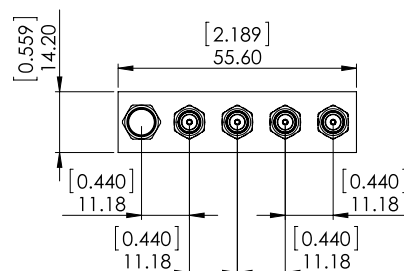

**TERMINATED 4 PORT BYPASS SWITCH/EXTERNAL TERMINATION**  
**R585 --- 6--**  
**R585 --- 7--**

CONNECTORS	A MAX (MM [INCHES])	B MAX (MM [INCHES]) IF APPLICABLE
SMA up to 18 GHz	7.7 [0.303]	13.5 [0.118]
SMA up to 26.5 GHz	7.7 [0.303]	21 [0.827]
SMA 2.9 up to 40 GHz	6.7 [0.264]	21 [0.827]
2.4 mm up to 50 GHz	6.7 [0.264]	21 [0.827]

**Notes**

All dimensions are in millimeters [inches].



See page 3-13 for pin identification.

## RAMSES Series

## R585 SERIES

## ACCESSORIES

A printed circuit board interface connector (ordered separately) has been designed for easy mounting on terminals.  
 For DP3T model R585 series = Radiall part number: R599910000.

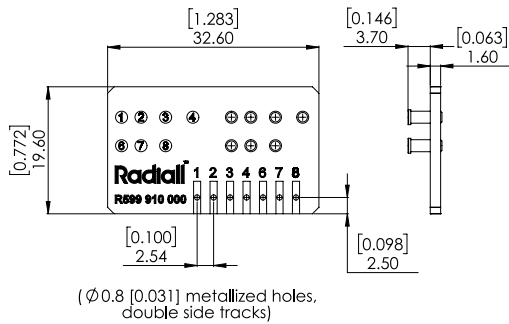

## Notes

All dimensions are in millimeters [inches].

PCB accessory pin number assignment is independant from the pin identification table of the switch.


## COAXIAL DP3T & TERMINATED SPDT

### R585 SERIES

#### FAILSAFE


#### WITHOUT OPTION

R585-1-000/R585-1-200/R585-1-400

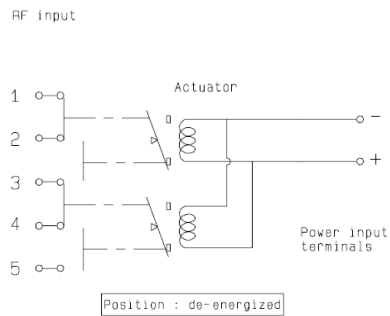


#### WITH INDICATOR CONTACT

R585-2-000/R585-2-200/R585-2-400

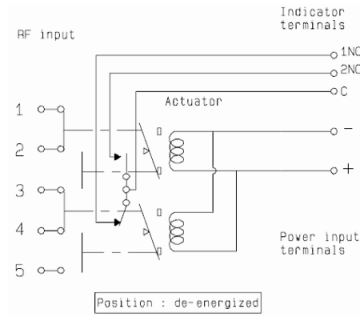


#### WITH SUPPRESSION DIODES

R585-1-030/R585-1-230/R585-1-430

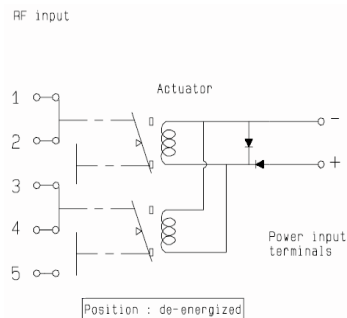


#### WITH SUPPRESSION DIODES & INDICATOR CONTACT

R585-2-030/R585-2-230/R585-2-430

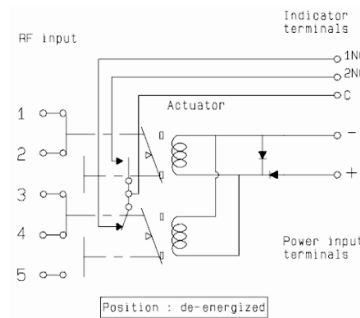


#### WITH TTL DRIVER (SUPPRESSION DIODES ARE INCLUDED)







R585-1-100/R585-1-300/R585-1-500

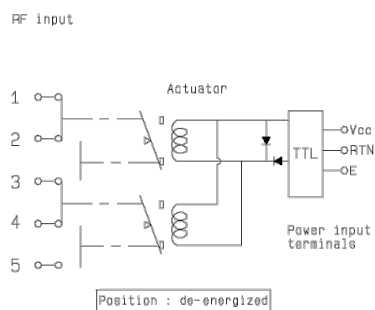

#### WITH TTL DRIVER & INDICATOR CONTACT

R585-2-100/R585-2-300/R585-2-500

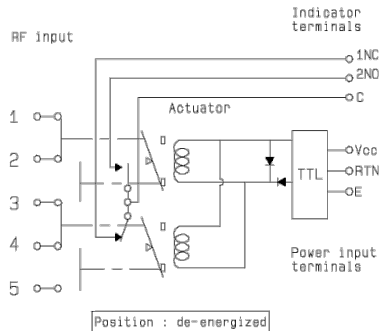

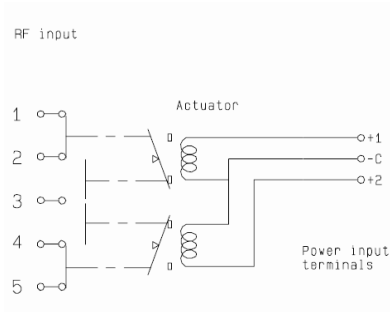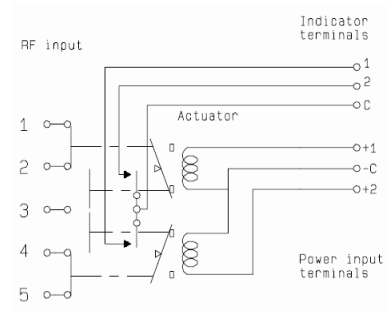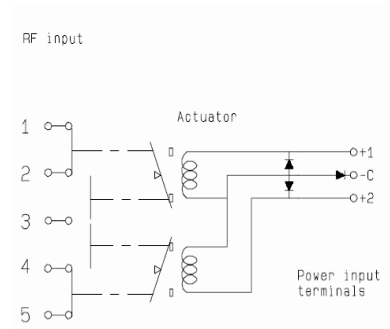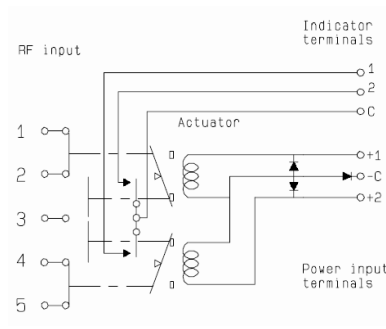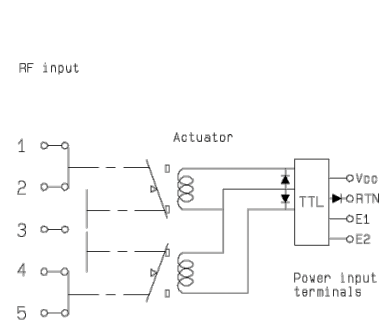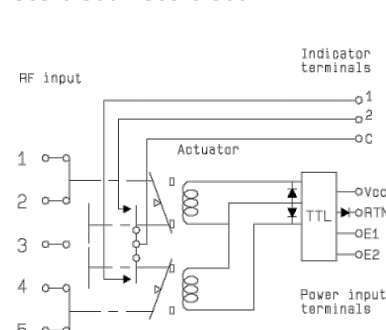
**COAXIAL DP3T & TERMINATED SPDT****R585 SERIES****NORMALLY OPEN****WITHOUT OPTION****R585-7-000/R585-7-200/R585-7-400****WITH INDICATOR CONTACT****R585-8-000/R585-8-200/R585-8-400****WITH SUPPRESSION DIODES****R585-7-030/R585-7-230/R585-7-430****WITH SUPPRESSION DIODES & INDICATOR CONTACT****R585-8-030/R585-8-230/R585-8-430****WITH TTL DRIVER (SUPPRESSION DIODES ARE INCLUDED)****R585-7-100/R585-7-300/R585-7-500****WITH TTL DRIVER & INDICATOR CONTACT****(SUPPRESSION DIODES ARE INCLUDED)****R585-8-100/R585-8-300/R585-8-500**

## COAXIAL DP3T & TERMINATED SPDT


### R585 SERIES

#### NORMALLY OPEN & LATCHING


##### WITH POSITIVE COMMON, NO OPTION R585-7-010/R585-7-210/R585-7-410

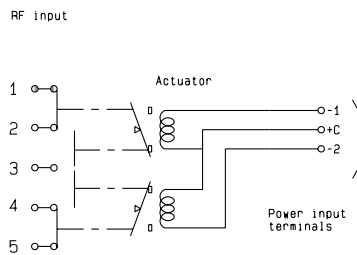


##### WITH POSITIVE COMMON & INDICATOR CONTACT R585-8-010/R585-8-210/R585-8-410

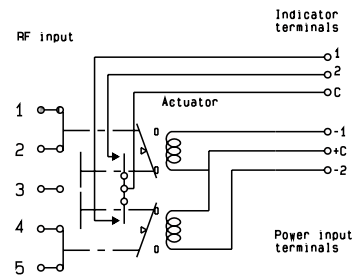


##### WITH POSITIVE COMMON & SUPPRESSION DIODES R585-7-040/R585-7-240/R585-7-440




##### WITH POSITIVE COMMON, INDICATOR CONTACT & SUPPRESSION DIODES R585-8-040/R585-8-240/R585-8-440

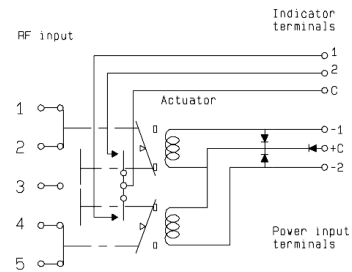

##### WITHOUT OPTION R585-3-000/R585-3-200/R585-3-400



##### WITH INDICATOR CONTACT R585-4-000/R585-4-200/R585-4-400






## COAXIAL DP3T & TERMINATED SPDT

### R585 SERIES

#### LATCHING


#### WITH SUPPRESSION DIODES

R585-3-030/R585-3-230/R585-3-430

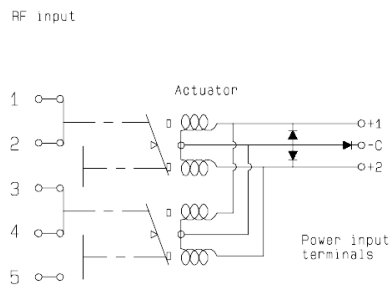


#### WITH SUPPRESSION DIODES & INDICATOR CONTACT

R585-4-030/R585-4-230/R585-4-430

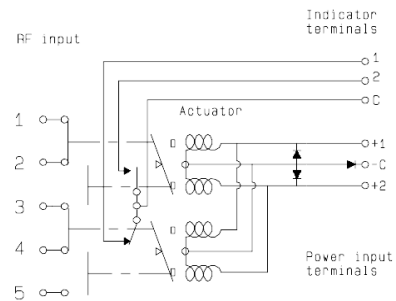


#### WITH TTL DRIVER (SUPPRESSION DIODES ARE INCLUDED)

R585-3-100/R585-3-300/R585-3-500

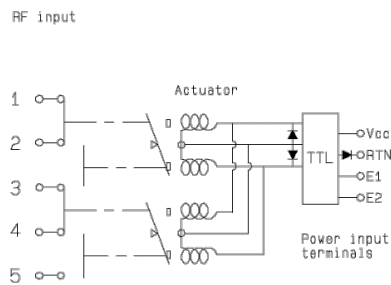


#### WITH TTL DRIVER & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)

R585-4-100/R585-4-300/R585-4-500

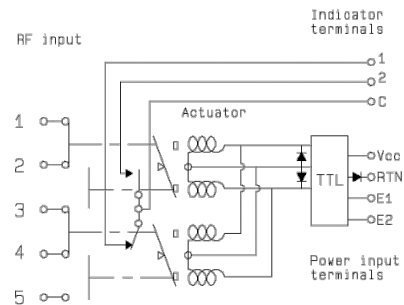


#### WITH CUT-OFF (SUPPRESSION DIODES ARE INCLUDED)

R585-5-000/R585-5-200/R585-5-400

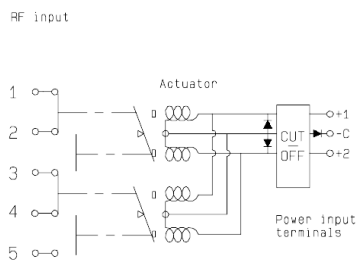

#### WITH CUT-OFF & INDICATOR CONTACT (SUPPRESSION DIODES ARE INCLUDED)

R585-6-000/ R585-6-200/R585-6-400

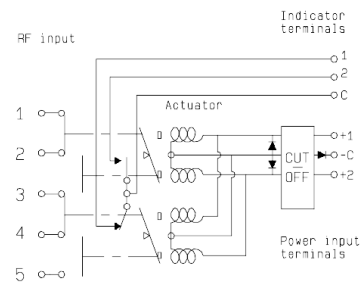


## COAXIAL DP3T & TERMINATED SPDT (CONTINUED)


### R585 SERIES

#### LATCHING


**WITH CUT-OFF & TTL DRIVER**  
(SUPPRESSION DIODES ARE INCLUDED)  
R585-5-100/R585-5-300/R585-5-500

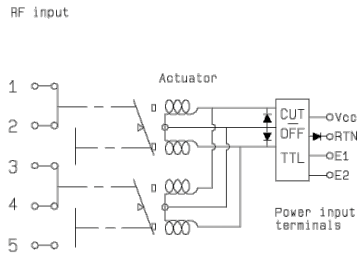


**WITH CUT-OFF, TTL DRIVER & INDICATOR CONTACT**  
(SUPPRESSION DIODES ARE INCLUDED)  
R585-6-100/R585-6-300/R585-6-500

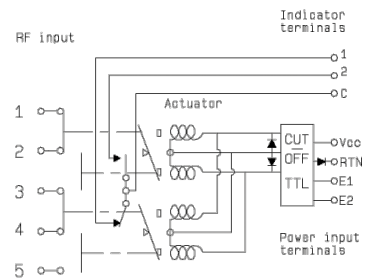


**WITH POSITIVE COMMON, NO OPTION**  
R585-3-010/R585-3-210/R585-3-410




**WITH POSITIVE COMMON & INDICATOR CONTACT**  
R585-4-010/R585-4-210/R585-4-410

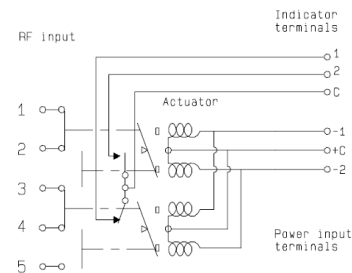

**WITH POSITIVE COMMON & SUPPRESSION DIODES**  
R585-3-040/R585-3-240/R585-3-440

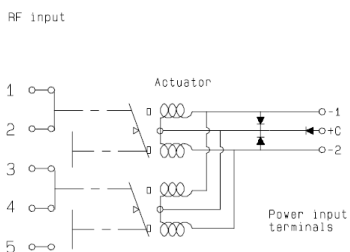


**WITH POSITIVE COMMON, SUPPRESSION DIODES & INDICATOR CONTACT**  
R585-4-040/R585-4-240/R585-4-440

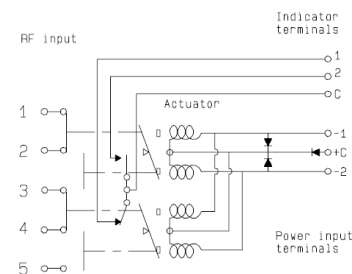


**COAXIAL DP3T & TERMINATED SPDT (CONTINUED)****R585 SERIES****LATCHING**


**WITH POSITIVE COMMON & CUT-OFF  
(SUPPRESSION DIODES ARE INCLUDED)  
R585-5-010/R585-5-210/R585-5-410**

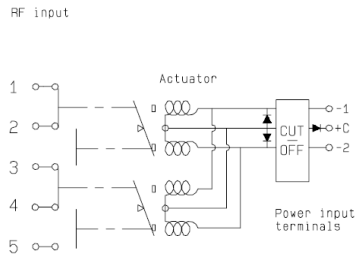

**WITH POSITIVE COMMON, CUT-OFF & INDICATOR CONTACT  
(SUPPRESSION DIODES ARE INCLUDED)  
R585-6-010/R585-6-210/R585-6-410**

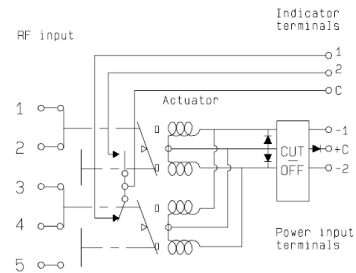**PIN IDENTIFICATION**


TYPE	PIN						
	1	2	3	4	6	7	8
Failsafe	+		-				
Failsafe + I.C.	+		-		2NO	1NC	C
Failsafe + TTL	E		RTN	VCC			
Failsafe + I.C. + TTL	E		RTN	VCC	2NO	1NC	C
Latching Latching + Cut-off	-2 or +2	-1 or +1	+C or -C				
Latching + I.C. Latching + I.C. + Cut-off	-2 or +2	-1 or +1	+C or -C		2	1	C
Latching + TTL Latching + TTL + Cut-off	E2	E1	RTN	VCC			
Latching + TTL + I.C. Latching + TTL + I.C. Cut-off	E2	E1	RTN	VCC	2	1	C
Normally open	-2 or +2	-1 or +1	+C or -C				
Normally open + I.C.	-2 or +2	-1 or +1	+C or -C		2	1	C
Normally open + TTL	E2	E1	RTN	VCC			
Normally open + TTL + I.C.	E2	E1	RTN	VCC	2	1	C

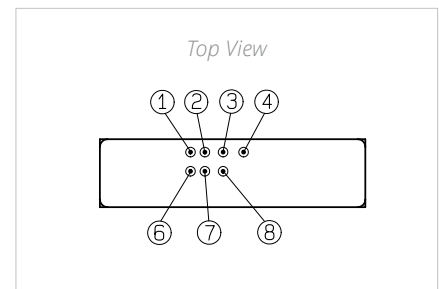

## Platinum Series

## HIGH PERFORMANCE DP3T & TERMINATED SPDT UP TO 40 GHz

### SMA - SMA 2.9

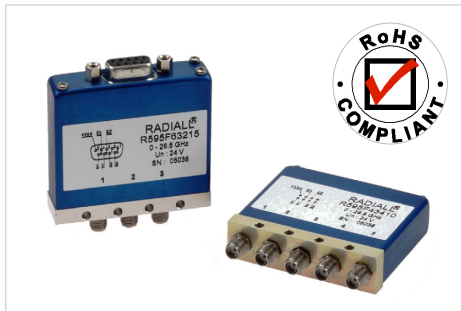

Radiall's PLATINUM series switches are optimized to perform at a high level over an extended life cycle. With outstanding RF performance, and a guaranteed insertion loss repeatability of 0.03 dB over a life span of 10 million switching cycles. PLATINUM series switches are perfect for automated test and measurement equipment, as well as signal monitoring devices.

*Example of P/N: R595F63215 is a Terminated SPDT SMA 26.5 GHz, latching with Self Cut-Off, 24 Vdc, Indicators, D-Sub connector.*

### PART NUMBER SELECTION

## R595

#### SERIES PREFIX

#### RF CONNECTORS

- 3: SMA up to 6 GHz <sup>[2]</sup>
- 4: SMA up to 20 GHz <sup>[2]</sup>
- F: SMA up to 26.5 GHz <sup>[2]</sup>
- 8: SMA 2.9 up to 40 GHz <sup>[1 & 3]</sup>

#### TYPE

- 3: Latching
- 4: Latching + I.C.
- 5: Latching + S.C.O.
- 6: Latching + S.C.O. + I.C.

#### ACTUATOR VOLTAGE

- 3: 24 Vdc
- 7: 15 Vdc

#### SWITCH MODEL

- 2: Terminated SPDT switch
- 3: Terminated 4 port bypass switch
- 4: Non-terminated 5 port DP3T switch

#### OPTIONS

- 1: Without option (positive common)
- 2: Compatible TTL driver

#### ACTUATOR TERMINALS

- 0: Solder pins
- 5: D-Sub connector

#### DOCUMENTATION

- : Certificate of conformity
- C: Calibration certificate
- R: Calibration certificate + RF curves

#### Notes

I.C.: Indicator contact/S.C.O.: Self Cut-Off.

1. Connector SMA 2.9 is equivalent to "K connector", registered trademark of Anritsu.
2. The terminated models are fitted with internal terminations.
3. The terminated models are fitted with external terminations.

## Platinum Series

## GENERAL SPECIFICATIONS

OPERATING MODE		LATCHING	
Nominal operating voltage (across operating temperature)	Vdc	24 (20 to 32)	15 (12 to 20)
Coil resistance (+/-10%)	$\Omega$	175	60
Nominal operating current at 23 °C	mA	140	250
Average power		RF path - Cold switching: see Power Chart on page 3-23 Hot switching: 1 Watt CW	
		Internal terminations - 1 Watt average into 50 $\Omega$ External terminations - 1 Watt average into 50 $\Omega$	
TTL input	High Level	3 to 7 V: 800 $\mu$ A max at 7 V	
	Low Level	0 to 0.8 V: 20 $\mu$ A max at 0.8 V	
Switching time (max)	ms	15	
Life (min)	SMA	10 million cycles	
	SMA 2.9	5 million cycles	
Connectors		SMA - SMA 2.9	
Actuator terminals		D-Sub 9 pin female Solder pins	
Weight	g	< 100	

## ENVIRONMENTAL SPECIFICATIONS


Operating temperature range	-25 °C to +75 °C
Storage temperature range	-55 °C to +85 °C
Temperature cycling (MIL STD 202F, Method 107D, Cond.A)	-55 °C to +85 °C (10 cycles)
Sine vibration operating (MIL STD 202, Method 204D, Cond.D)	10-2,000 Hz, 20 g
Random vibration operating	16.91 G (rms) 50-2,000 Hz 3 min/axis
Shock operating (MIL STD 202, Method 213B, Cond.G)	50 g/11 ms, sawtooth
Humidity operating	15 to 95% relative humidity
Humidity storage (MIL STD 202, Method 106E, Cond.E)	65 °C, 95% RH, 10 days
Altitude operating	15,000 ft (4,600 meters)
Altitude storage (MIL STD 202, Method 105C, Cond.B)	50,000 ft (15,240 meters)

## Platinum Series


## RF PERFORMANCE

PART NUMBER		R5953-----	R5954-----		R595F-----		R5958-----	
Frequency Range	GHz	DC to 6	DC to 20		DC to 26.5		DC to 40	
Impedance	Ω	50						
Insertion Loss (max)	dB	0.20 + (0.45 / 26.5) x frequency (GHz)						
Isolation (min)		85	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz	85 75 65	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz	85 75 65 60	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz 26.5 to 40 GHz	85 75 65 60 55
V.S.W.R. (max)		1.15	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz	1.15 1.25 1.30	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz	1.15 1.25 1.30 1.60	DC to 6 GHz 6 to 12.4 GHz 12.4 to 20 GHz 20 to 26.5 GHz 26.5 to 40 GHz	1.15 1.25 1.30 1.60 1.80
Repeatability (Up to 10 million cycles at 25 °C)		0.03 dB maximum					0.05 dB maximum	

## INSERTION LOSS &amp; ISOLATION

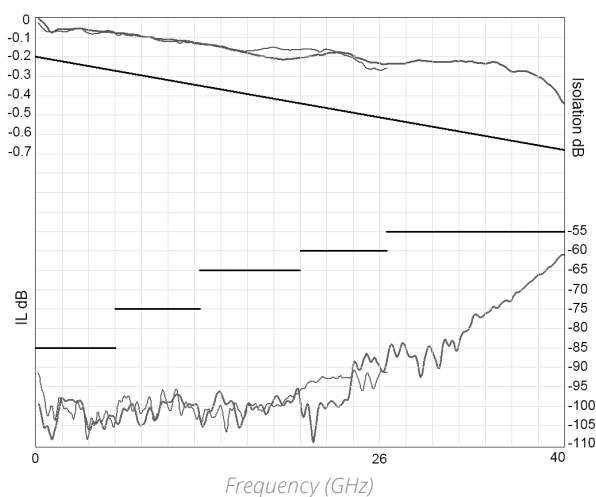

## V.S.W.R.

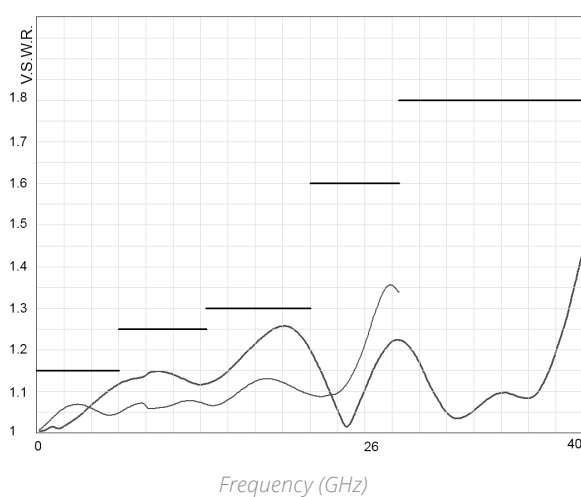

SMA — SMA 2.9 —


## Platinum Series

## SWITCH MODEL: NON-TERMINATED SPDT SWITCH


The terminated SPDT switch is a single pole double throw switch where unused ports are terminated into 50 ohms. This switch is considered a "break-before-make."

## RF Schematic Diagram

## POSITION E1




## POSITION E2




## Position Indicator

## STATE 11



## STATE 22




## Standard drive option "1"

(Positive common):


- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc)
- Select desired RF path by applying ground to the corresponding "close" pin (Ex: ground pin E1 to switch to position E1. RF path 1-2 closed and RF path 2-3 open)
- To open desired path and close the new RF path, connect ground to the corresponding "close" pin (Ex: ground pin E2 to open RF path 1-2 and close RF path 2-3)

## TTL drive option "2"


- Connect pin GND to ground
- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc)
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin. (Ex: apply TTL "High" to pin E1 to switch to position E1. RF path 1-2 closed and RF path 2-3 open)
- To open desired path and close the new RF path, apply TTL "High" to the "drive" pin which corresponds to the desired RF path. (Ex: apply TTL "High" to pin E2 to open RF path 1-2 and close RF path 2-3)




D-Sub connector



Solder pins



D-Sub connector



Solder pins









## Platinum Series

**SWITCH MODEL: TERMINATED 4-PORT BYPASS SWITCH**

The terminated 4 port bypass switch can terminate into the 50 ohms device under test.

This switch is considered a "break-before-make."

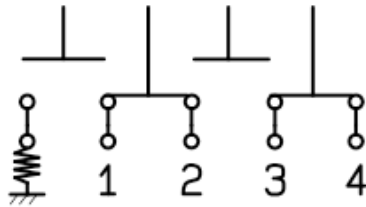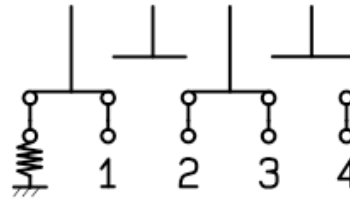
*RF Schematic Diagram***POSITION E1****POSITION E2***Position Indicators***STATE 11****STATE 22***Standard drive option "1"*

(Positive common):


- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc).
- Select desired RF path by applying ground to the corresponding "close" pin (Ex: ground pin E1 to switch to position E1. RF path 1-2 and RF path 3-4 closed and RF path 2-3 open).
- To open desired path and close the new RF path, connect ground to the corresponding "close" pin (Ex: ground pin E2 to open RF path 1-2 and 3-4 and close RF path 2-3).

*TTL drive option "2"*


- Connect pin GND to ground
- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc)
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin (Ex: apply TTL "High" to pin E1 to switch to position E1. RF path 1-2 and 3-4 closed and RF path 2-3 open)
- To open desired path and close the new RF path, apply TTL "High" to the "drive" pin which corresponds to the desired RF path (Ex: apply TTL "High" to pin E2 to open RF path 1-2 and 3-4 and close RF path 2-3)




D-Sub connector



Solder pins




D-Sub connector




Solder pins

## Platinum Series

## WITH D-SUB CONNECTOR

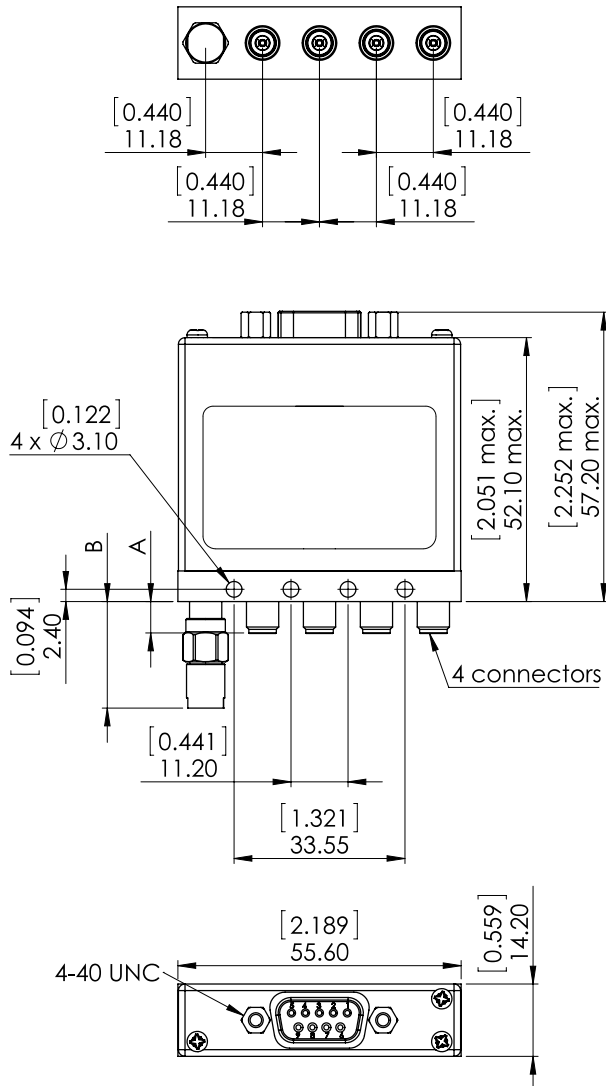

## WITH SOLDER PINS

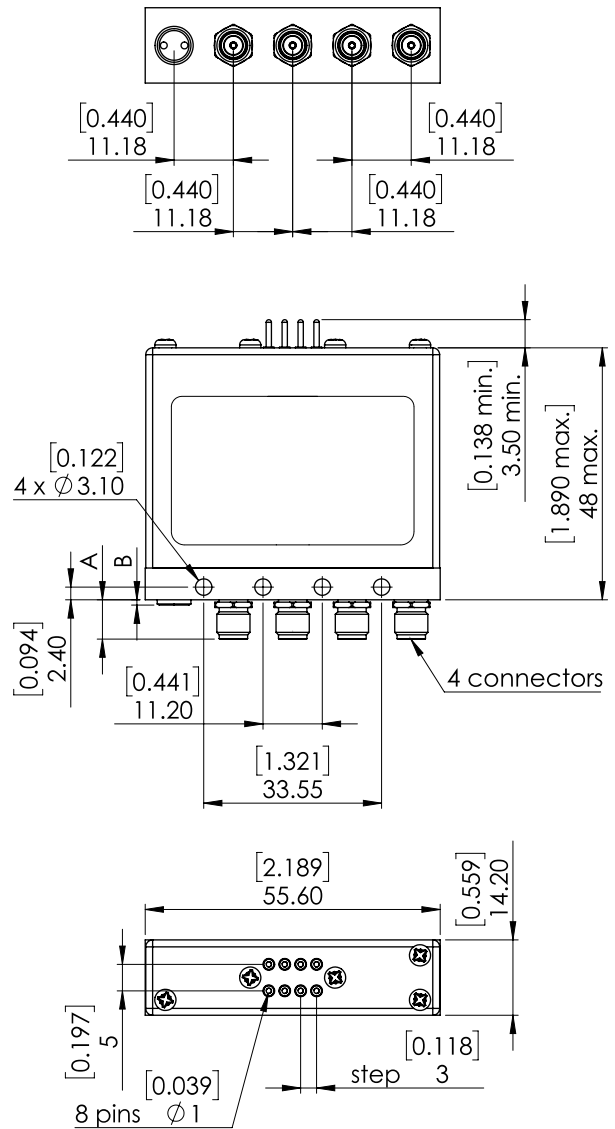





CONNECTORS	A MAX (MM [INCHES])	B MAX (MM [INCHES])	TERMINATIONS
SMA	7.7 [0.303]	1.5 [0.059]	Internal
SMA 2.9	6.7 [0.264]	21 [0.827]	External

## Notes

All dimensions are in millimeters [inches].

**SWITCH MODEL: TERMINATED 5-PORT DP3T SWITCH**

The non-terminated 5 port DP3T switch can be used as SPDT with high power terminations, as a bypass switch. In this application, the fifth port can be terminated externally with a high power termination. These switches are considered a "break-before-make."

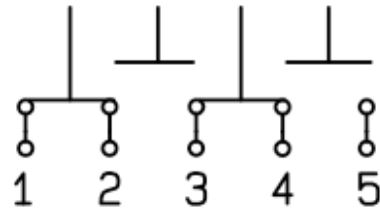
*RF Schematic Diagram***POSITION E1****POSITION E2***Position Indicators***STATE 11****STATE 22***Standard drive option "1"*

(Positive common):


- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc)
- Select desired RF path by applying ground to the corresponding "close" pin (Ex: ground pin E1 to switch to position E1. RF path 2-3 and RF path 4-5 closed and RF path 1-2 and RF path 3-4 open)
- To open desired path and close the new RF path, connect ground to the corresponding "close" pin (Ex: ground pin E2 to open RF path 2-3 and 4-5 and close RF path 1-2 and 3-4)

*TTL drive option "2"*


- Connect pin GND to ground
- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc)
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin (Ex: apply TTL "High" to pin E1 to switch to position E1. RF path 2-3 and RF path 4-5 closed and RF path 1-2 and 3-4 open)
- To open desired path and close the new RF path, apply TTL "High" to the "drive" pin which corresponds to the desired RF path. (Ex: apply TTL "High" to pin E2 to open RF path 2-3 and 4-5 and close RF path 1-2 and 3-4)




D-Sub connector



Solder pins




D-Sub connector




Solder pins

## NON-TERMINATED 5 PORT DP3T SWITCH

## WITH D-SUB CONNECTOR

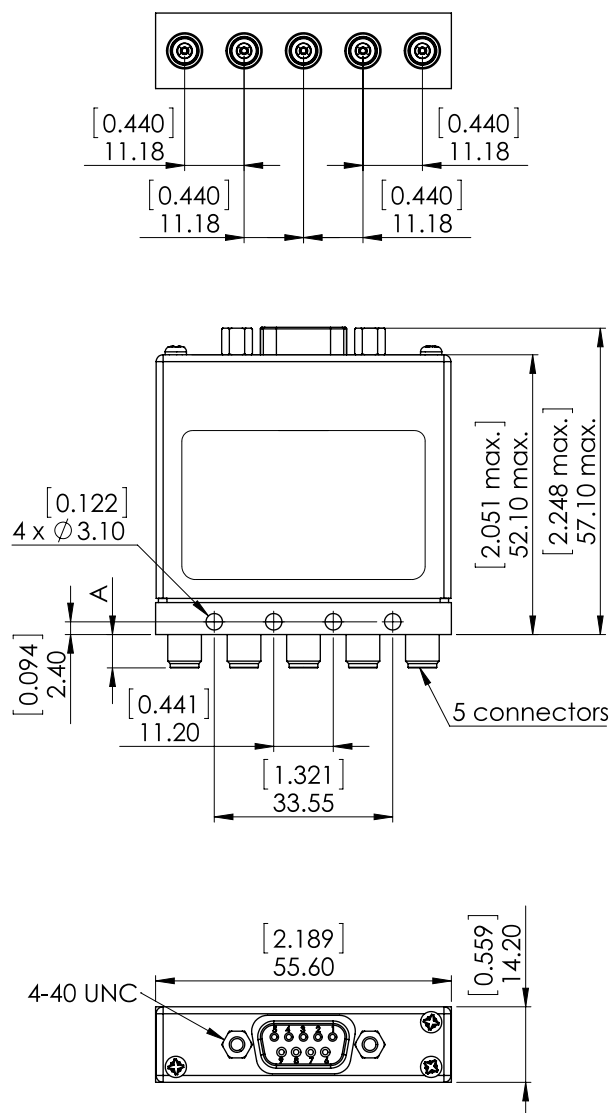

## WITH SOLDER PINS

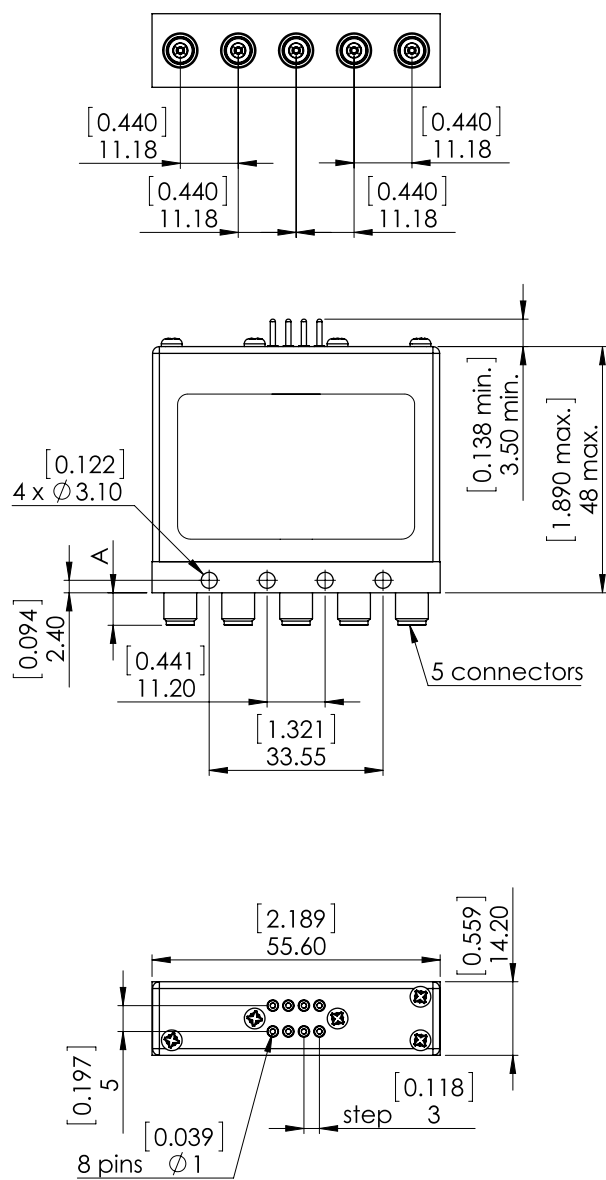

CONNECTORS	A MAX (MM [INCHES])
SMA	7.7 [0.303]
SMA 2.9	6.7 [0.264]


## Notes

All dimensions are in millimeters [inches].


**POWER RATING CHART**

This graph is based on the following conditions:

- Ambient temperature: + 25 °C
- Sea level
- V.S.W.R.: 1 and cold switching

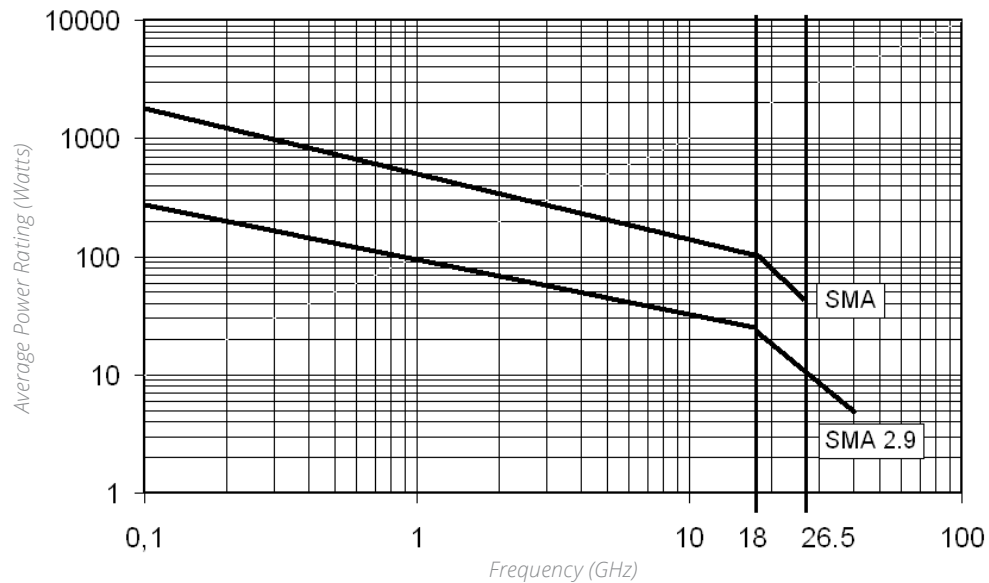**DERATING FACTOR VERSUS VSWR**

The average power input must be reduced for load V.S.W.R. above 1:1

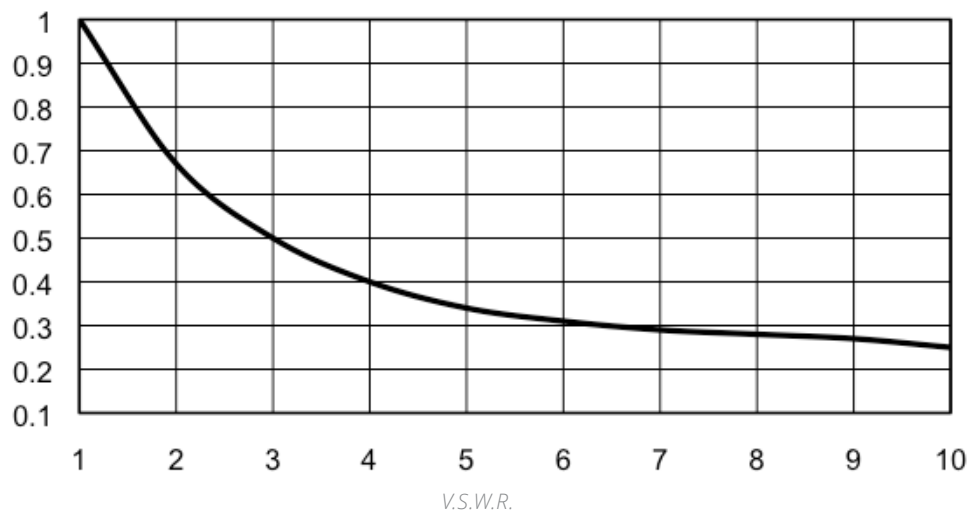


## Optional Features

## OPTIONAL FEATURES FOR DP3T SWITCHES

## GENERAL

RADIALl DP3T / SPDT terminated are only designed with SMA, SMA 2.9 and 2.4 mm connectors. For all other connectors (N, BNC etc.), the same function as SPDT terminated can be easily performed with a standard DPDT and an external load.

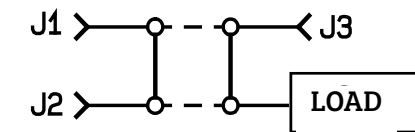

**POS 1 : J1 to J2 / J3 to load**

## EXAMPLES OF DEDICATED APPLICATIONS



This SPDT terminated switch is composed of a DP3T with SMA connectors, and cable load for medium power terminations. The Key advantage of this solution is the ability to mount the switch with external terminations at the desired power level.



This is an example of an SPDT terminated switch that was designed with two separate coils for a specific test network application.