

Contents

Introduction

Markets and Applications 10-2

Internal Standard Documents Compliance 10-2

Features and Benefits 10-2

Product Range Overview 10-2

S-Light

Features 10-3

Key Parameters 10-3

Available Options 10-3 to 10-4

Part Number Builder 10-5

D-Light

Key Parameters 10-6

Available Options 10-6 to 10-7

Part Number Builder 10-8 to 10-10

Evaluation Boards and Tooling 10-11

Introduction



With its D-Lightsys® range, Radiall offers optical transceiver components dedicated to harsh environments within the aerospace, space and defense markets. The optoelectronic D-Lightsys® modules are among the best performing in the world with very low power consumption and a minimum footprint. A complete range, from the transceiver to multichannel products, allows these devices to meet performance requirements in a large number of stringent applications.

They are dedicated to high speed data communications and provide data rates from 0.1 to 10 Gbps. D-Lightsys® modules offer high performance at very low consumption levels. Operational temperature from -55°C to +125°C and highly resistant to shock and vibrations, they can withstand the most demanding environments with unrivaled reliability. Modules are qualified per various MIL-AERO standards (ARINC 804) and are 100% tested over the whole operating temperature range. A full range of evaluation boards are also available for testing the D-Lightsys® modules.

MARKETS AND APPLICATIONS

D-Lightsys® devices are robustly designed for use in harsh environment applications such as:

Civil Aerospace

Airframe, avionics, In-Flight Entertainment (IFE), Heads Up Display (HUD), Power and flight management, pressurized/unpressurized areas transmissions, sensors

Military Aerospace

Avionics, weapons systems, power and flight management, sensors

Data Transmissions

High speed data networking

Radars

Remote antennas, phase array radar, satellite

Navy & Shipboard

Missile systems, communication

Geophysics

Oil and gas, mining, exploration with streamers arrays, roofers and shearing equipment



INTERNATIONAL STANDARD DOCUMENTS COMPLIANCE

- IEEE standard 802.3z Gigabit Ethernet 1000 Base-Sx PMD
- ARINC 804, 815, and 818 standards
- Control and monitoring compliant with SFF-8472 standard



FEATURES AND BENEFITS

- Data rate up to 10 Gbps
- Use 850 nm VCSEL emitters
- Control and monitor compliant with MSA SFF-8472
- Monitoring of the optical power of emitters over the temperature range
- Low power consumption
- Standard electrical SMT interface or solderless interface option
- Pigtailed optical interconnect solutions (MultiMode fibers)
- Very small form factor

PRODUCT RANGE OVERVIEW

D-lightsys® products are divided in two main families:

- S-light: single channel modules
- D-light: multichannel modules

S-Light



The S-Light range includes single channel optical transceivers for harsh environment applications available in transmitter, receiver and transceiver modules. Several package options are offered from surface mount, pluggable and custom packages.

FEATURES

- Uses 850 nm VCSEL'S
- Controls and monitoring compliant with SFF-8472 standard
- Monitoring of the optical power over the temperature range
- Standard electrical SMT interface or pluggable interface option
- Provided with 50/125 μm or 62.5/125 μm optical fiber

All the D-Lightsys® devices can be fully monitored and/or controlled through a I²C 2-wire serial interface and are suitable for a variety of applications:

- Average and modulation currents of the VCSEL laser are both digitally programmable through the 2-wire serial interface.
- A versatile input stage allows 100 Ω differential or 50 Ω to ground termination resistors to comply with CML or LVDS signaling levels.
- Analog outputs allow the monitoring of the module state and performance.

KEY PARAMETERS

| Parameters | Value | Units | Notes |
|--|----------|-------|---|
| Data rate (max) | 10 | Gbps | 2 ranges available 0.1-4.25 Gbps 0.5-10 Gbps |
| Transceiver case operating temperature | -55/+125 | °C | Qualified temperature range -40°C/+90°C |
| Power supply voltage | 3.3 | V | |
| Transceiver power consumption (max) | <300 | mW | Over the full temperature range |
| Average output power (min) | -4 | dBm | S-Light family transmitters are Class 1M laser products according to IEC 60825-1 standard |
| Optical extinction ratio | 9 | dB | @2.5 Gbps ER= 5 dB @10 Gbps |
| Optical sensitivity | -20 | dBm | @2.5 Gbps, for BER=10 ⁻¹² measured with a 2 ⁷ -1 PRBS signal -10 dBm @ 10 Gbps |

Detailed technical datasheets are available upon request. Please contact your local representative.

AVAILABLE OPTIONS

| Part Definition | Available Options | Description |
|-----------------|-------------------|---|
| Module type | Transmitter | 1 emitting channel (1 fiber) |
| | Receiver | 1 receiving channel (1 fiber) |
| | Transceiver | 1 emitting channel + 1 receiving channel (2 fibers) |

For any additional information, please contact your local Radiall representative.
Reliability and qualification reports are available upon request.

S-Light

| Available Package Options | Dimensions | |
|--|------------|--|
| 48 pin LCC package (Direct board soldering) | | |
| 10 pin SFF package | | |
| 40 pin SAMTEC YFT (Socket pluggable) | | |
| 40 pin SAMTEC YFT (Narrow socket) | | |

AVAILABLE TERMINI/CONNECTORS:

- LuxCis® ARINC 801/EN4639
- ABS1379/EN4531
- LC
- FC
- ST
- SC

AVAILABLE OPTICAL FIBERS:

- MultiMode 50/125 µm OM2
- MultiMode 62.5/125 µm




For any additional information, please contact your local Radiall representative.

S-Light

SINGLE-CHANNEL OPTICAL TRANSMITTERS, RECEIVERS AND TRANSCEIVERS FOR HARSH ENVIRONMENTS

PART NUMBER BUILDER


SLx-ww-ix-Pyz-Lvv

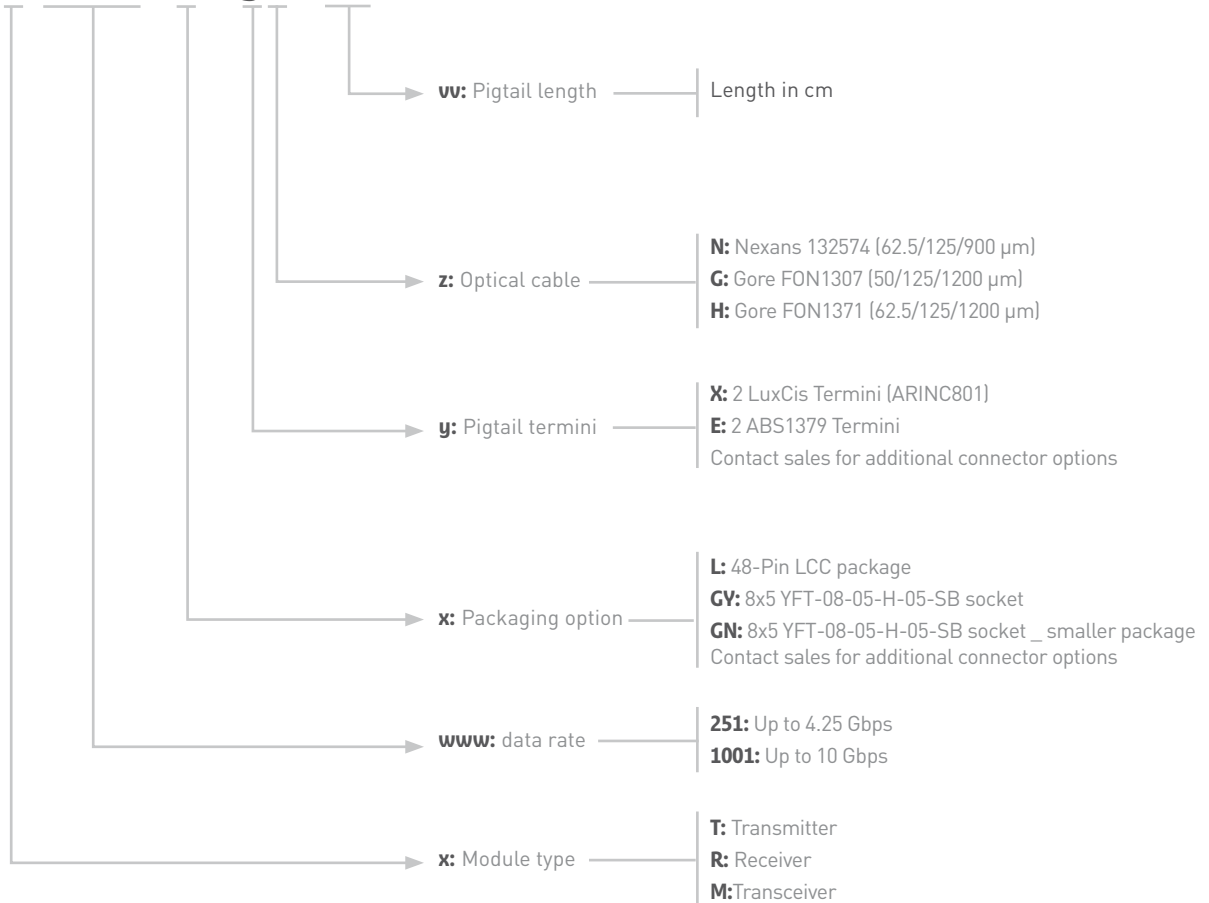

ACTIVE OPTICS

To validate your part number please contact your local Radiall representative. Technical datasheets are available upon request.

D-Light



The D-Light range includes multi channel optical transceivers for harsh environment applications available in transmitter, receiver and transceiver modules with 4 channels (4 Rx + 4 Tx). Several package options are offered from surface mount to pluggable packages.

KEY PARAMETERS

| Parameters | Value | Units | Notes |
|--|----------|-------|---|
| Data rate (Max) | 10 | Gbps | Several ranges available For emitters & receivers: 0.1-4.5 Gbps (per channel) 0.5-10 Gbps (per channel) For transceivers: 0.1-3.25 Gbps (per channel) 0.5-10 Gbps (per channel) |
| Transceiver case operating temperature | -55/+100 | °C | Qualified temperature range -40°C/+85°C |
| Power supply voltage | 3.3 | V | |
| Transceiver power consumption (Max) | 125 | mW | Over the full temperature range per channel |
| Average output power (min/channel) | -4 | dBm | D-Light family transmitters are Class 1M laser products according to IEC 60825-1 standard |
| Optical extinction ratio | 9 | dB | @2.5 Gbps |
| Optical sensitivity | -19 | dBm | @2.5 Gbps, for BER=10 ⁻¹² measured with a 2 ⁷ -1 PRBS signal -16 dBm @ 3.25 Gbps -12 dBm @ 10Gbps |

AVAILABLE OPTIONS

| Part Definition | Available Options | Description |
|-----------------|-------------------|--|
| Module type | Transmitter | 2 or 12 emitting channels |
| | Receiver | 2 or 12 receiving channels |
| | Transceiver | 4 emitting channels + 4 receiving channels |

Reliability and qualification reports are available upon request.


For any additional information, please contact your local Radiall representative.

D-Light

| Available Package Options | Dimensions | |
|---------------------------|------------|--|
| 48 pin LCC package | | |
| 100 pins package | | |

AVAILABLE TERMINI/CONNECTORS:

- 12 channels optical connector: MPO and/or connector compliant with IEC Standard 61754-7 and TIA 604-5
- 12 channels optical ferrule: MT ferrule only or MT ferrule with Radiall MT cartridge

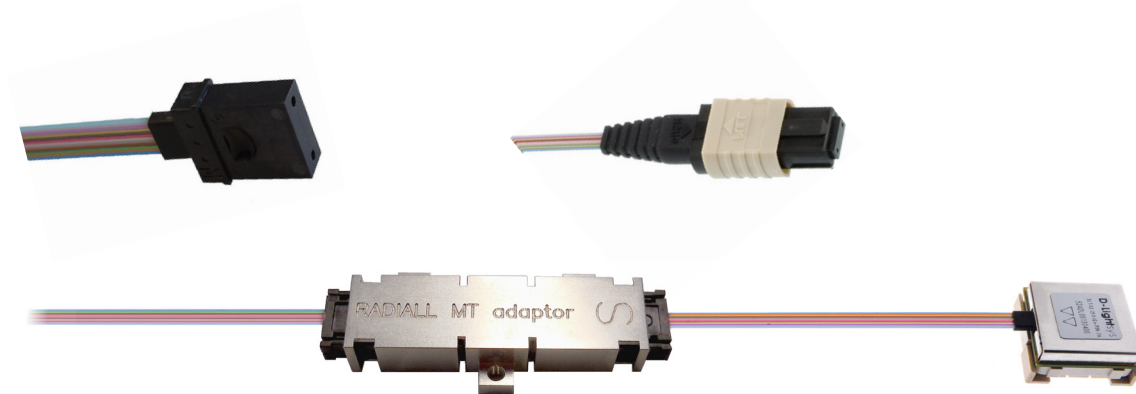

AVAILABLE OPTICAL FIBERS:

- MultiMode 50/125 μm OM2 - ribbon 12 fibers (single fiber cable is available for DLR-02/DLT-02)
- MultiMode 62.5/125 μm - ribbon 12 fibers (single fiber cable is available for DLR-02/DLT-02)

For any additional information, please contact your local Radiall representative.

D-Light

MULTI-CHANNEL OPTICAL TRANSMITTERS FOR HARSH ENVIRONMENTS

PART NUMBER BUILDER

DLT-cc-www-Ix-Pyz-Lvv




To validate your part number please contact your local Radiall representative. Technical datasheets are available upon request.

MULTI-CHANNEL OPTICAL RECEIVERS FOR HARSH ENVIRONMENTS

PART NUMBER BUILDER

DLR-cc-www-Ix-Pyz-Lvv

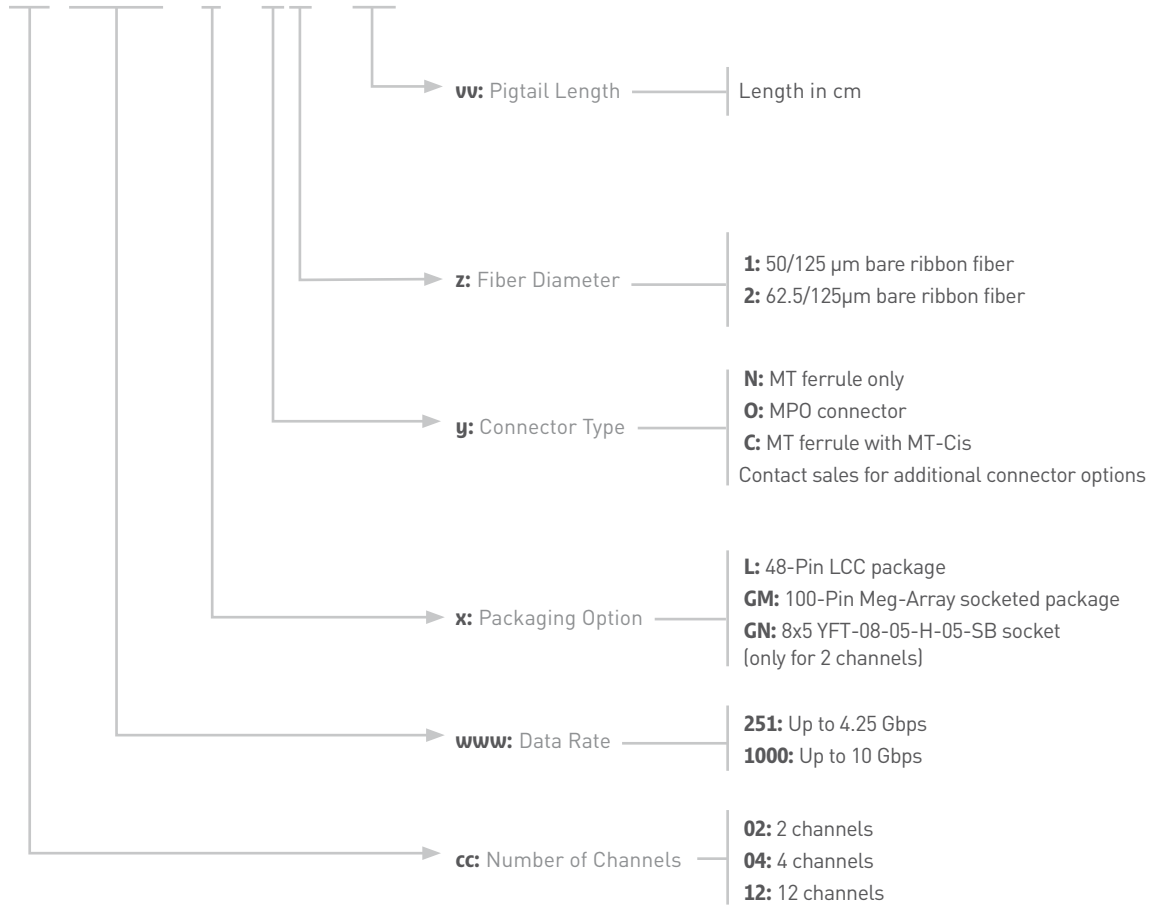


To validate your part number please contact your local Radiall representative. Technical datasheets are available upon request.

D-Light

MULTI-CHANNEL OPTICAL TRANSCEIVERS FOR HARSH ENVIRONMENTS


PART NUMBER BUILDER

DLM-cc-www-Ix-Pyz-Lvv

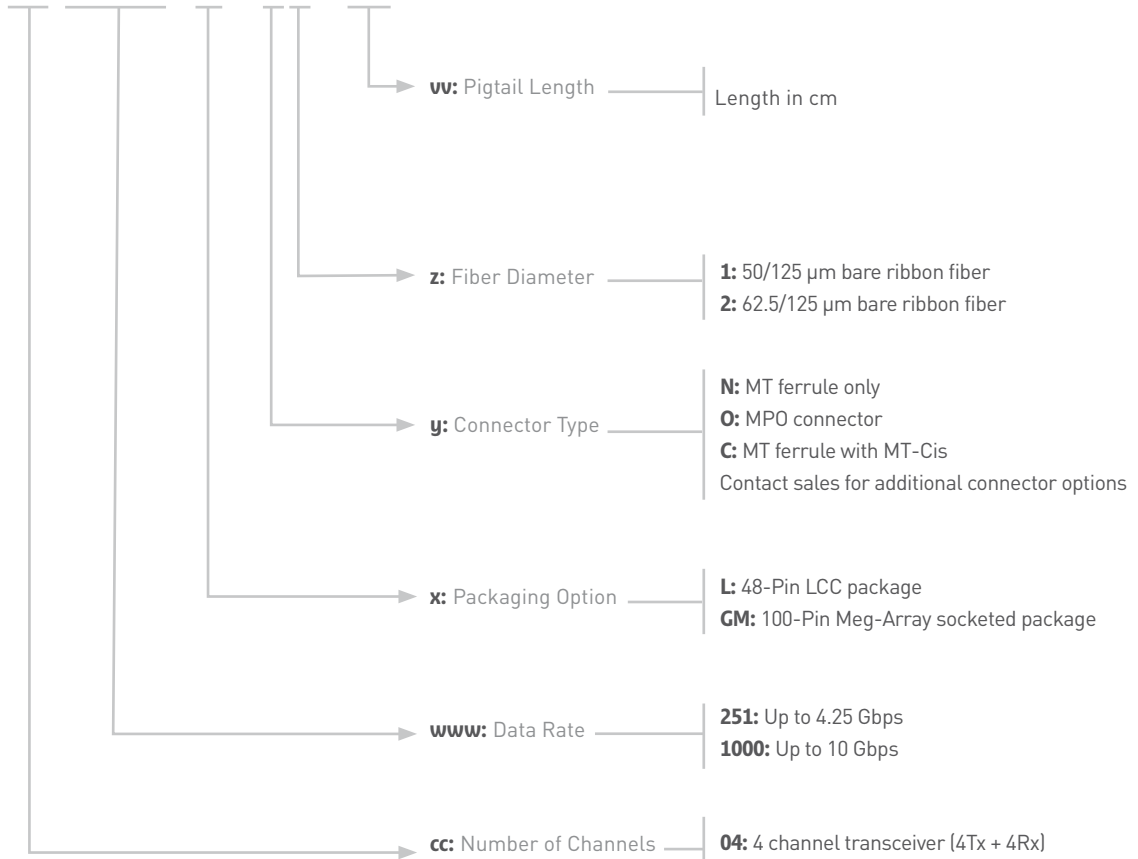

To validate your part number please contact your local Radiall representative. Technical datasheets are available upon request.

Evaluation Boards and Tooling



Radiall offers a full range of evaluation boards enabling full monitoring of S-Light and D-Light modules, either for the pluggable package or for the LCC package.

A Windows PC-Based software is available for complete module monitoring and control.

Application notes for layout considerations are also available. Please contact your local representative for more information.

GENERAL EVALUATION BOARD SPECIFICATIONS

| Parameter | Symbol | Min | Type | Max | Unit |
|--------------------------|--------|-----|------|------|------|
| External supply voltage | VCC | 1.2 | 7.0 | 15 | V |
| Supply voltage noise | NVCCx | - | - | 150 | mV |
| Supply current (Tx + Rx) | ICC | - | - | 500 | mA |
| Operating temperature | Top | -40 | - | +100 | °C |

Notes
