


Series
NSX

T-CAS SIZE 1 COAXIAL SOCKET CONTACT CRIMP TERMINATION FOR
50MFCFB AND ECS 311201 CABLES

Issue:
Mar. 13, 2017

Page
1/1

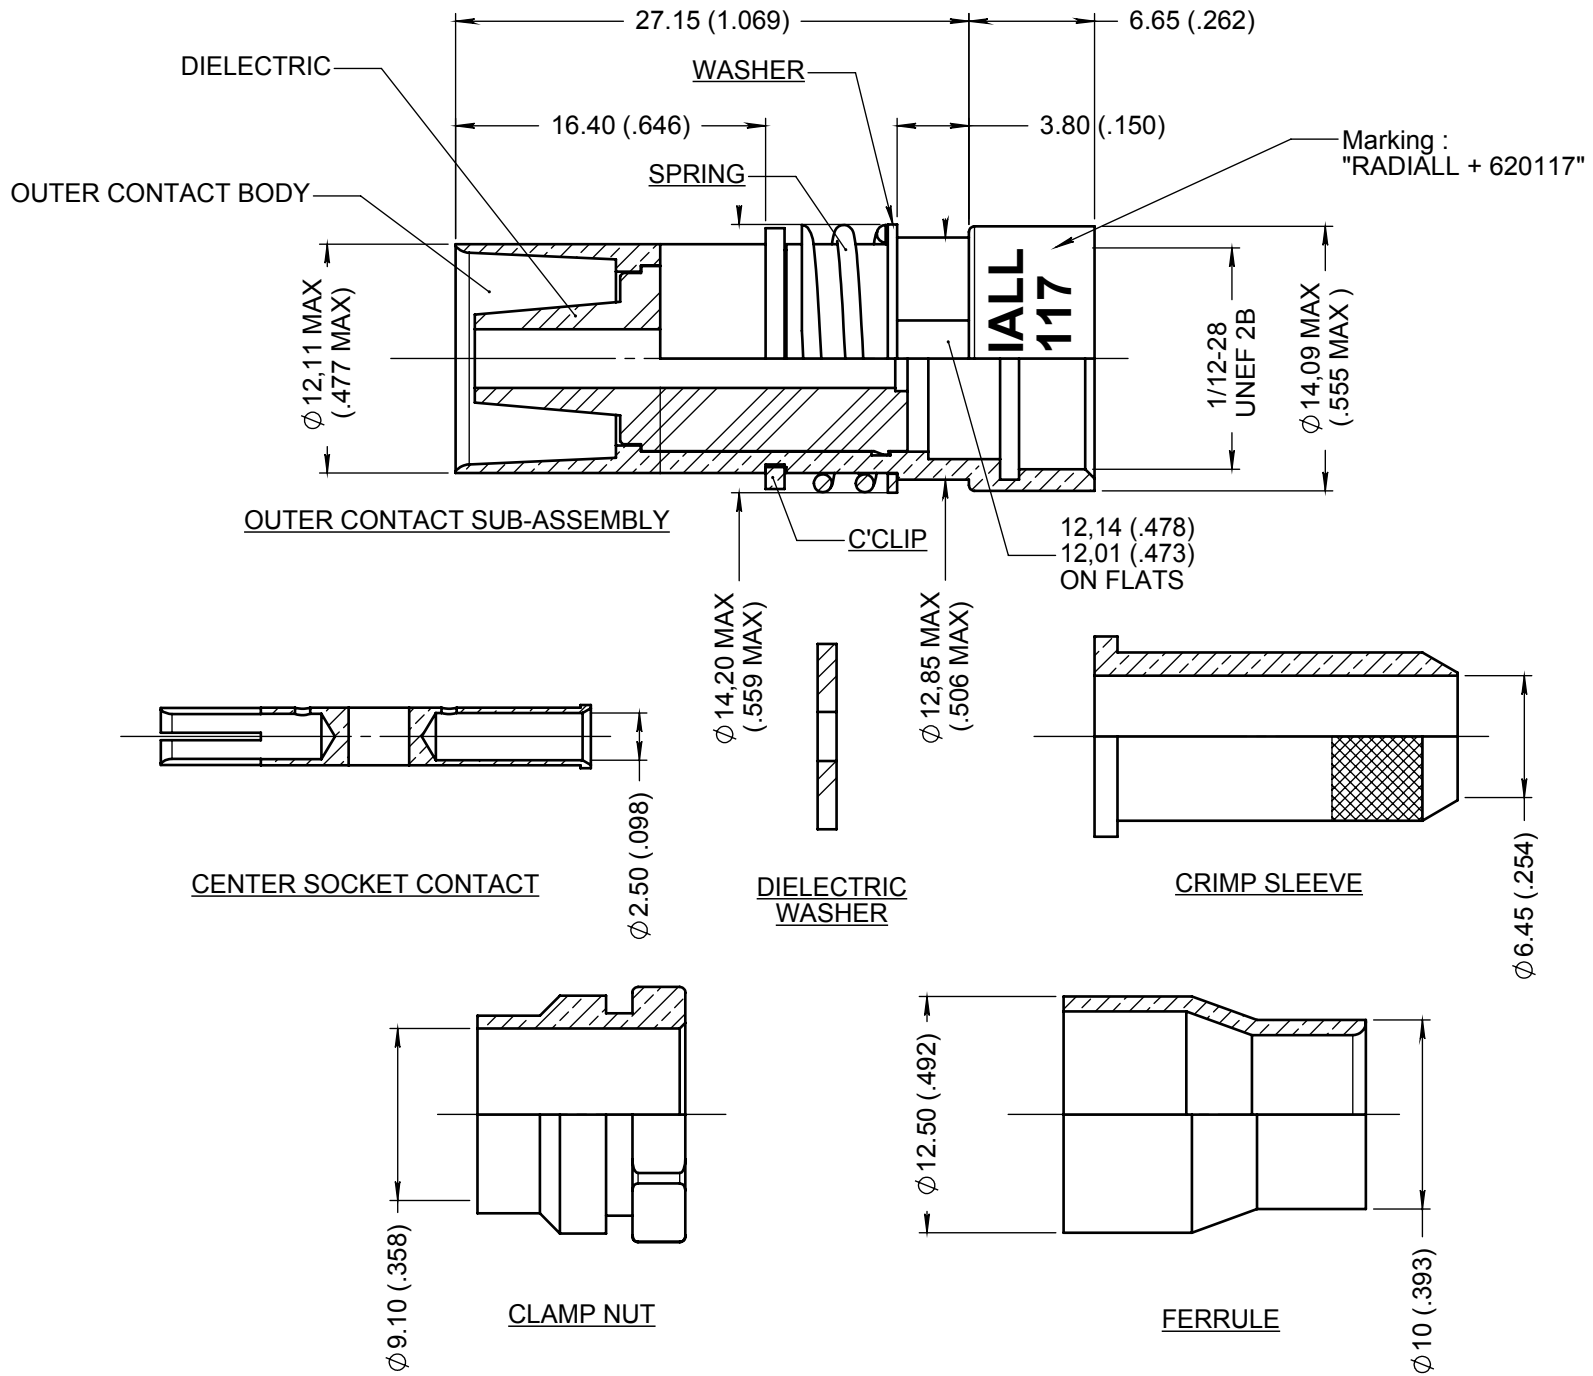

WIRING INSTRUCTIONS: SEA DRAWING RP6176

MATERIAL:

- OUTER CONTACT BODY AND CENTER CONTACT: BERYLLIUM COPPER PER ASTM-B-196
- DIELECTRIC AND DIELECTRIC WASHER: PTFE PER ASTM-D-1710 OR EQUIVALENT
- CRIMP SLEEVE: BRASS PER ASTM-B-16 / B-16M
- FERRULE: BRASS PER ASTM B 453/B453 M
- CLAMP NUT: COPPER ALLOY
- SPRING, C'CLIP AND WASHER: STAINLESS STEEL PER SAE-AMS 5688


FINISH:

- OUTER CONTACT BODY, CRIMP SLEEVE, CENTER CONTACT, CLAMP NUT AND FERRULE: PLATING .00005 INCH OF GOLD PER MIL-G-45204 TYPE I OR II GRADE C OR D CLASS 1 OVER NICKEL QQ-N-290
- WASHER: PASSIVATED
- C'CLIP: NICKEL PROTECTED

ELECTRICAL CHARACTERISTICS:

- IMPEDANCE : 50 OHMS
- DIELECTRIC WITHSTANDING VOLTAGE : 1500 V

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 27 g

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION				
PEN:				
NOM: FALETTI	Mar. 13, 17	Updated flat dimension per ARINC 600	Pécault B.	Legendre T.
DATE: Nov. 29, 1989	Sept. 13, 16	Added marking representation	Legendre T.	Branjonneau
APPR.: /	Aug. 25, 09	Suppressed E0692WN and E0406WD cables	Mondot JC.	Brochet L.
	Issue	Revisions	Name	Approved

620117EN

RADIALL PROPRIETARY INFORMATION

RADIALL PROPRIETARY INFORMATION