


Series
NSX

SIZE 12 FRONT RELEASE, FRONT REMOVABLE
PC POST PIN CONTACTS

Issue:
Dec. 16, 2008

Page
1/1

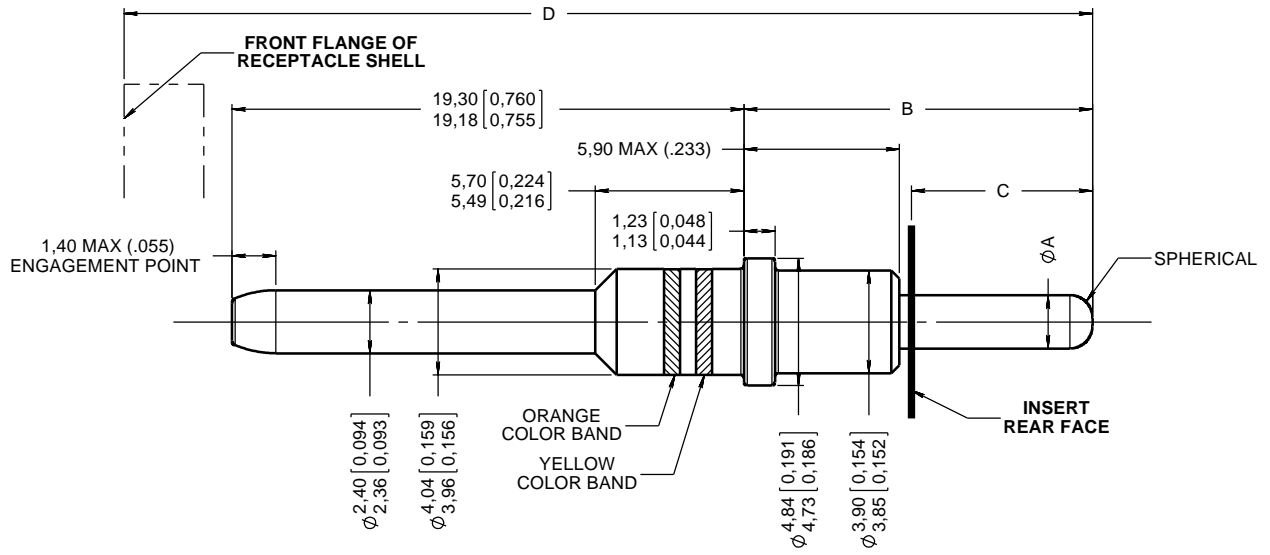


	CTS P/N	Type	ØA		B		C EXTENSION / INSERT REAR FACE		D EXTENSION / FRONT FLANGE OF SHELL	
			BEFORE TINNING	AFTER TINNING	BEFORE TINNING	AFTER TINNING	BEFORE TINNING	AFTER TINNING	BEFORE TINNING	AFTER TINNING
			NOT TINNED	620 244 018	YA		NA	10,55 (.416)	NA	4,60 (.181)
TIN LEADED	620 244 019	ZA	Ø2,10 (.083)	2,20 MAX (.087)	10,35 (.407)	11,05 MAX (.436)	3,80 (.150)	5,10 MAX (.200)	33,80 (1.330)	35,70 MAX (1.405)
ROHS TINNED	620 244 518	RA	Ø2,00 (.079)							
NOT TINNED	620 244 005	Y		NA	13,15 (.518)	NA	7,20 (.283)	NA	37,80 (1.488)	NA
TIN LEADED	620 244 016	Z	Ø2,10 (.083)	2,20 MAX (.087)	13,00 (.511)	13,65 MAX (.538)	6,40 (.252)	7,70 MAX (.303)	36,40 (1.433)	38,30 MAX (1.508)
ROHS TINNED	620 244 505	R	Ø2,00 (.079)							
NOT TINNED	620 244 003	YB		NA	16,25 (.640)	NA	10,30 (.406)	NA	41,00 (1.614)	NA
TIN LEADED	620 244 008	ZB	Ø2,10 (.083)	2,20 MAX (.087)	16,05 (.631)	16,75 MAX (.660)	9,50 (.374)	10,80 MAX (.425)	39,60 (1.559)	41,50 MAX (1.634)
ROHS TINNED	620 244 503	RB	Ø2,00 (.079)							
NOT TINNED	620 244 021	YC		NA	19,55 (.770)	NA	13,60 (.535)	NA	44,20 (1.740)	NA
TIN LEADED	620 244 022	ZC	Ø2,10 (.083)	2,20 MAX (.087)	19,35 (.761)	20,05 MAX (.790)	12,80 (.504)	14,10 MAX (.555)	42,80 (1.685)	44,70 MAX (1.760)
ROHS TINNED	620 244 521	RC	Ø2,00 (.079)							

MATERIAL :
- BRASS

FINISH :
- BODY : PLATING .00005 INCH OF GOLD PER MIL-G-45204 TYPE I OR II, GRADE C OR D, CLASS 1 OVER NICKEL PER QQ-N-290
PWD SOLDER CONTACT AREA WHICH IS : - TIN LEADED PER QQ-S-571
- ROHS TINNED

EXTRACTION TOOL : RADIALL 282 549 005

DIMENSIONS : mm (inch are given for information only)



This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION					
PEN:					
NOM: LEGENDRE T.					
DATE: Dec. 16, 2008					
APPR.: BROCHET L.	/	/	/	/	
	Issue	Revisions	Name	Approved	