

A satellite is shown in orbit against a backdrop of a starry space and the Earth's horizon. The satellite has a cylindrical body with various instruments and two long solar panel arrays extending outwards. The Earth below shows a mix of blue oceans and white clouds.

SPACE SOLUTIONS



Booklet



SIMPLIFICATION IS OUR INNOVATION

Radiall 

- *Payloads*
- *Equipment*
- *Launchers*
- *Constellations*
- *Ground testing*

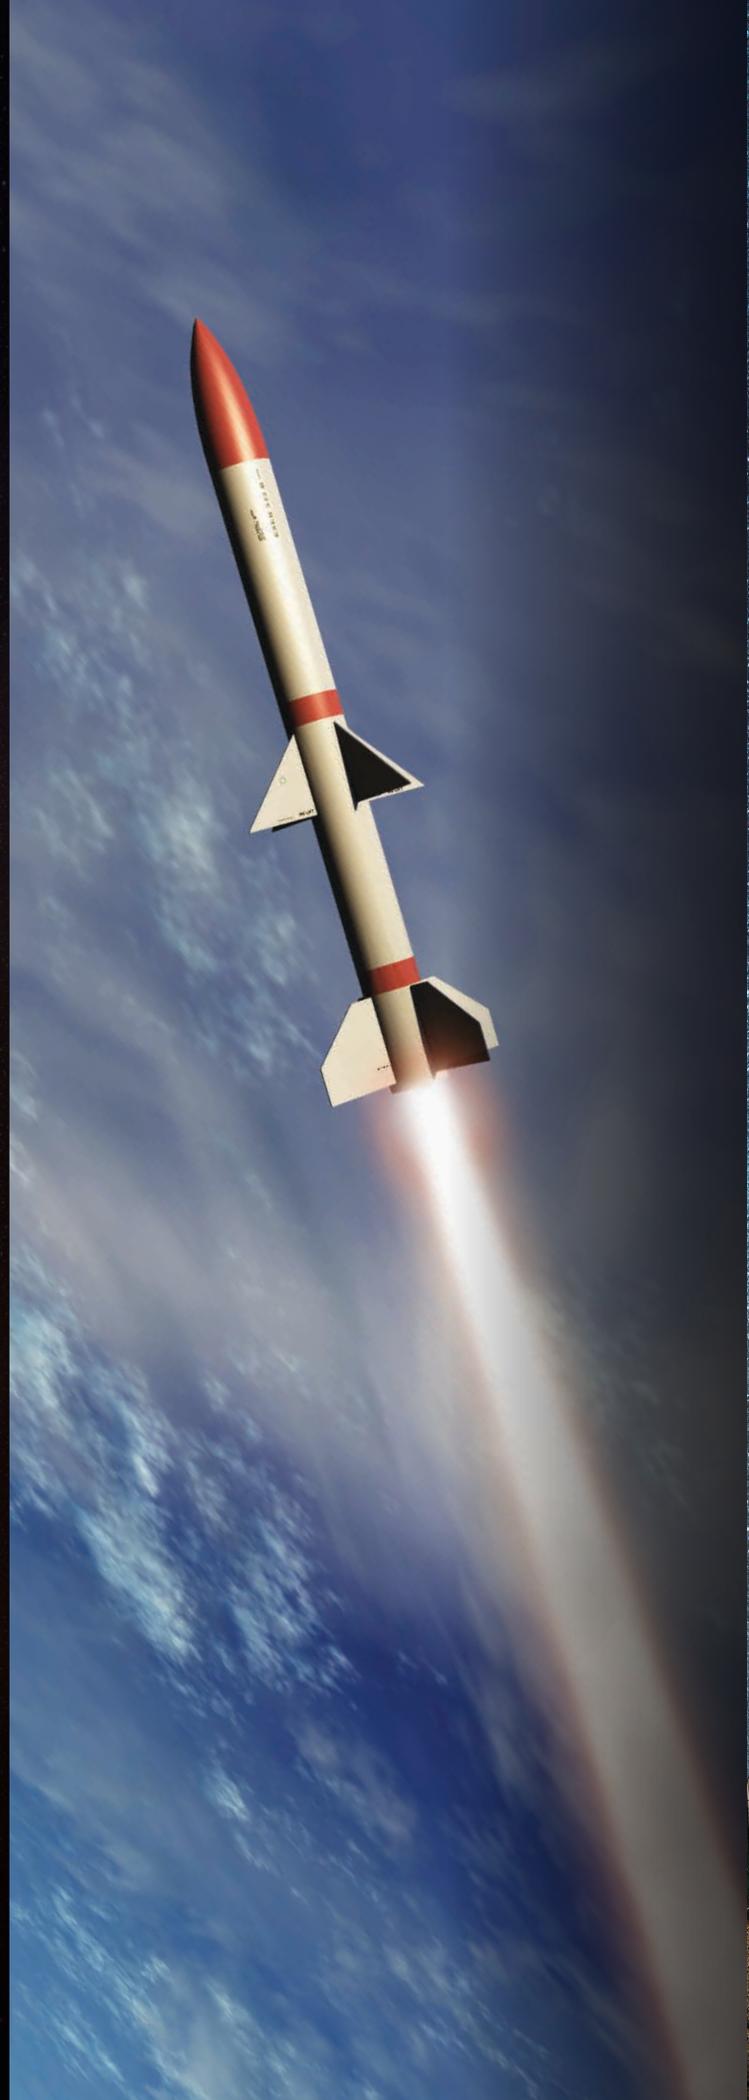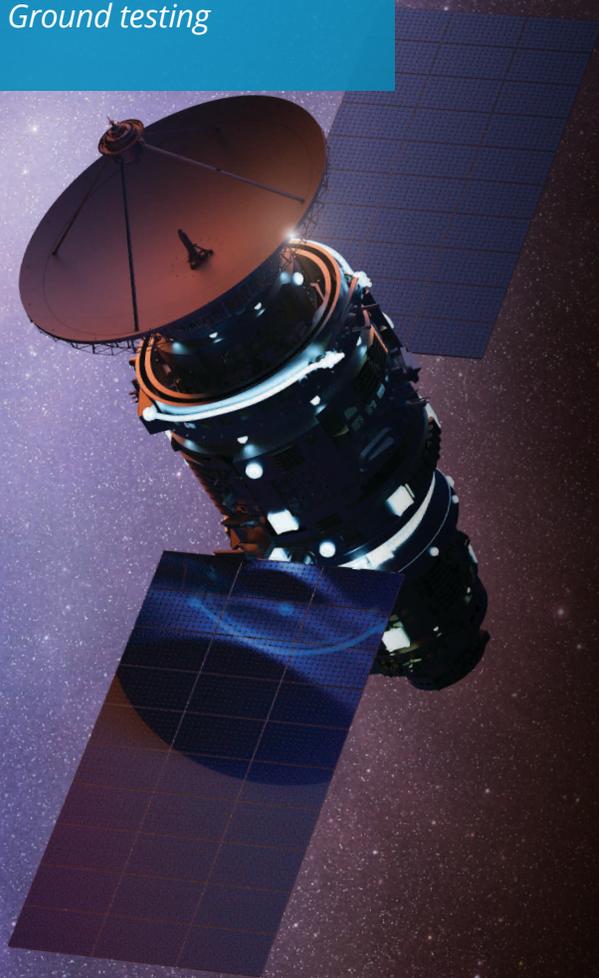

FOREWORD

Radiall is the preferred choice across the globe when quality, reliability and performance are mission critical. With involvement in more than 300 satellite programs since 1974, our competitive solutions have established a strong reputation.

Our complete range of space-qualified products with a frequency range up to Q-band includes:

- *RF connectors*
- *RF cable assemblies*
- *Microwave components*
- *Microwave switches*
- *Optical interconnect systems*
- *Multipin connectors*

SPACE EXPERTISE

All of Radiall's space products are designed by space engineers at our state-of-the-art plant in Isle d'Abeau, France. Our 600 m² ISO 7 and ISO 8 clean rooms are among several in-house capabilities that allow us to guarantee that our customers are receiving the highest quality components on the market.



DESIGN


To ensure that customers' specific needs for dedicated applications are met, our engineers use the following tools to design and model components:

- ANSYS
- SolidWorks
- CST Microwave Studio
- COSMOSWorks
- HFSS

TESTS

At Radiall, we understand the importance of products that meet environmental and space specifications. We use the following in-house test equipment to ensure that customers receive high performance and qualified components:

- Vector Network Analyzers
- Thermal chamber with nitrogen injection
- Thermal vacuum chambers
- Automatic test benches for electrical switch parameters
- X-ray equipment
- Multipaction and power handling test benches
- Vibration shakers
- Half sine shock machine
- Reverberation chamber for EMC measurements

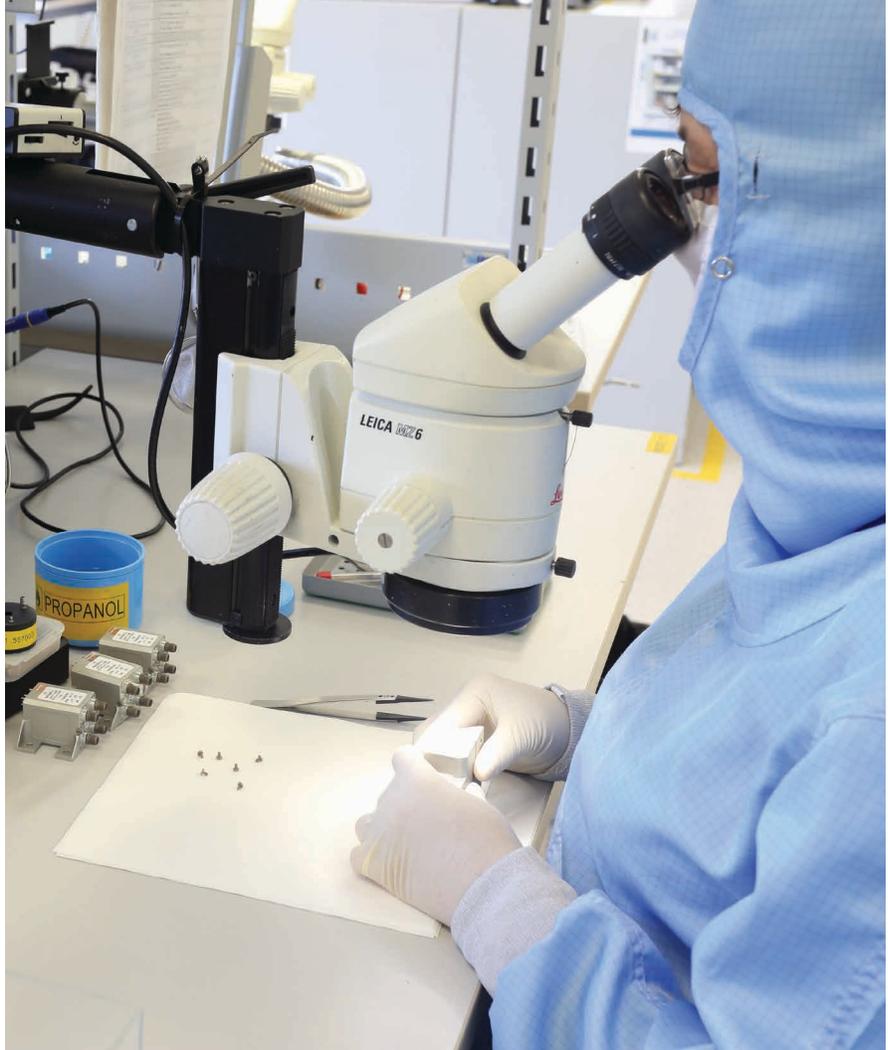

Radiall presence for all space grades:

FM GRADE

Flight Models include products tested for flight acceptance. Radiall products for FM are also space-qualified and are assembled in appropriate conditions with respect to the relevant space standards. Radiall delivers components ready to integrate into Flight Model satellites.

QM OR EQM GRADE

Qualification Models and Engineering Qualification Models are built to full standard in accordance with the requirements imposed on Flight Models. Radiall provides components for QM and EQM with the same requirements as Flight Models.

EM GRADE

Engineering Models are representative of Flight Models in form-fit-function. Lower standards of components, materials and processes may be used with limited screening to performance verifications. Radiall is well-equipped to design, manufacture and deliver products that conform to this requirement.

PFM GRADE

Proto-Flight Models are equivalent to FM and are acceptable for flight use. Radiall products for PFM are submitted to an extended screening test. For example, Radiall switches are tested at the maximum qualified temperature range and vibration level in a vacuum chamber.

HIREL GRADE

For some applications, such as constellations, space-qualified components are not mandatory. However, our standard product range is put through extensive testing to guarantee our products are perfectly adapted to space environments.

TVAC GRADE

Radiall has a wide range of standard products that are compatible with vacuum environments.

GEO SATELLITES

Our connectors, attenuators, switches, couplers and cable assemblies are designed and qualified to withstand the high requirements of GEO satellites. Radiall also provides qualified optical solutions for payload applications to address the need for higher bandwidth and large amounts of data.



RF SWITCHES

Radiall has more than 50 years' experience in designing and manufacturing electromechanical switches. The space-qualified range, SPDT, DPDT, DP3T and T switches, can be fitted with SMA, SMA 2.9, SMPLOCK or TNC interfaces, depending on frequency band and power requirements. We offer individual switches with D-SUB, external pins or flying leads for CMD and TLM controls, as well as interconnected, compact switch matrices, from 2 to 8 switches.

- Excellent RF performances: VSWR and EMC
- Lightweight
- High density switch matrix
- Random or sequential T-switches



RF COUPLERS & DIVIDERS

Our product range has recently been completely redesigned to offer the best RF performances in VSWR, amplitude balance and EMC. We also optimized the design to guarantee glitch-free products.

- 3 dB hybrid power dividers
- Directional couplers, 5 to 30 dB
- Dividers, 2 ways to 8 ways
- From L-band to Ka-band



RF CABLE ASSEMBLIES

Our range of space-qualified, low loss flexible coaxial cable assemblies and semi-rigid cable assemblies is entirely customizable. We offer several cable diameters and various configurations of connectors. Length and shape can also be adapted to equipment.

- Technical support to define the best configuration
- ETFE jacket available for better radiation tolerance
- Compliance with ESCC 3408 specification
- Phase-matched option available



RF CONNECTORS

Radiall's space offering includes a wide range of coaxial connectors with a frequency range up to Q-band. This includes SMA, SMA 2.9 and Very High Power TNC connectors that are ESA qualified, as well as TNC, 2.4 mm and SMP/SMP-LOCK connectors.

- Various interfaces available
- ESA qualification



RF ATTENUATORS & LOADS

Radiall offers space-qualified low power attenuators (up to 2 W) and low or medium power terminations (up to 45 W). These are available with various interfaces: SMA, SMA 2.9, SMP-LOCK, 2.4 mm and TNC.

- ESA qualification
- Attenuators are glitch-free
- Robust design



Q-MTITAN™ SPACE-QUALIFIED OPTICAL LINK

Radiall designs and delivers optical assemblies that are equipped with 12-fiber Q-MTitan™ contacts and HDQX connectors. The full optical links are qualified for use in stringent payload applications.

- Random Vibration: 40 grms up to 2,000 Hz
- Sin Vibration: 20 G up to 100 Hz
- Shocks: 2,000 G
- Temperature Cycling: -55 °C/125 °C
- Temperature Storage: 1,000 h @ 125 °C
- Equipped with radiation-resistant fibers and low outgassing components

LEO CONSTELLATION

The space market is rapidly evolving, and some applications require both high-quality and cost-effective solutions. To satisfy such applications, Radiall's space solutions leverage our global technologies and industrial presence with simplified screening.



SMP-LOCK & SMPM-LOCK CONNECTORS

These interfaces combine SMP electrical performance with an additional locking mechanism that features high retention force. Various types of connectors and adapters are available for LEO constellations: male/female, straight/right angle, with flanges or thread mounts, etc. These interfaces are perfect for LEO programs, which typically require quick and secure connections.

- DC – 40 GHz
- Secured connection
- Saves integration time



RF CONNECTORS FOR BOARD-TO-BOARD APPLICATIONS

SMP interface is the most reliable and common interface for Board-to-Board space applications. We offer a wide range of models: fixed bullet with your exact required length, spring bullet and various receptacles, including a catcher's mitt design.

- Wide range with various configurations
- Different retention forces available



QUARTZ-S SMT RELAY

As part of the SELECTOR consortium, Radiall designed a Miniature Electro-Mechanical Relay (MEMR), a high miniaturization, SMT-compatible, electro-mechanical switch for the space sector.

- Small size
- High frequency: 32 GHz
- Life span: 1 million cycles guaranteed



HIREL RF CABLE ASSEMBLIES

Based on our space-qualified range, Radiall can also offer HIREL RF cable assemblies. We guarantee the same design as the FM cable assemblies but with simplified screening and manufacturing in a low-cost area.

- *Cost-effective solution*



OPTICAL FIBER LINKS

We offer a wide range of configurations for space grade assemblies that are available with high-reliability connectors, cables and optical contacts, including legacy LC connectors, LuxCis® ARINC 801 contacts and space-qualified Q-MTitan™ contacts. They can be assembled on single or multifiber cables or optical flex circuits, and they maintain a high optical link budget.

- *Weight optimized, compact and robust optical interconnect solutions*
- *High volume capability*
- *High optical and environmental performances adapted to LEO environment*



QUICK INSTALL RADIALL CONNECTOR

The Quick Install connector is a revolutionary tool-less interconnect solution. It features a locking system to ensure instant manual mating and a slide lock with visual indicators to guarantee that the mating is secure.

- *Instant assembly: one-finger mating technology*
- *QR equipment for straight and right angle PC tail contacts*
- *High density and ultra-light connector*

GROUND TESTING

Ground testing components and systems is an essential stage in the satellite manufacturing process. It includes testing space equipment, payloads and satellites under simulated flight conditions. To optimize the cost of developing and testing space systems, Radiall offers product alternatives depending on the types of components used.



TVAC RF SWITCHES

With more than 25 years of experience in the space industry, Radiall has developed a product offering that emphasizes reliability and performance and operates in thermal vacuum testing environments. Designed in accordance with our standard RAMSES product offering, TVac series switches feature identical configurations with excellent performance.

- SPDT, DPDT, SPnT
- Terminated and terminated models
- Long life span: up to 10 million cycles



TESTPRO RF CABLE ASSEMBLIES

TVac test assemblies offer excellent electrical performance and high mechanical endurance. Additionally, these ruggedized assemblies offer reliability and durability when it matters most. Despite high protection resistance, Radiall's range of TVac TestPro solutions remain exceptionally flexible and user-friendly with an extended life of more than 20,000 flex cycles.

- DC – 67 GHz
- Phase and amplitude stability
- High flexibility and reliability



RF CABLE ASSEMBLIES & CONNECTORS

Radiall designed a wide range of coaxial connectors and cable assemblies for space testing with various interfaces, configurations and types of cable. For ground applications, Radiall offers cable assemblies and connectors based on our commercial range. If required, Radiall can offer a complete set of phase-matched, time delay-matched or amplitude-matched SHF cable assemblies.

- Low loss (SHF range), flexible and robust cables
- Customized offer depending on the application
- EM cable assemblies are also available for equipment qualification
- Quick lock solution connection



MICROWAVE COMPONENTS

Radiall develops and manufactures a wide range of coaxial microwave components, including terminations, attenuators, couplers, power dividers, filters and other specialized components.

- Frequency range: DC – 67 GHz
- Power range: 0 to 1,000 W
- Robust design
- Excellent electrical performance
- Impedance: 50 Ohms



OPTICAL FIBER LINKS

The wide range of ruggedized and reliable interconnect solutions available at Radiall makes it possible to design and build assemblies with optimized fiber management solutions. Our optical contacts and connectors can be assembled on single or multifiber cables or optical flex circuits.

- High reliability connectors, cables and optical contacts: LuxCis® ARINC 801, LC, C-MTitan™ and Q-MTitan™ ARINC 846
- High optical link budget
- EMI/EMC compliance
- High level of shock and vibration compliance
- -55/+125 °C operational temperature range



OPTOELECTRONIC CONVERTERS

Radiall offers a complete range of high performance optoelectronic Active Optics by DLightsys® for harsh environments: DO-160, MIL-STD, ARINC 804.

- Lowest power consumption (<50 mW/ch Gbps)
- Smallest form factor for single channel and multichannel modules (6.5 mm²/ch/Gbps)
- Protocol-independent and large bandwidth per channel (from DC to 10 Gbps)
- Various packages and form factors available (LCC, Socketed, SFF, others)
- Free space version for Board-to-Board contactless data links

LAUNCHERS

Vehicle launch systems require products that can withstand harsh environments due to the high levels of shock and vibration they experience. Our innovative range of products enables satellites to make safe connections in space orbits.



RF CABLE ASSEMBLIES

Various robust configurations with high resistance to mechanical shocks and vibrations are available. Our cable assemblies for launching applications are qualified to guarantee a secure connection during the launching process. We also offer a wide range of FM designed with venting holes for outgassing and to avoid Corona breakdown.

- Random vibration up to 40 Grms
- Mechanical shock half sine 1,000 Grms
- Various diameters available
- Vacuum compatible option
- Specific screening and qualifications can be applied



RF CONNECTORS

Compliant with the highest MIL standards, Radiall designs coaxial connectors that withstand high vibrations and shock levels.

- Frequency up to 65 GHz
- Secured coupling mechanism available
- High corrosion resistance
- Temperature range up to 200 °C



EPXB2 LIGHTWEIGHT DISCONNECT

With the increasing demand for weight-saving connection solutions, Radiall now offers an alternative EPXB2 with J plating and 21% weight savings compared to the standard EPXB2 aluminium connector.

- Modular and user-friendly connector: fully intermateable
- Space-saving solution
- Cost-saving solution
- EN 4644 European standard



RF COUPLERS & DIVIDERS

For over 30 years, Radiall has designed coaxial couplers and power dividers/combiners for embedded RF systems. Our product offering includes directional and 3 dB 90° hybrid couplers, as well as power dividers used for signal measurement. Both products comply with MIL-STD-202G.

- Couplers operating from 0.15 to 18 GHz
- 3, 6, 10, 20, 30 dB standard coupling values
- Low insertion loss and VSWR
- High directivity
- Dividers operating from 0.22 to 26.5 GHz
- 2, 3, 4, 6 and 8 way divisions available
- Power dividers can be used as combiners



Q-MTITAN™ SPACE-QUALIFIED CONTACT

Q-MTitan™ is an optical contact designed and qualified for high density, high data rate applications in space environments. It can be used in existing size 8 Quadrax cavities of off-the-shelf multipin connectors that are available in the defense and aerospace markets, such as MIL-DTL-38999, QuickFusio™, NSX ARINC 600, EPX EN4644 and HDQX. Compatible with ribbon and round cable and radiation-resistant fibers, it offers excellent performances.

- 500 mating cycles
- Vibration 41.7 Grms
- Shocks 2,000 G
- -55/+125 °C



OPTICAL FIBER LINKS

We offer high-quality harnesses and complex optical systems, including D-Lightsys® active devices, multipin connectors and ruggedized fiber optic interconnect solutions: LuxCis® ARINC 801, LC, C-MTitan™ and Q-MTitan™ ARINC 846.

- Lightweight and small design
- Material with low outgassing
- Immunity to EMI and RFI
- Resistance to radiation
- Simplex and multichannel assemblies



*Compliant with European
export control regulations
and United States ITAR.*



SIMPLIFICATION is our INNOVATION

We advance the design and engineering process for innovators, groundbreakers and pioneers of technology. We reduce weight, improve durability and streamline installation to provide leading-edge connectors that drive product performance.

AREA OFFICES LOCAL CONTACTS

EUROPE

ADDRESS	PHONE	FAX	EMAIL
FINLAND Radiall Finland PO Box 202, 90101, Oulu	+358407522412		infofi@radiall.com
FRANCE Radiall SA 25 Rue Madeleine Vionnet, 93300, Aubervilliers	+33149353535		info@radiall.com
GERMANY Radiall GmbH Carl-Zeiss-Straße 10, 63322, Rödermark	+49607491070	+496074910710	infode@radiall.com
ITALY Radiall Elettronica S.R.L. Via Zambelletti 19, 20021, Baranzate Milano	+39024885121	+390248843018	infoit@radiall.com
NETHERLANDS Radiall Nederland BV Hogebrinkerweg 15b, 3871, KM Hoevelaken	+31332534009	+31332534512	infonl@radiall.com
SWEDEN Radiall AB Sollentunavägen 63, 191 40 Sollentuna	+4684443410		infose@radiall.com
UNITED KINGDOM Radiall Ltd. Profile West, 950 Great West Rd., Brentford, Middlesex TW8 9ES	+441895425000	+441895425010	infouk@radiall.com

ASIA

CHINA Shanghai Radiall Electronics Co., Ltd. No.688 Hui Fang Road, Shanghai, China, 201806	+862166523788	+862166521177	infozh@radiall.com
HONG KONG Radiall Electronics (Asia) Ltd. Room A, 16/F., Ford Glory Plaza, 37-39 Wing Hong Street, Cheung Sha Wan, Kowloon, Hong Kong	+85229593833	+85229592636	infohk@radiall.com
INDIA Radiall India Pvt. Ltd. 25D, Phase 2, Peenya Industrial Area, Bengaluru 560 058	+918028395271	+918028397228	infoin@radiall.com
JAPAN Nihon Radiall K.K. Sawada Building 8F, Shibuya-ku, Tokyo 150-0011	+81364274455	+81364274456	infojp@radiall.com

AMERICAS

USA & CANADA Radiall USA, Inc. 8950 South 52nd Street, Ste. 401 Tempe, AZ 85284	+14806829400	+14806829403	infousa@radiall.com
--	--------------	--------------	---------------------

GLOBAL PRESENCE

*Australia · Austria · Belgium · Brazil · Czech Republic · Denmark · Estonia · Greece · Hungary · Indonesia · Israel · Korea · Latvia · Lithuania
Malaysia · Norway · Philippines · Poland · Portugal · Singapore · South Africa · Spain · Switzerland · Taiwan · Thailand · Turkey · Vietnam*