


| | | | |
|----------|--------------------|--------------------|-------------------------------|
| PAGE 1/2 | ISSUE 28-10-24A | SERIES SPLITTER | PART NUMBER R434513002 |
|----------|--------------------|--------------------|-------------------------------|



All dimensions are in mm. Tolerances according to ISO 2768 c-K

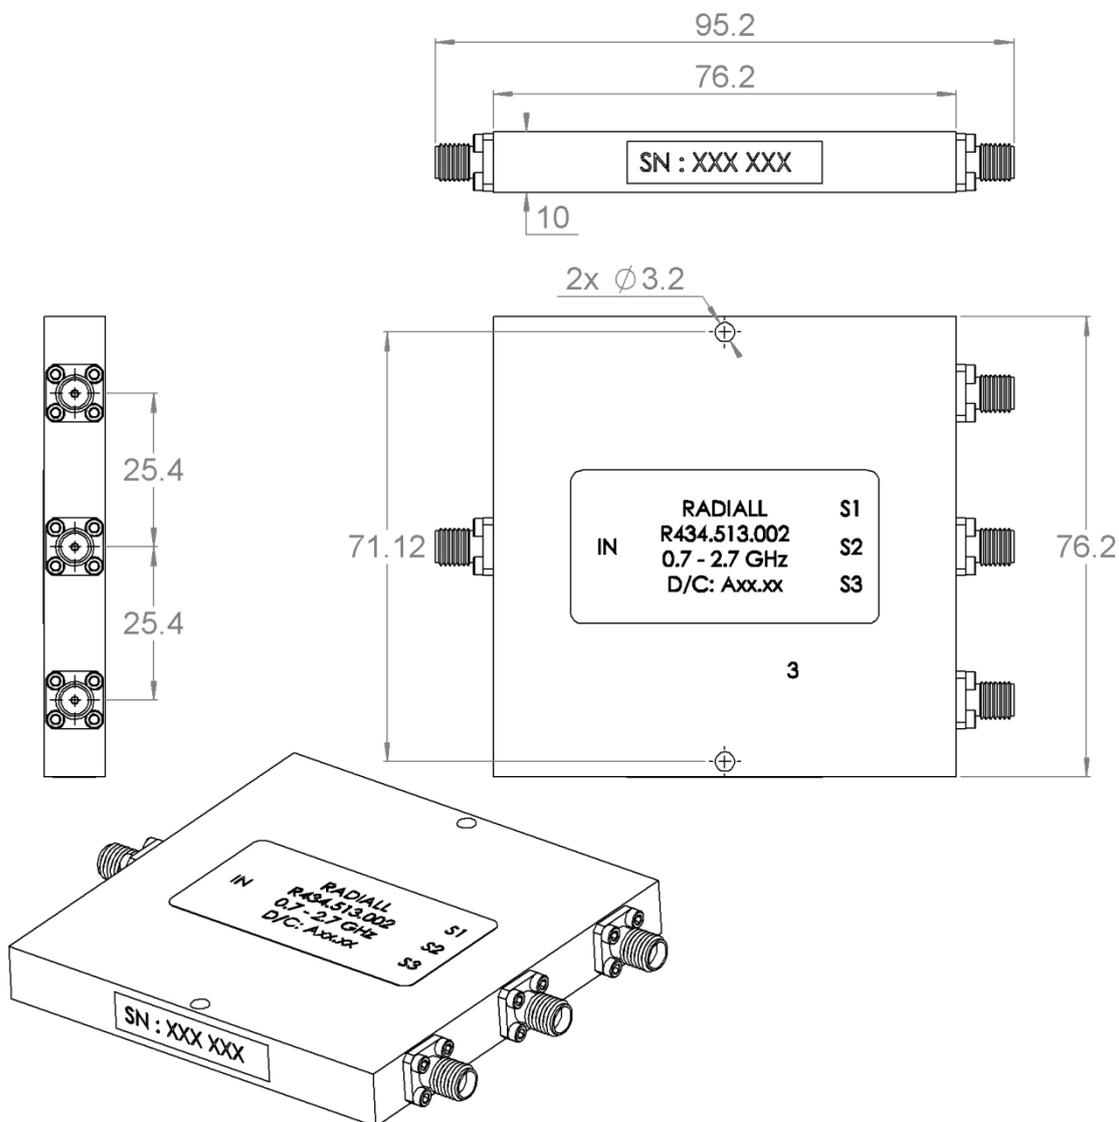

Weight (±15%) **159,8000 g**
Specification

| | | | |
|----------|---------------------------|---------------------------|-------------------------------|
| PAGE 2/2 | ISSUE 28-10-24A | SERIES SPLITTER | PART NUMBER R434513002 |
|----------|---------------------------|---------------------------|-------------------------------|

ELECTICAL CHARACTERISTICS

| | |
|-------------------|---------------|
| Frequency range : | 0.7 – 2.7 GHz |
| Number of ways | 3 |
| Phase | 0° |
| VSWR | |
| Input | 1.5 |
| Output | 1.5 |
| Impedance | 50 Ohms |
| Insertion loss | 0.6 dB max |
| Isolation | 17 dB mini |
| Amplitude balance | ± 0.5 dB |
| Phase Balance | ± 8° |
| Average Power | |
| VSWR load < 1.2 | 30W |
| VSWR load : inf | 1W |

MECHANICAL CHARACTERISTICS

| | |
|--------------|------------|
| Connectors : | |
| Input | SMA female |
| Output | SMA female |
| Body | Aluminium |
| Finish | Blue Paint |

ENVIRONMENTAL CHARACTERISTICS

| | |
|-----------------------|---------------|
| Operating temperature | -40 / +85 °C |
| Storage temperature | -55 / +125 °C |