


PAGE 1/2

ISSUE **26-03-20B**

SERIES  
**SPLITTER**

PART NUMBER **R434618002**

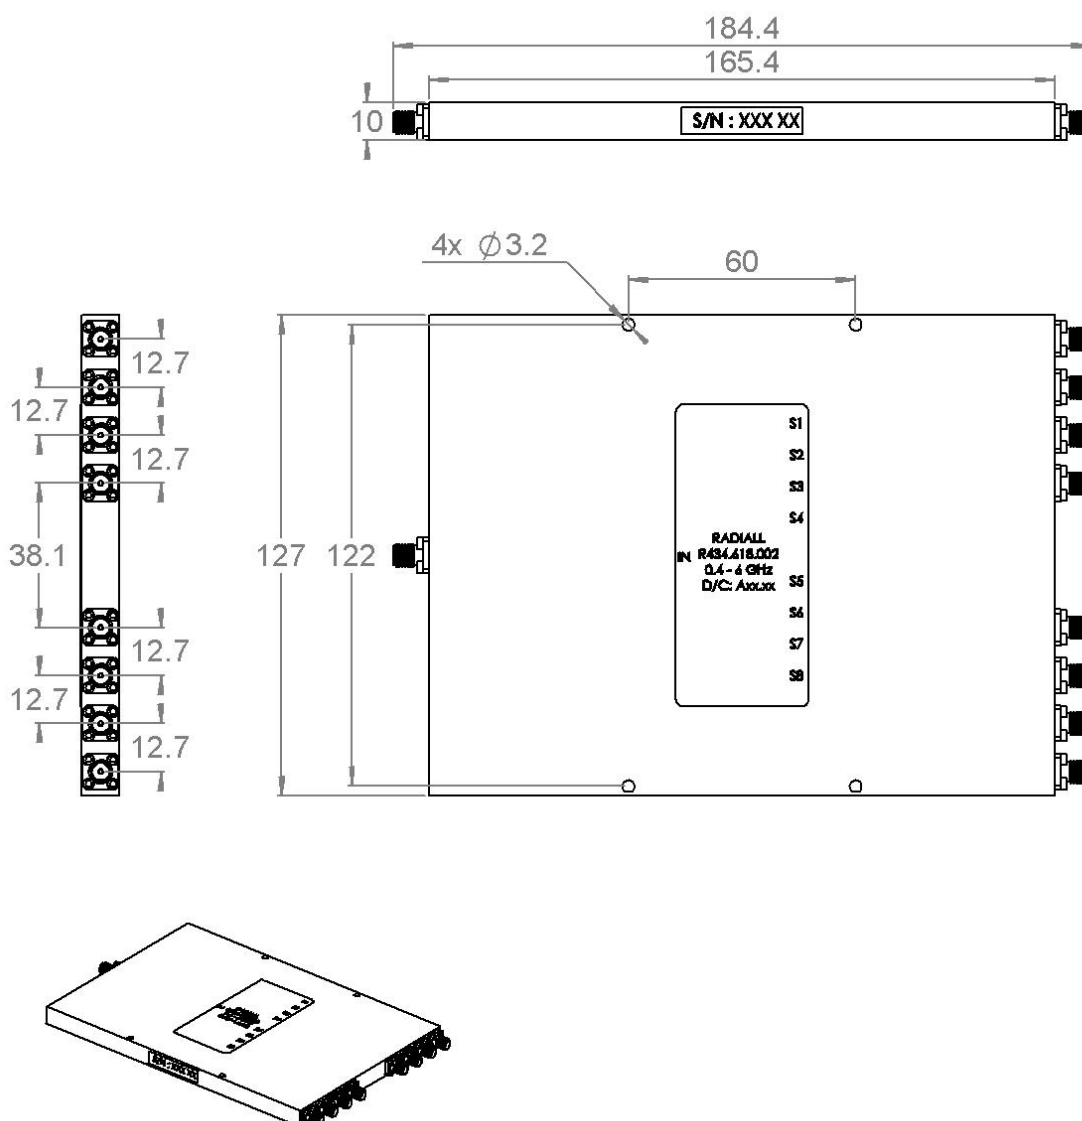

All dimensions are in mm. Tolerances according ISO 2768 m-K

Weight **585,0000** g  
Specification



PAGE 2/2

 ISSUE **26-03-20B**

 SERIES  
**SPLITTER**

 PART NUMBER **R434618002**

## ELECTICAL CHARACTERISTICS

Frequency range :	0.4 - 6 GHz
Number of ways	8
Phase	0°
VSWR	
Input	1.8
Output	1.8
Impedance	50 Ohms
Insertion loss	2 dB max
Isolation	16 dB mini
Amplitude balance	± 0.5 dB
Phase Balance	± 6°
Average Power	
VSWR load < 1.2	30W
VSWR load : inf	1W

## MECHANICAL CHARACTERISTICS

Connectors :	
Input	SMA female
Output	SMA female
Body	Aluminium
Finish	Blue Paint

## ENVIRONMENTAL CHARACTERISTICS

Operating temperature	-40 / +85 °C
Storage temperature	-55 / +125 °C