

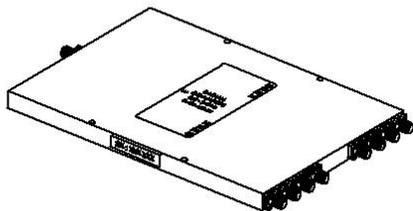


PAGE 1/2	ISSUE 30-03-20B	SERIES SPLITER	PART NUMBER R434618003
----------	-----------------	--------------------------	-------------------------------

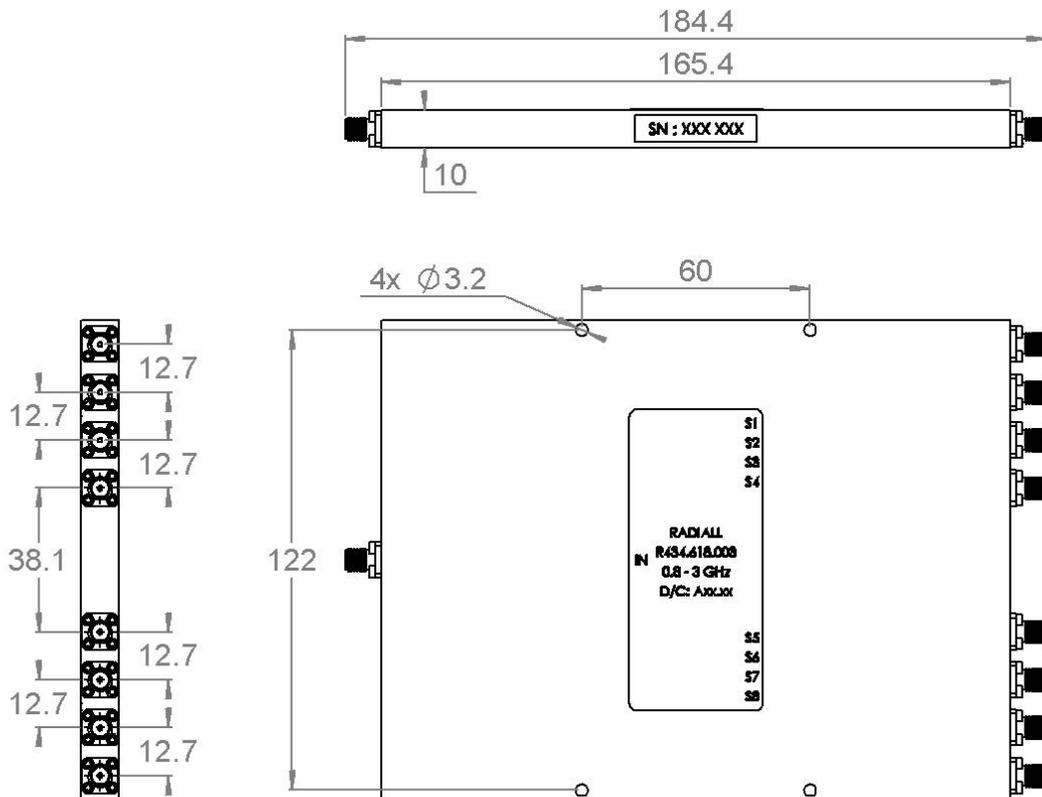

All dimensions are in mm. Tolerances according ISO 2768 m-K

Weight **585,0000** g
Specification



PAGE 2/2	ISSUE 30-03-20B	SERIES SPLITER	PART NUMBER R434618003
----------	------------------------	--------------------------	-------------------------------

ELECTICAL CHARACTERISTICS

Frequency range :	0.8 – 3 GHz
Number of ways	8
Phase	0°
VSWR	
Input	1.6
Output	1.6
Impedance	50 Ohms
Insertion loss	1.3 dB max
Isolation	20 dB mini
Amplitude balance	± 0.5 dB
Phase Balance	± 6°
Average Power	
VSWR load < 1.2	30W
VSWR load : inf	1W

MECHANICAL CHARACTERISTICS

Connectors :	
Input	SMA female
Output	SMA female
Body	Aluminium
Finish	Blue Paint

ENVIRONMENTAL CHARACTERISTICS

Operating temperature	-40 / +85 °C
Storage temperature	-55 / +125 °C