

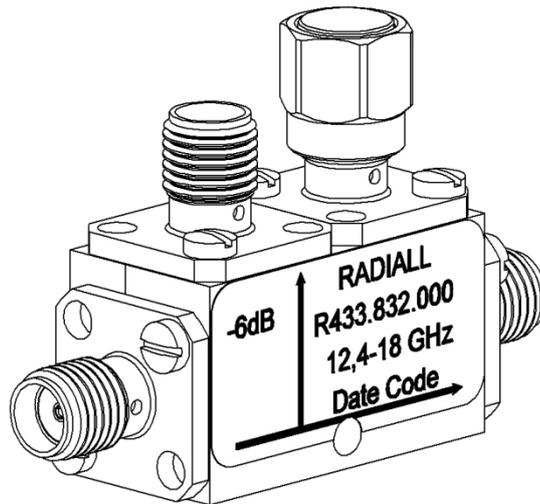


PAGE 1/2	ISSUE 25-04-24A	SERIES COUPLER	PART NUMBER R433832000
----------	--------------------	-------------------	-------------------------------

Scale 2 : 1

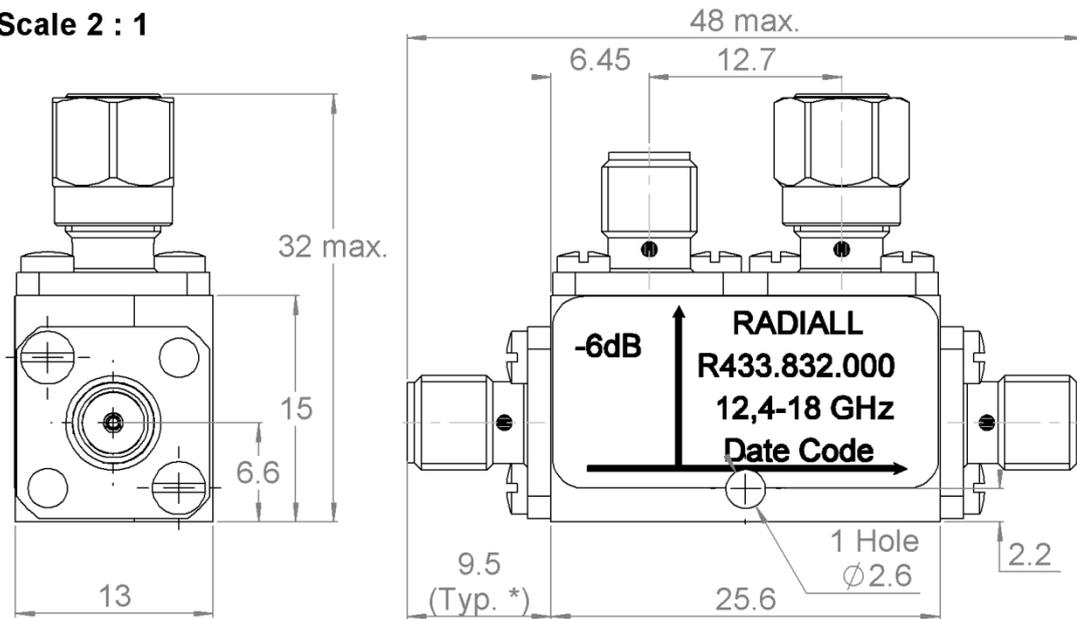

All dimensions are in mm. Tolerances according ISO 2768 c-K



Weight (±15%) **26,5900 g**
Specification

PAGE 2/2

 ISSUE
25-04-24A

 SERIES
COUPLER

 PART NUMBER **R433832000**

ELECTRICAL CHARACTERISTICS

Frequency operating range :	12.4 – 18 GHz
Impedance :	50 Ω
VSWR : - Main Line	1.40 max.
- Coupled Line	1.40 max.
Nominal Coupling :	6 dB
Coupling Precision :	± 1 dB
Directivity :	15 dB mini
Insertion loss :	2.2 dB max.
Frequency Sensitivity :	± 0.5 dB max.
Average Power at 25°C	50W
Peak Power at 25°C	3000W

MECHANICAL CHARACTERISTICS

Connector type :	SMA female per MIL-C 39012
Coaxial Termination :	SMA, 50 Ω , 1W

ENVIRONMENTAL CHARACTERISTICS

Operating temperature :	-40°C / +100°C
Storage temperature :	-40°C / +100°C