



PAGE 1/2	ISSUE 25-04-24A	SERIES COUPLER	PART NUMBER <b>R433833700</b>
----------	--------------------	-------------------	-------------------------------

**Scale 2 : 1**

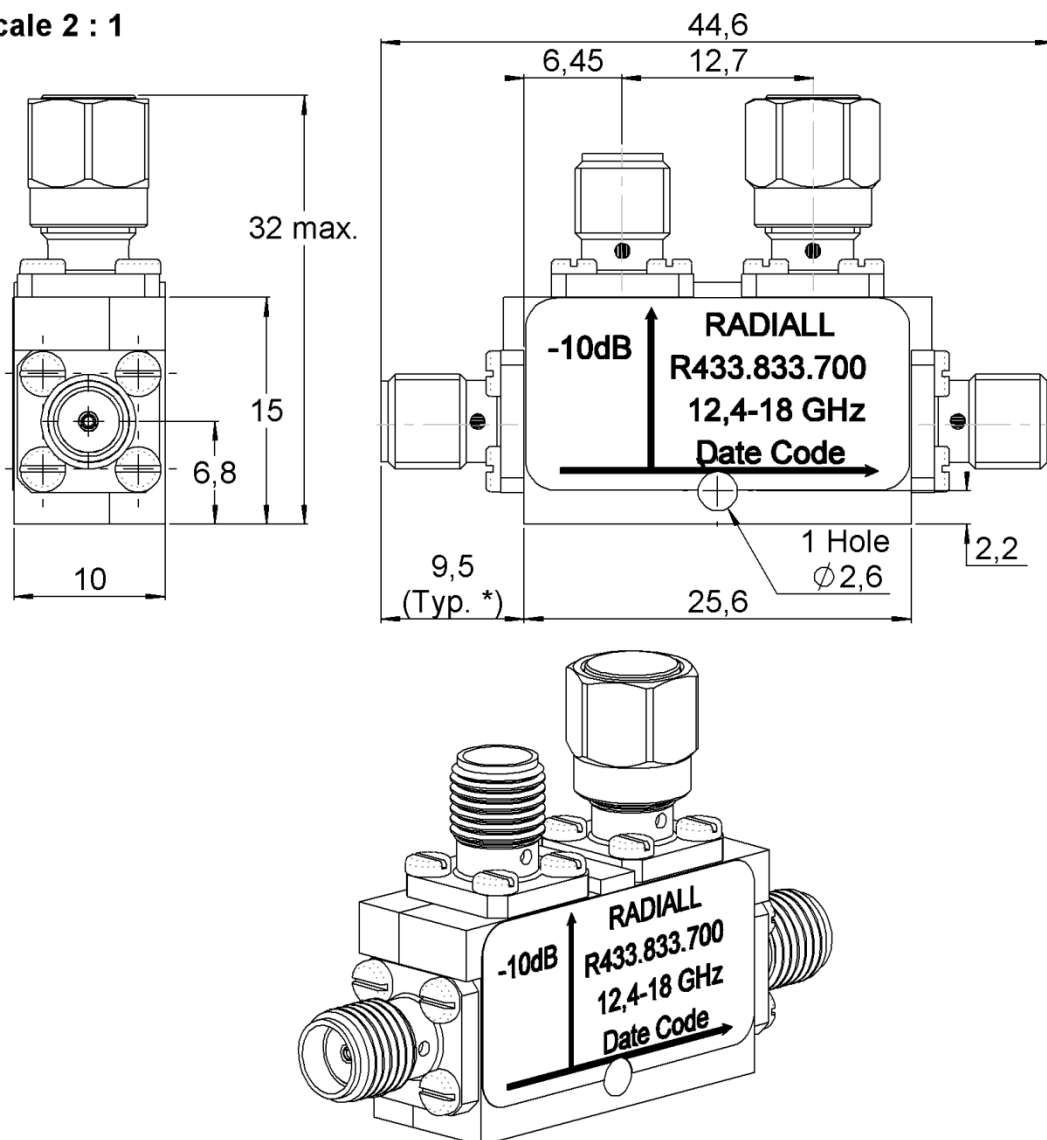

All dimensions are in mm. Tolerances according ISO 2768 c-K

Weight ( $\pm 15\%$ ) **15,6800 g**  
Specification



PAGE 2/2

ISSUE  
25-04-24A

SERIES  
COUPLER

PART NUMBER **R433833700**

## **ELECTRICAL CHARACTERISTICS**

Frequency operating range :	12.4 – 18 GHz
Impedance :	50 $\Omega$
VSWR : - Main Line	1.35 max.
- Coupled Line	1.35 max.
Nominal Coupling :	10 dB
Coupling Precision :	$\pm 1$ dB
Directivity :	15 dB mini
Insertion loss :	1.1 dB max.
Frequency Sensitivity :	$\pm 0.5$ dB
Average Power at 25°C	50W
Peak Power at 25°C	3000W

## **MECHANICAL CHARACTERISTICS**

Connector type :	SMA female per MIL-C 39012
Coaxial Termination :	SMA, 50 $\Omega$ , 1W

## **ENVIRONMENTAL CHARACTERISTICS**

Operating temperature :	-40°C / +100°C
Storage temperature :	-40°C / +100°C