

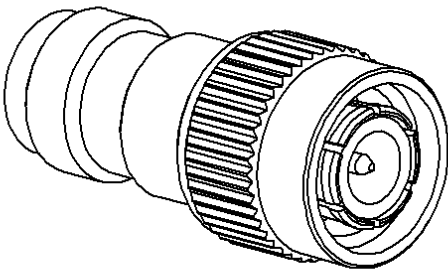


PAGE 1/2	ISSUE 22-04-24A	SERIES DC BLOCK	PART NUMBER R443151000
----------	--------------------	--------------------	-------------------------------

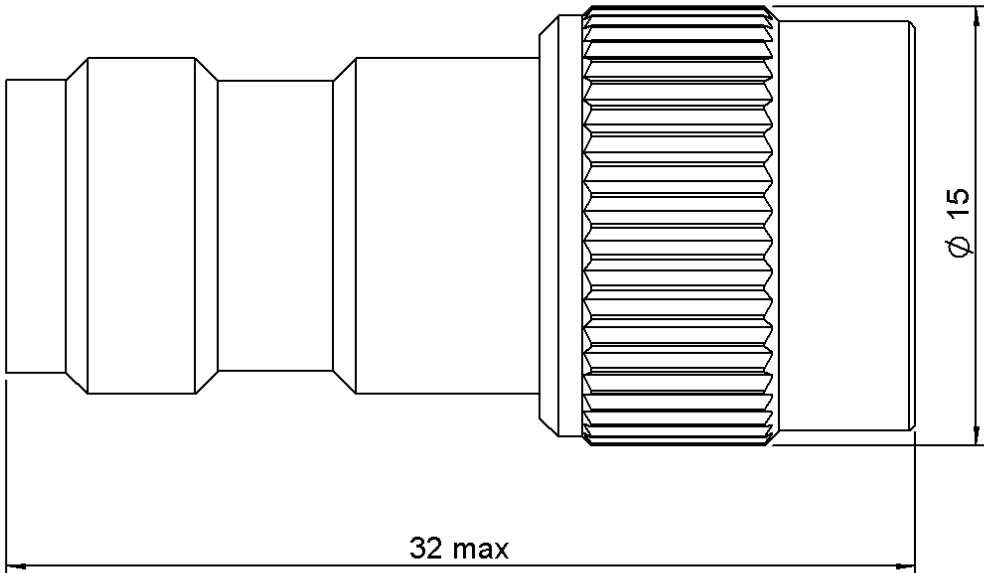

All dimensions are in mm. Tolerances according ISO 2768 c-K



Weight (±15%) **16,7700 g**
Specification

COMPONENTS	MATERIALS	PLATING (µm)
Body	BRASS	NICKEL 2
Male center contact	BRASS	GOLD 0.5 OVER NICKEL 2
Female center contact	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2
Outer contact		
Insulator	PTFE	
Gasket	SILICONE RUBBER	
Substrate		
Resistor		
Others parts		

PAGE 2/2	ISSUE 22-04-24A	SERIES DC BLOCK	PART NUMBER R443151000
----------	---------------------------	---------------------------	-------------------------------

ELECTRICAL CHARACTERISTICS

Frequency (GHz)	0.01 - 3	3 - 6
V.S.W.R (\leq)	1.20	1.40
Deviation(\pm dB)	0.30	0.60


Operating Frequency Range	0.01 - 6	GHz
Impedance	50	Ω
Main line voltage	60	V
Typical capacitance	4700	pF
Average power at 25°C	10	W (Free Air Cooled)
		W (Conduction Cooled)

MECHANICAL CHARACTERISTICS

Connectors	TNC	Male Female	MIL C39012
------------	------------	--------------------	-------------------

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range	-40/+85 °C
Storage temperature range	-40/+85 °C

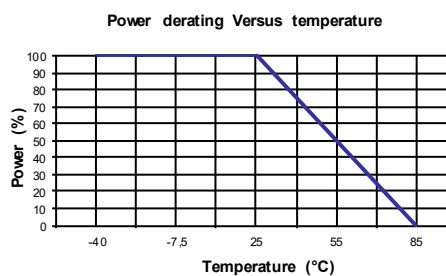

SPECIFICATION

OTHER CHARACTERISTICS