



PAGE 1/2	ISSUE 22-04-24A	SERIES MONITOR TEE	PART NUMBER R443533480
----------	---------------------------	------------------------------	-------------------------------


Scale 3 : 1

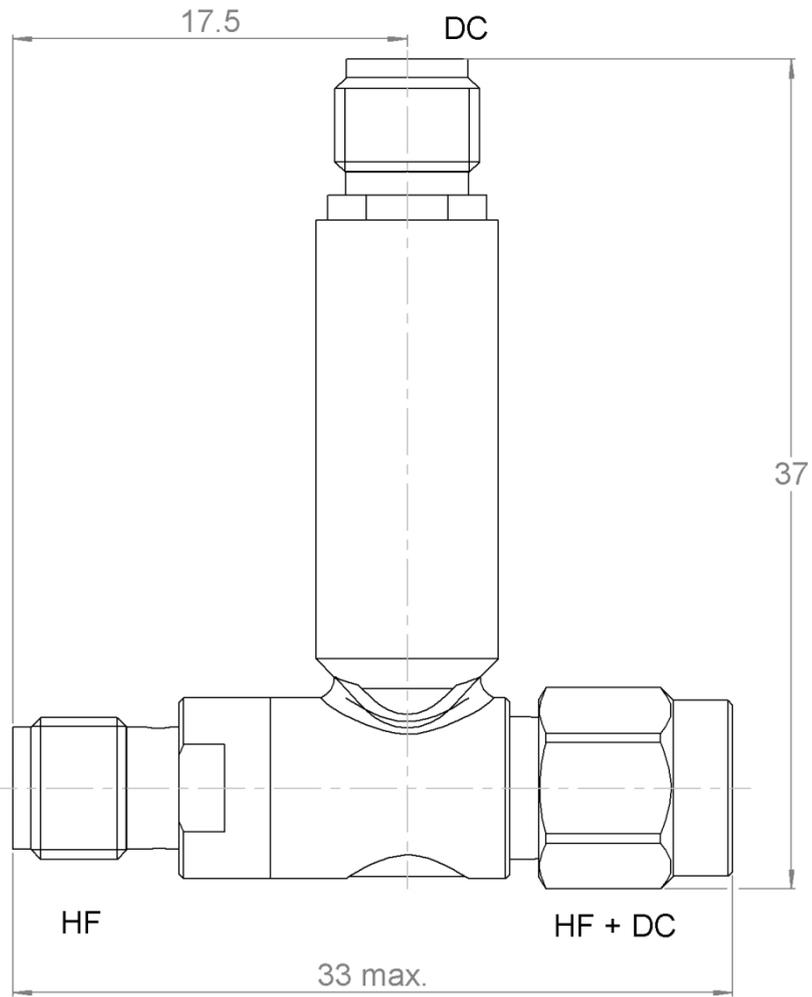

Scale 1 : 1

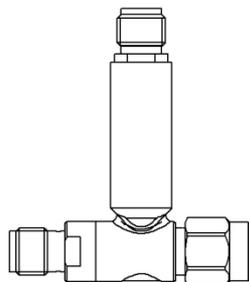

All dimensions are in mm. Tolerances according ISO 2768 c-K



Weight ($\pm 15\%$) **14,5000 g**
Specification

PAGE 2/2	ISSUE 22-04-24A	SERIES MONITOR TEE	PART NUMBER R443533480
----------	---------------------------	------------------------------	-------------------------------

ELECTRICAL CHARACTERISTICS

Frequency (GHz)	0.9 - 3
V.S.W.R (\leq)	1.25
Insertion Loss (\leq dB)	0.25
Rejection Attenuation (dB)	40


Operating Frequency Range	0.9 – 3	GHz
Impedance	50	Ω
DC Resistance of Inductance	0.15	Ω
Maximum DC Current	250	mA
Maximum DC Voltage	50	V
Typical capacitance	10	pF
Average power at 25°C	10	W (Free Air Cooled)
		W (Conduction Cooled)

MECHANICAL CHARACTERISTICS

Connectors	SMA	Male Female	MIL-C 39012
------------	------------	--------------------	--------------------

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range	-5/+65 °C
Storage temperature range	-5/+65 °C

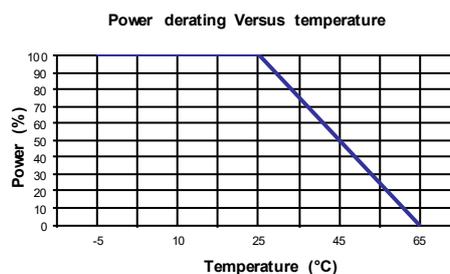

SPECIFICATION

OTHER CHARACTERISTICS