



PAGE 1/2	ISSUE 28-01-19A	SERIES OCTIS	PART NUMBER OCTI090503
----------	-----------------	--------------	------------------------

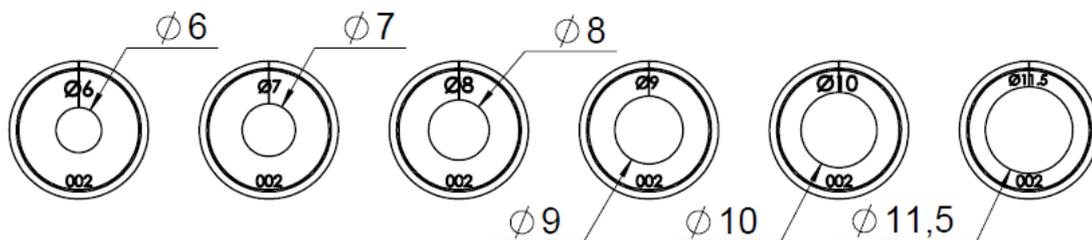

inner diameters are given for reference only

Packing configuration

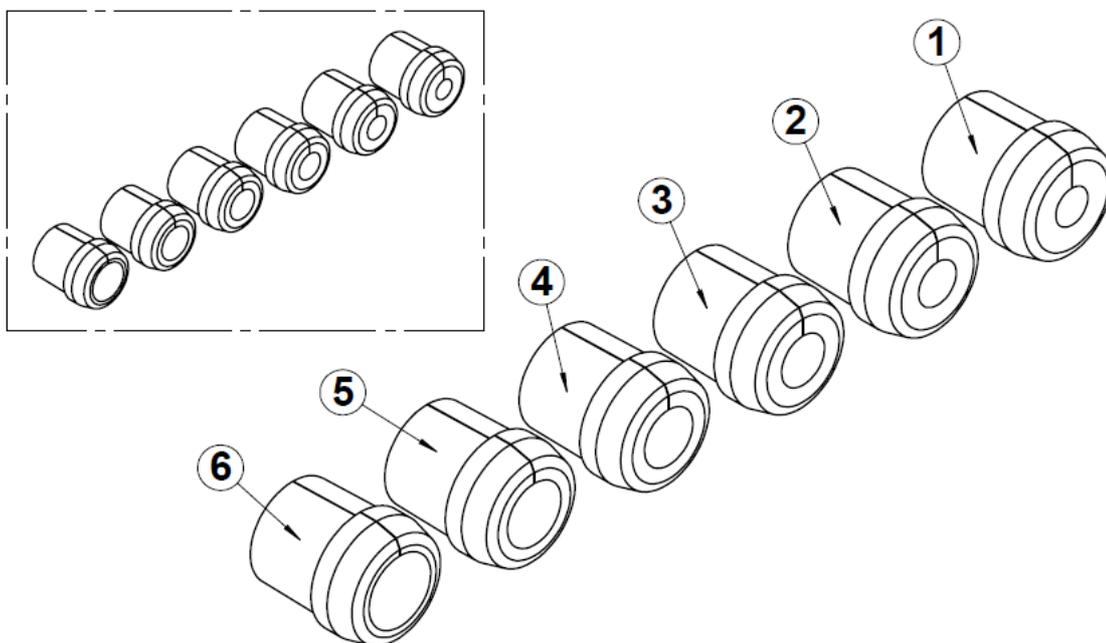

All dimensions are in mm. Tolerances according ISO 2768 m-H

DESCRIPTION

REP	COMPONENT	MATERIALS	PLATING
1	Rubber gland Ø8	SILICONE	-
2	Rubber gland Ø9	SILICONE	-
3	Rubber gland Ø10	SILICONE	-
4	Rubber gland Ø11.5	SILICONE	-


PAGE 2/2	ISSUE 28-01-19A	SERIES OCTIS	PART NUMBER OCTI090503
----------	-----------------	--------------	-------------------------------

GENERAL CHARACTERISTICS

Mechanical Weight (g)		16.3800
Environmental Storage temperature (°C) RoHS	IEC 61300-2-22 -	-65 / +85 Compliant
Others: Use	-	This part must be used with the complete connector Manipulate with gloves
Packaging	-	Bulk

RUBBER GLAND SELECTION CHART

ΦD*	Recommended gland size
From 4.8 min to 5.8 Max	"6"
From 5.8 min to 6.8 Max	"7"
From 6.8 min to 7.8 Max	"8"
From 7.8 min to 8.8 Max	"9"
From 8.8 min to 9.8 Max	"10"
From 10.3 min to 11.3 Max	"11.5"

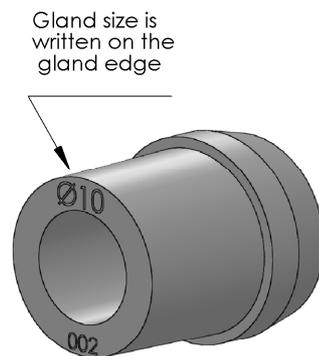

*Cable diameter under the gland. If the cable has a sleeve, the diameter over the sleeve should be considered
The tolerances of ΦD should be taken into account to make sure it is always within the specified range