
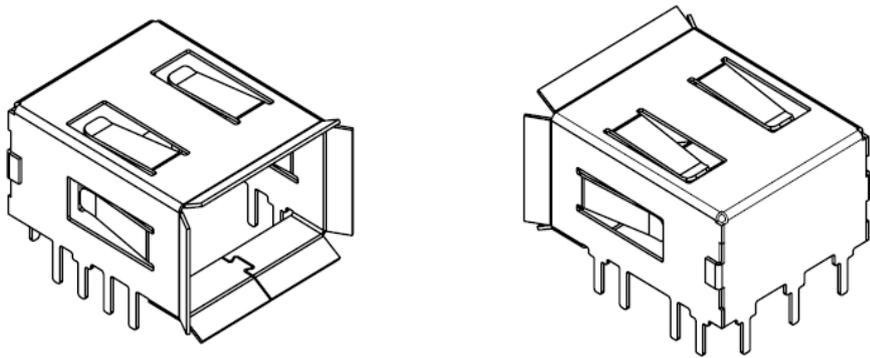


PAGE 1/6	ISSUE 11-01-19B	SERIES OCTIS	PART NUMBER OCT1140505
----------	-----------------	--------------	------------------------

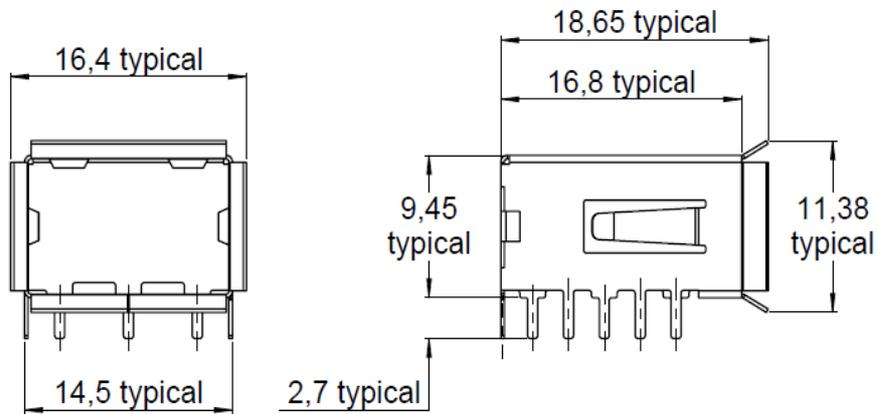

All dimensions are in mm. Tolerances according ISO 2768 m-H.

DESCRIPTION

REP	COMPONENT	MATERIALS	PLATING
1	SFP Shielding cage	BRASS	NiSn


PAGE 2/6	ISSUE 11-01-19B	SERIES OCTIS	PART NUMBER OCT1140505
----------	-----------------	--------------	------------------------

GENERAL CHARACTERISTICS



Mechanical Mating endurance (cycles) Vibration Weight (g)	IEC 61300-2-2 IEC 61300-2-1	100 - 1,6530
Environmental Operating temperature (°C) Storage temperature (°C) RoHS	IEC 61300-2-22 IEC 61300-2-26 -	-40 / +85 -65 / +85 Compliant
Others Packaging Handling	- -	Tape & Reel Only with gloves

PAGE 3/6	ISSUE 11-01-19B	SERIES OCTIS	PART NUMBER OCT1140505
----------	-----------------	--------------	------------------------

PACKAGING

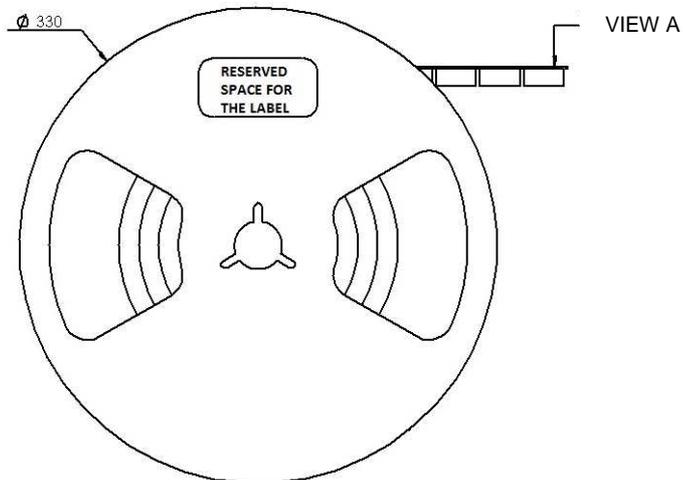

TAPE FEED DIRECTION

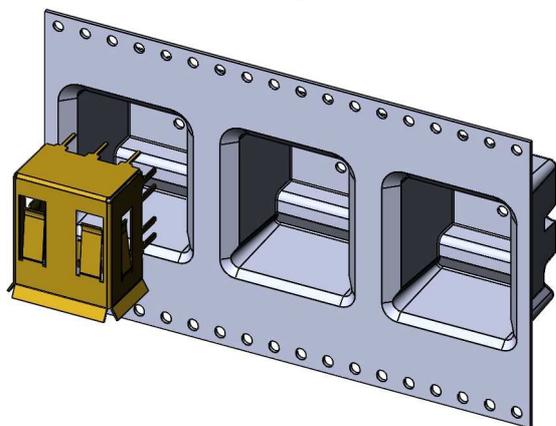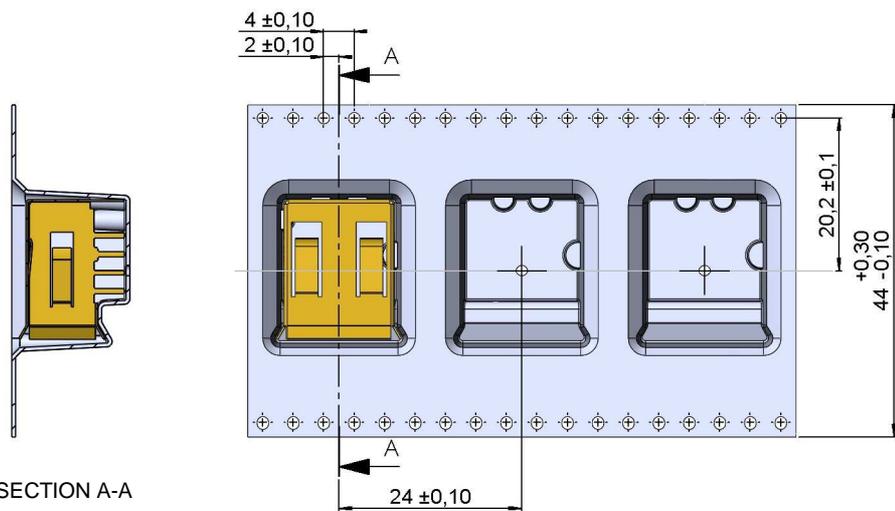


Reel diameter: Ø330
Number of component per reel: 120
Box Dimensions: 330 x 330 x 114 (CB01 Box)
Total Weight: 600 gr

PAGE 4/6	ISSUE 11-01-19B	SERIES OCTIS	PART NUMBER OCTI140505
----------	-----------------	--------------	------------------------

POSITIONNING AND PATTERN DEFINITION


OCTIS SFP Version with universal receptacle

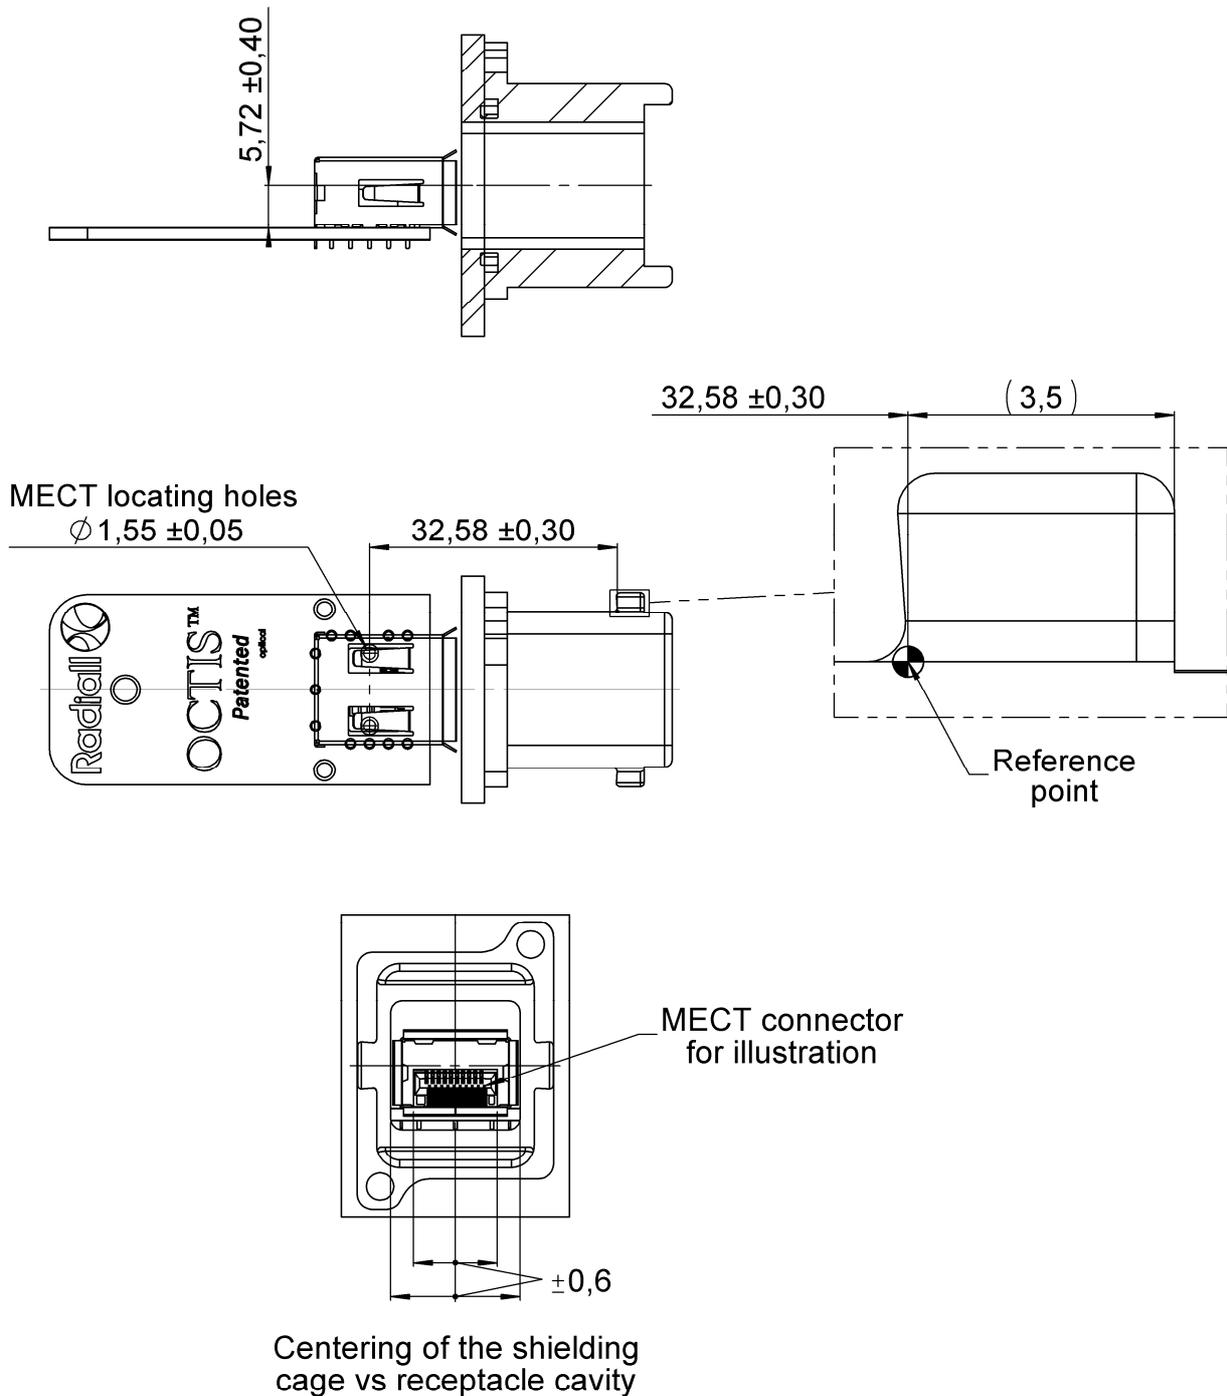


For use with OCTIS Plug Kit p/n OCTI.117.500

PAGE 5/6	ISSUE 11-01-19B	SERIES OCTIS	PART NUMBER OCT1140505
----------	-----------------	--------------	------------------------

FOOT/PRINT
(General Tolerances for PCB +/- 0.1 mm)

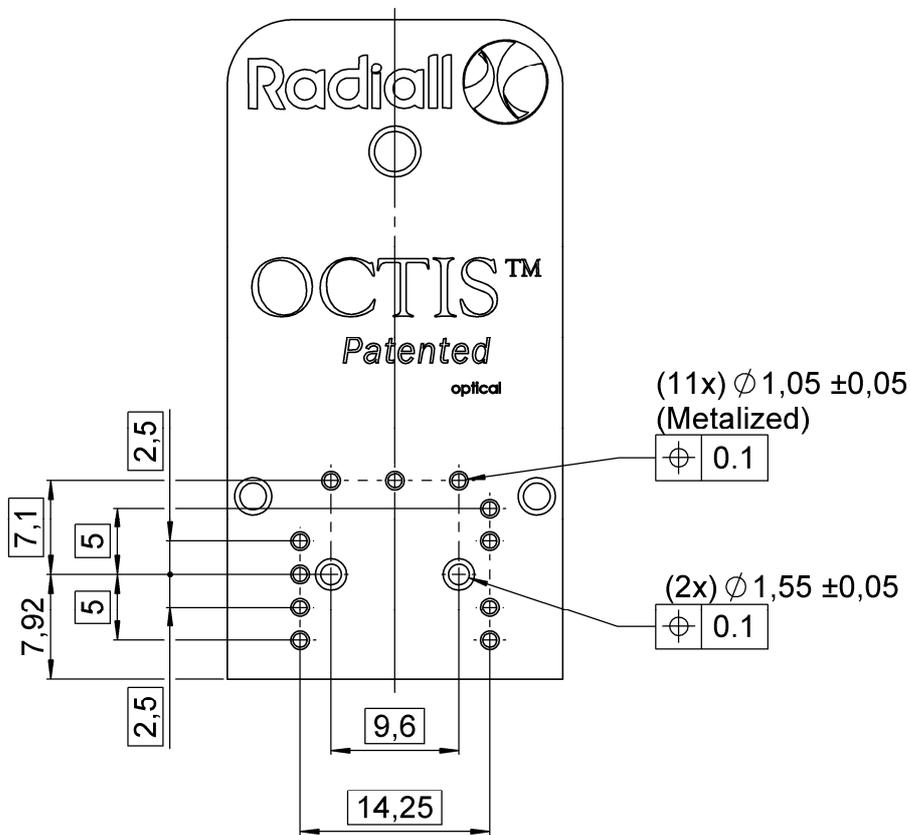

SUITABLE AREA FOR PICK & PLACE VACUUM NOZZLE

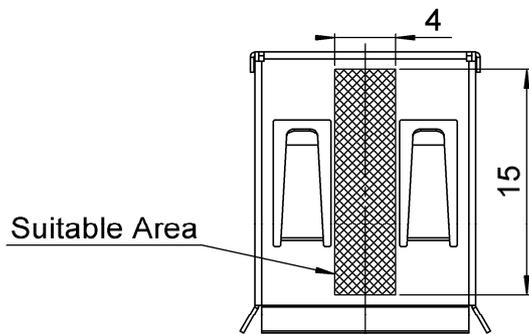


PAGE 6/6	ISSUE 11-01-19B	SERIES OCTIS	PART NUMBER OCT1140505
----------	-----------------	--------------	------------------------

SOLDER PROCEDURE*

1. Deposit solder paste (Sn Ag4 Cu0.5) on solder pads / mounting area by screen printing application. We recommend a low residue flux. Verify that the edges of the pads are clean.
2. Place the component on the mounting area with a pick & place machine. A video camera is recommended for a good positioning of the component. Adhesive agents must not be used on the component.
3. This process of soldering has been tested with a convection oven. Below please find the typical soldering profile to use.
4. Optional cleaning of printed circuit board.
5. Check solder joints and position of the component by visual inspection.

Note: When soldering a receptacle, no plug should be mated to the receptacle before completion of this procedure.

TEMPERATURE PROFILE

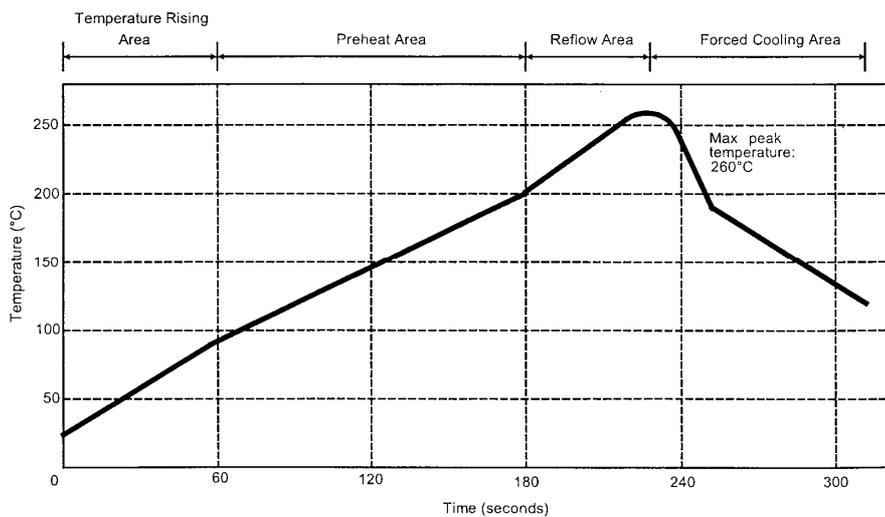

Parameter	Value	Unit
Temperature rising Area	1 to 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to -4	°C/sec
Max dwell time above 100°C	420	sec

*Typical data for reflow process. Alternatively, wave soldering is also possible