



PAGE 1/3	ISSUE 29-01-19A	SERIES OCTIS	PART NUMBER OCTI307550
----------	-----------------	--------------	------------------------

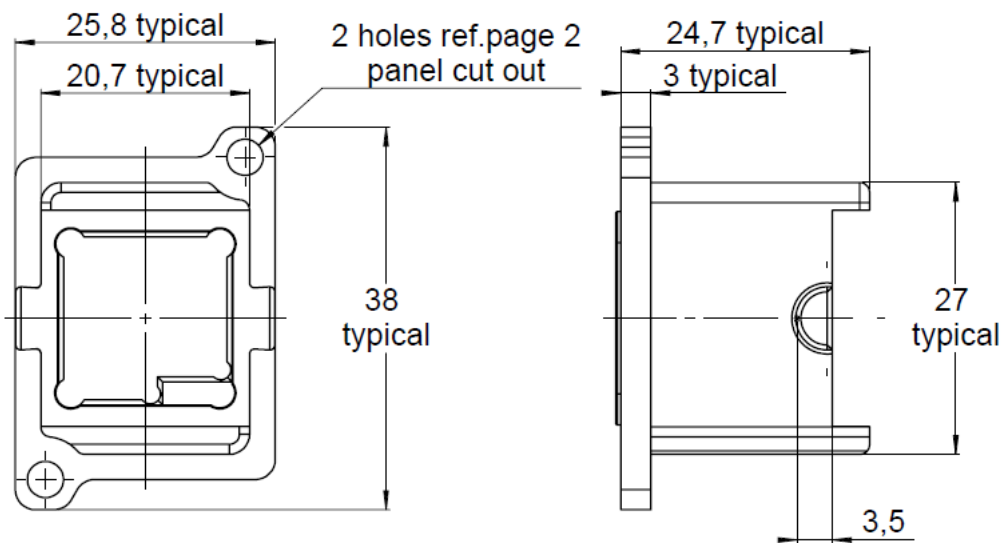

Packing configuration

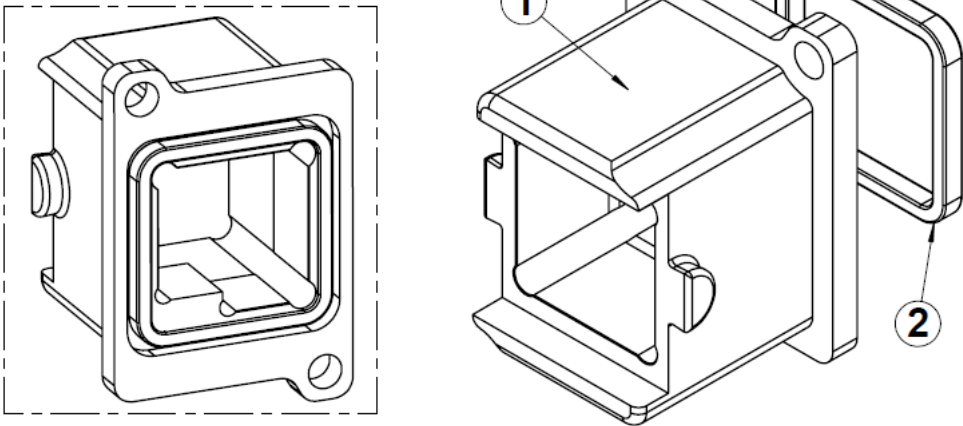

All dimensions are in mm. Tolerances according ISO 2768 m-H

DESCRIPTION

REP	COMPONENT	MATERIALS	PLATING
1	Screwable Receptacle Body	ALUMINIUM	CHEMICAL PASSIVATION
2	Panel Sealing Gasket	SILICONE	-

PAGE 2/3

ISSUE **29-01-19A**

SERIES **OCTIS**


PART NUMBER **OCTI307550**

**GENERAL CHARACTERISTICS**

<b>Mechanical</b> Mating endurance (cycles) Vibration Weight (g)	IEC 61300-2-2 IEC 61300-2-1 -	100 Compliant 18.1760
<b>Environmental</b> Protection class Operating temperature (°C) Storage temperature (°C) Humidity (damp heat) (%RH) Salt Mist  RoHS Flammability UVB Resist (h)	IEC 60529 IEC 61300-2-22 IEC 61300-2-22 IEC 61300-2-19 IEC 61300-2-26 (ISO21207 method B) - UL 94 ASTM G154 cycle 2	IP67 * -40 / +85 -65 / +85 5 / 95 720h *  Compliant V0 1000
<b>Others:</b> Equipment interface  Packaging	-  -	For use with OCTIS™ plug or receptacle cap  24 pcs by tray

\* Mated condition

**PANEL CUT OUT**

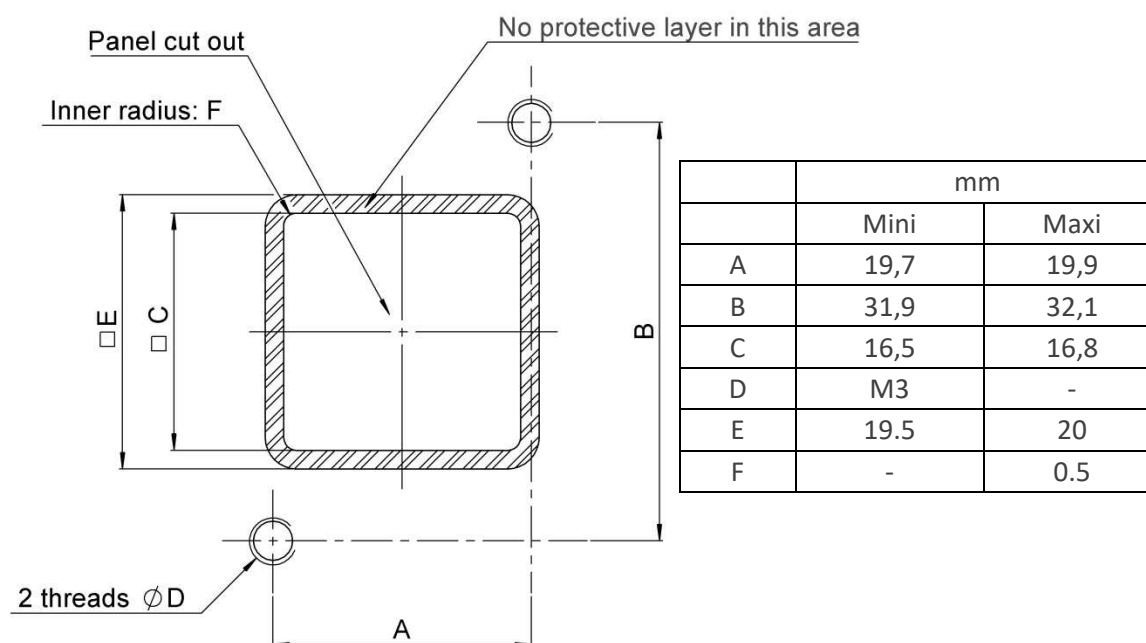

PAGE 3/3

ISSUE **29-01-19A**

SERIES **OCTIS**

PART NUMBER **OCTI307550**

**POSITIONNING AND PATTERN DEFINITION**

