
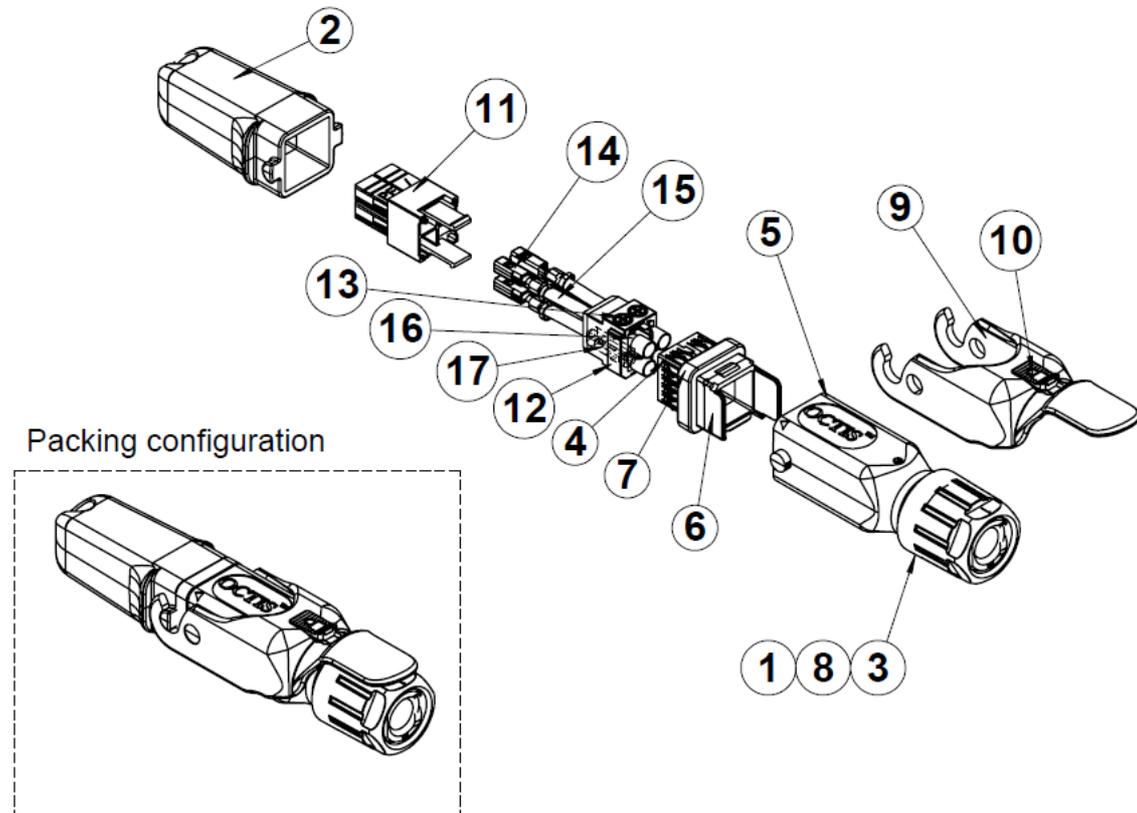


PAGE 1/3	ISSUE 19-02-19A	SERIES OCTIS	PART NUMBER OCTI347550
----------	-----------------	--------------	------------------------

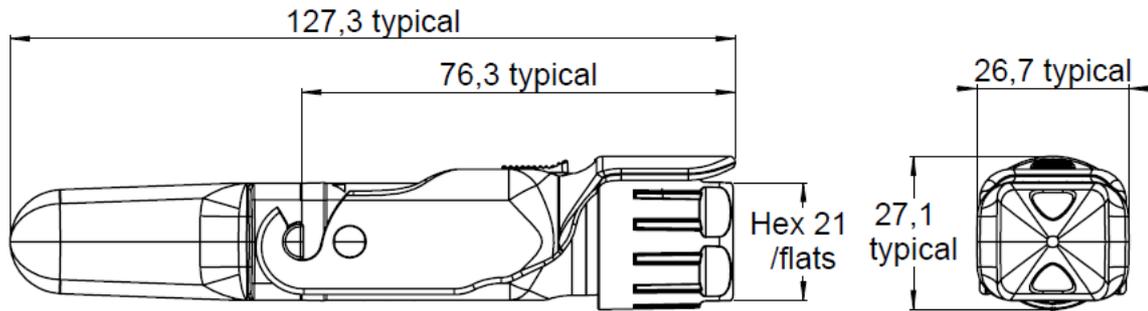

All dimensions are in mm. Tolerances according ISO 2768 m-H

**DESCRIPTION**

REP	COMPONENT	MATERIALS	PLATING
1	Tightening cone	NYLON	-
2	Plug cap	PBT GF	-
3	Gland nut	PBT GF	PURPLE COLOR
4	Grounding ring	STAINLESS STEEL	-
5	Housing	PBT GF	-
6	Holder	ZAMAK	PASSIVATED
7	Interface sealing gasket	SILICON	-
8	Rubber gland Ø9	SILICON	-
9	Lever	IXEF	-
10	Locking button	PBT	-
11	Terminal block	PLASTIC	-
12	Inner block	PLASTIC	-
13	Screw	STEEL	-
14	Power contact	COPPER ALLOY	Sn
15	Wire	COPPER	-
16	Bootlace	COPPER+PLASTIC	-
17	Inner contact	BRASS	NiSn

PAGE 2/3	ISSUE <b>19-02-19A</b>	SERIES <b>OCTIS</b>	<b>PART NUMBER OCTI347550</b>
----------	------------------------	---------------------	-------------------------------

**GENERAL CHARACTERISTICS**

<p><b>Mechanical</b></p> <p>Mating endurance (cycles) Axial Tensile load (N typical) Vibration Recom. coupling torque (N.cm)</p> <p><u>Terminal block:</u> Screw driver type Recom. coupling torque (N.cm)</p> <p>Weight (g)</p>	<p>IEC 61300-2-2 IEC 61300-2-4 IEC 61300-2-1 - - - -</p>	<p>100 200 * Compliant 250 min /300 max  TBD 40  64.280</p>
<p><b>Environmental</b></p> <p>Protection class Operating temperature (°C) Storage temperature (°C) Humidity (damp heat) (%RH) Salt Mist</p> <p>RoHS Flammability UVB Resist (h)</p>	<p>IEC 60529 IEC 61300-2-22 IEC 61300-2-22 IEC 61300-2-19 IEC 61300-2-26 (ISO21207 method B) - UL 94 ASTM G154 cycle 2</p>	<p>IP67 ** -40 / +85 -65 / +85 5 / 95 720h **  Compliant V0 1000</p>
<p><b>Electrical</b></p> <p>Working voltage Current rating</p> <p>Insulation resistance Dielectric withstanding voltage</p>	<p>- - - EIA 364-21 EIA 364-20</p>	<p>Max. 300 AC or DC 16A with AWG16 wire (stranded) 20A with AWG14 wire (stranded) 5000MΩ minimum initial 1000MΩ minimum after environmental aging</p>
<p><b>Others</b></p> <p>Equipment interface Board socket Cables Packaging</p>	<p>- - - -</p>	<p>For use with OCTIS™ panel interface or receptacle ***  For use with OCTI.364.500  For use with power cable : 2 stranded conductors from 1.5 mm<sup>2</sup> (AWG16 = 7xAWG24) to 2.5 mm<sup>2</sup> (AWG14 = 7xAWG22) and braiding  Unitary in plastic bag with assembly note</p>

\* Depending on cable characteristics

\*\* Mated condition


\*\*\* If the interface is to be die casted into the equipment panel, please contact Radiall for license conditions and interface definition

PAGE 3/3	ISSUE 19-02-19A	SERIES OCTIS	PART NUMBER OCTI347550
----------	-----------------	--------------	------------------------

**RUBBER GLAND SELECTION CHART**

$\Phi D^*$	Recommended gland size
From 4.8 min to 5.8 Max	"6"
From 5.8 min to 6.8 Max	"7"
From 6.8 min to 7.8 Max	"8"
From 7.8 min to 8.8 Max	"9"
From 8.8 min to 9.8 Max	"10"
From 10.3 min to 11.3 Max	"11.5"

Gland size is written on the gland edge



\*Cable diameter under the gland. If the cable has a sleeve, the diameter over the sleeve should be considered  
 The tolerances of  $\Phi D$  should be taken into account to make sure it is always within the specified range