



PAGE 1/4	ISSUE 31-01-19A	SERIES OCTIS	PART NUMBER OCTI407500
----------	-----------------	--------------	------------------------

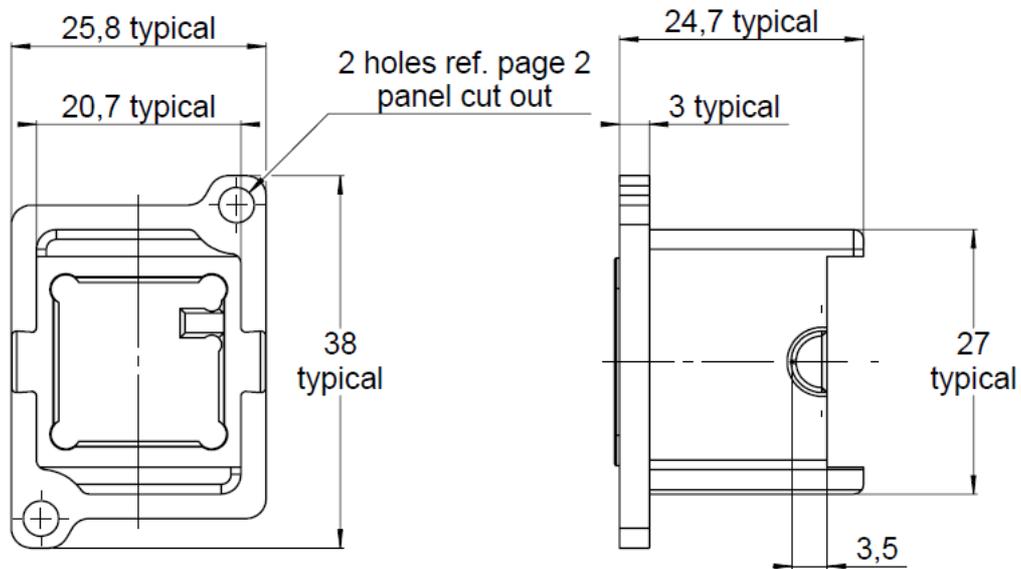

Packing configuration

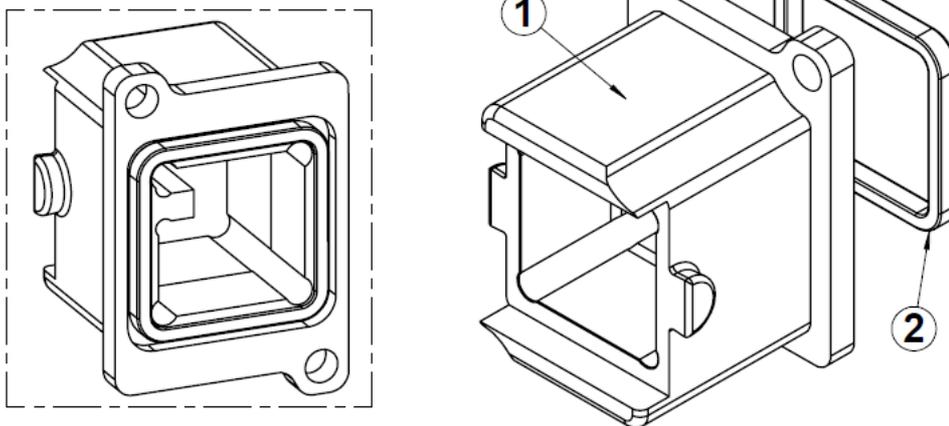

All dimensions are in mm. Tolerances according ISO 2768 m-H

DESCRIPTION

REP	COMPONENT	MATERIALS	PLATING
1	Screwable Receptacle Body	ALUMINIUM	CHEMICAL PASSIVATION
2	Panel Sealing Gasket	SILICONE	-


PAGE 2/4	ISSUE 31-01-19A	SERIES OCTIS	PART NUMBER OCTI407500
----------	-----------------	--------------	------------------------

GENERAL CHARACTERISTICS

Mechanical Mating endurance (cycles) Vibration Weight (g)	IEC 61300-2-2 IEC 61300-2-1 -	100 - 17.5610
Environmental Protection class Operating temperature (°C) Storage temperature (°C) Salt Mist RoHS Flammability UVB Resist (h)	IEC 60529 IEC 61300-2-22 IEC 61300-2-22 IEC 61300-2-26 (ISO21207 method B) - UL 94 ASTM G154	IP67 * -40 / +85 -65 / +85 720h * Compliant V0 1000
Others: Packaging	-	Hot formed Trays in card board box 24 pcs by tray

* When mated with corresponding Radiall OCTIS plug



PANEL CUT OUT

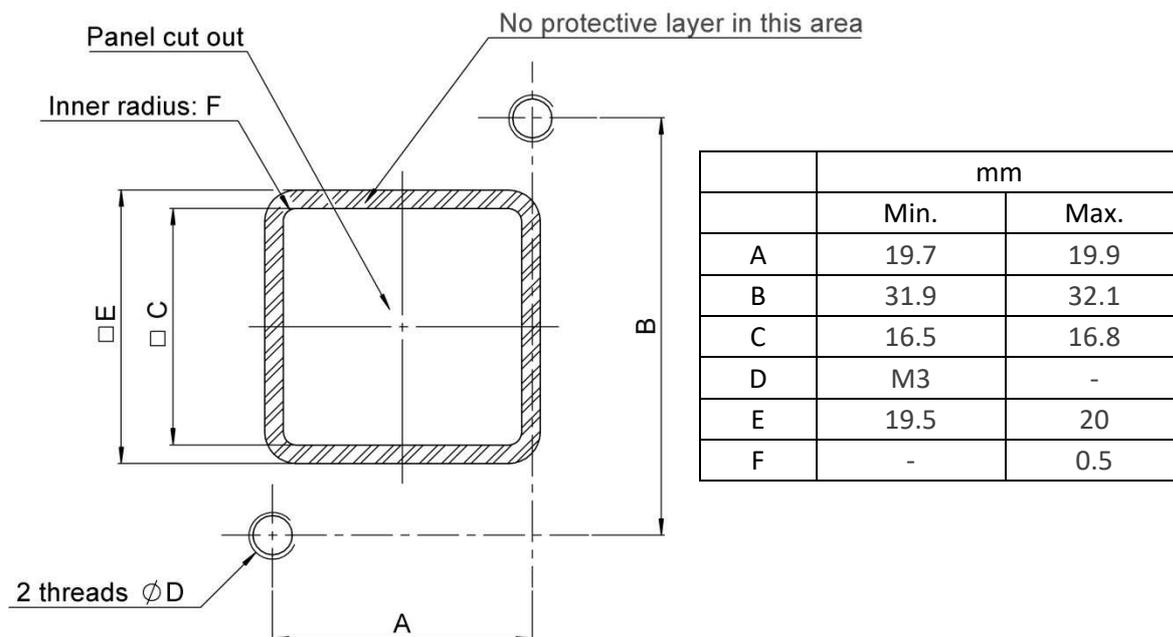

PAGE 3/4	ISSUE 31-01-19A	SERIES OCTIS	PART NUMBER OCTI407500
----------	-----------------	--------------	------------------------

PACKAGING:


Packaging in Hot Formed Tray

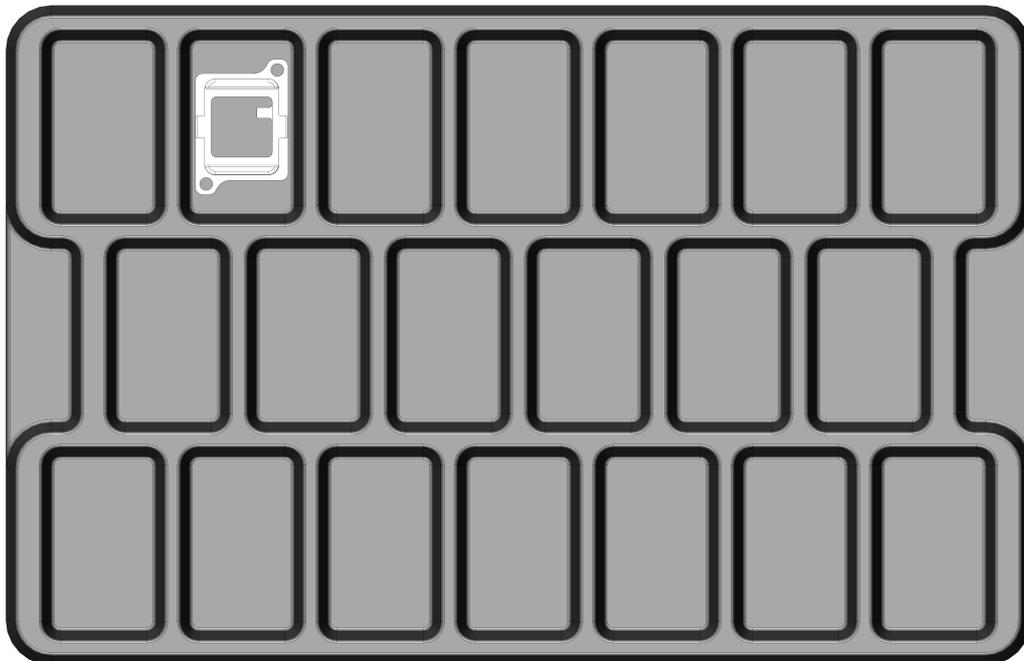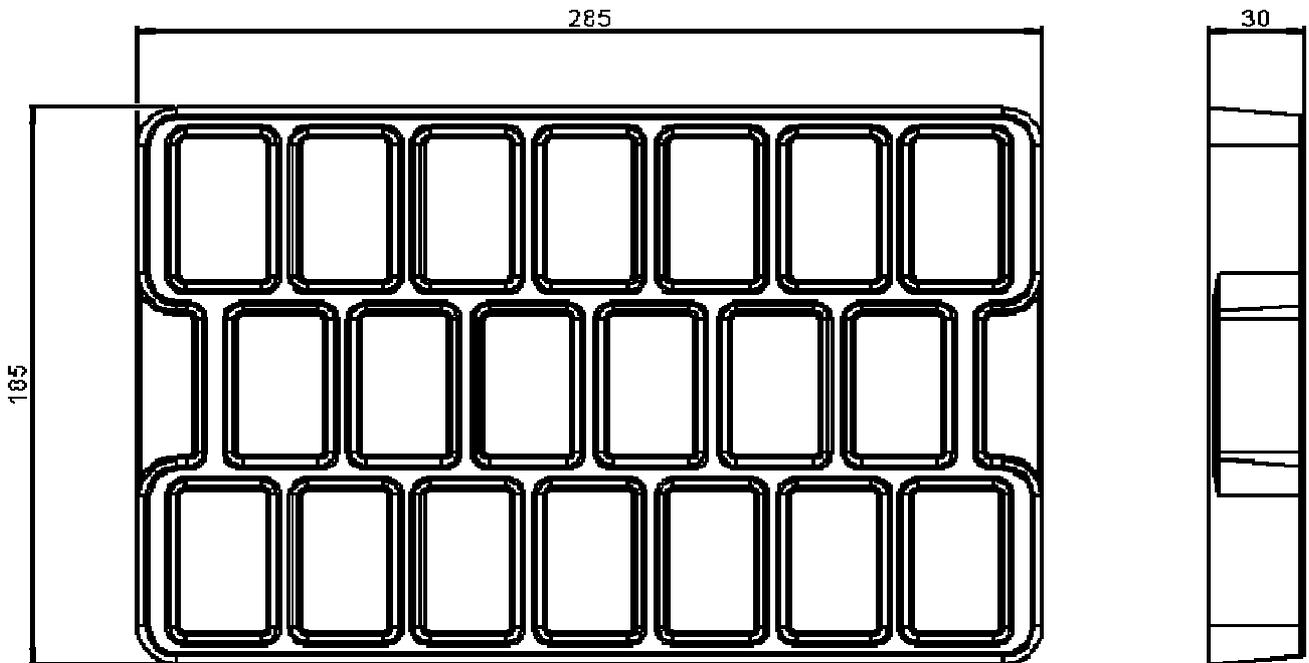

only for positioning illustration

PAGE 4/4	ISSUE 31-01-19A	SERIES OCTIS	PART NUMBER OCTI407500
----------	-----------------	--------------	------------------------

POSITIONNING AND PATTERN DEFINITION

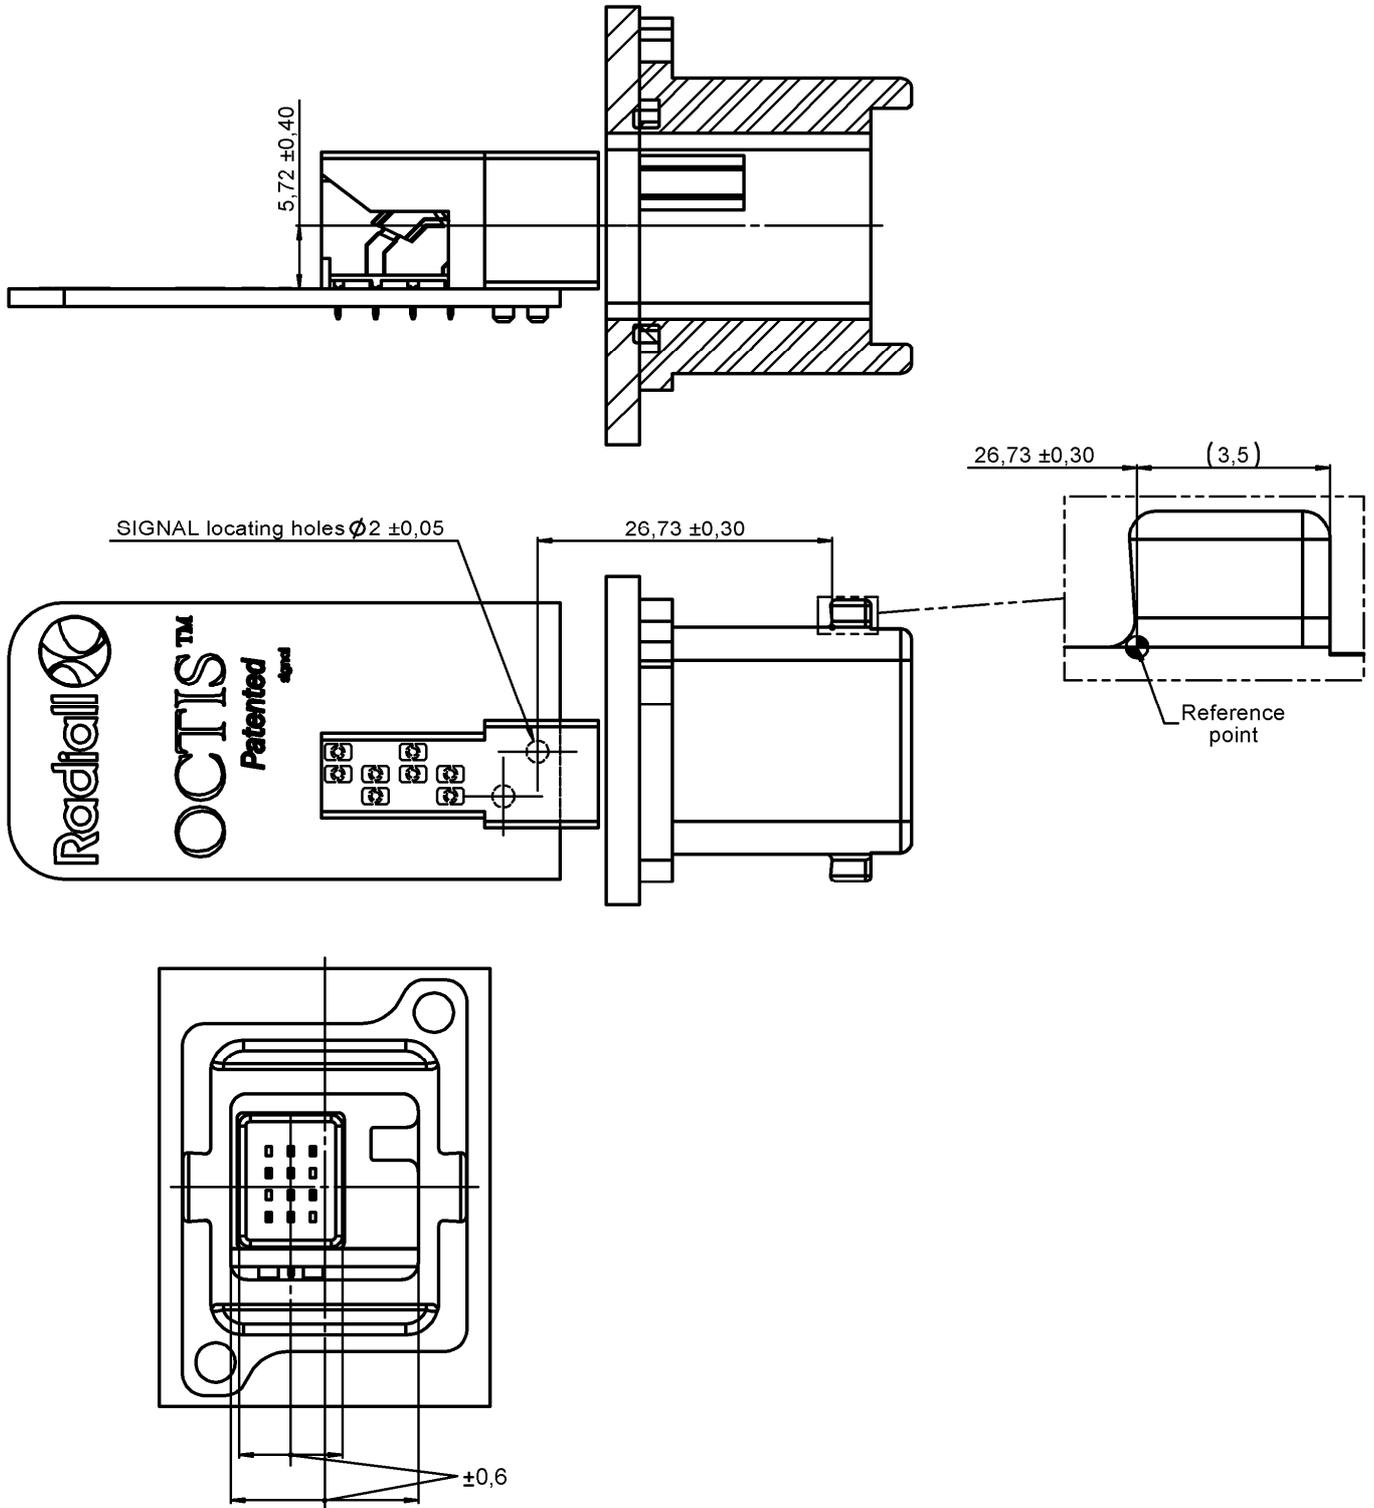

Centering of the SIGNAL receptacle vs receptacle cavity

only for positioning illustration