

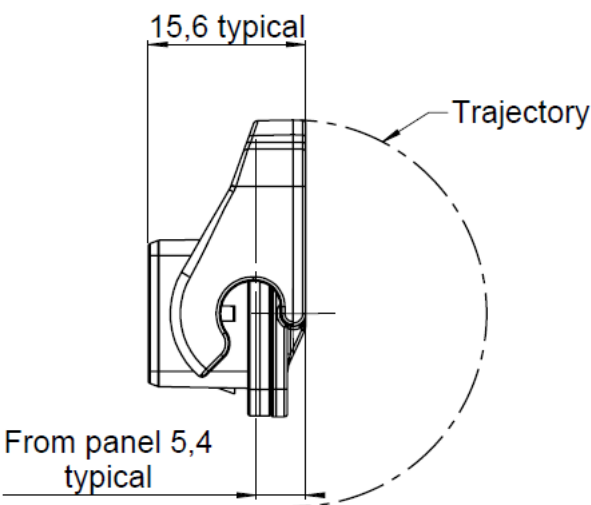
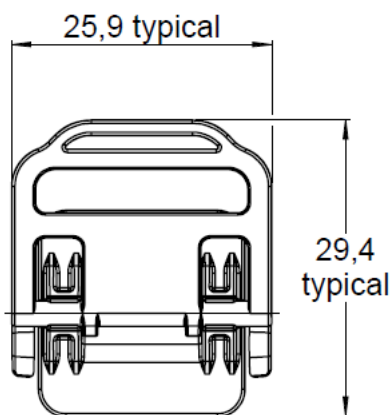


PAGE 1/2	ISSUE 14-02-19A	SERIES OCTIS	PART NUMBER OCTI957550
----------	-----------------	--------------	------------------------

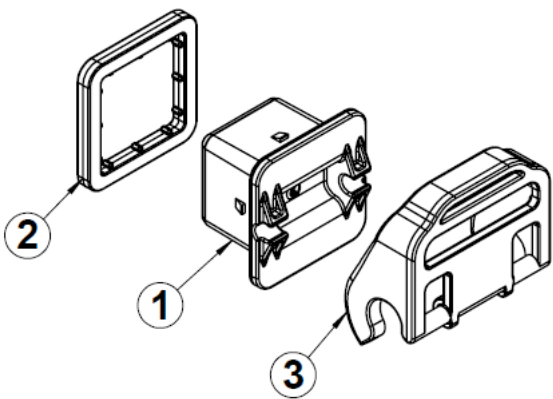

Packing configuration



All dimensions are in mm. Tolerances according ISO 2768 m-H

DESCRIPTION

REP	COMPONENT	MATERIALS	PLATING
1	Protective cap	PBT GF	-
2	Interface sealing gasket	SILICONE	-
3	Lever	IXEF	-

PAGE 2/2

ISSUE 14-02-19A

SERIES OCTIS

PART NUMBER OCTI957550

### GENERAL CHARACTERISTICS

<b>Mechanical</b> Mating endurance (cycles) Vibration Weight (g)	IEC 61300-2-2 IEC 61300-2-1 -	100 - 5.1300
<b>Environmental</b> Protection class Operating temperature (°C) Storage temperature (°C) Humidity (damp heat) (%RH) Salt Mist  RoHS Flammability	IEC 60529 IEC 61300-2-22 IEC 61300-2-22 IEC 61300-2-19 BS 720H according to Telcordia GR-950 - UL 94	IP67 * -40 / +85 -65 / +85 5 / 95 720h *  Compliant V0
<b>Others:</b> Installation  Packaging	-  -	For use with standard OCTIS™ panel interface or receptacle **  Unitary in plastic bag

\* Mated condition

\*\* If the interface is to be die casted into the equipment panel, please contact Radiall for license conditions and interface definition

### INSTALLATION

