

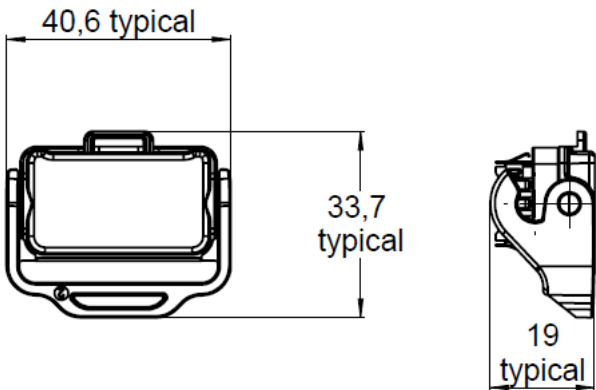


PAGE 1/2	ISSUE <b>07-03-19A</b>	SERIES <b>OCTIS</b>	PART NUMBER <b>OCTIW57500</b>
----------	------------------------	---------------------	-------------------------------

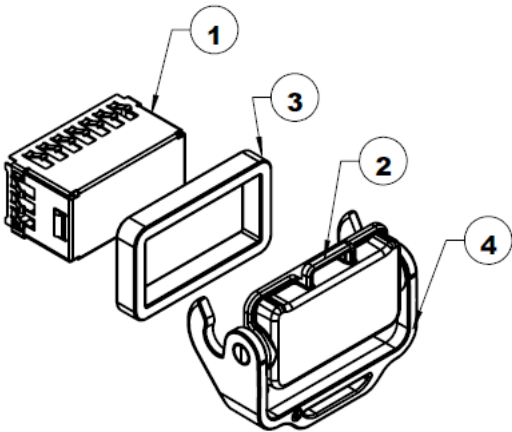

Packing configuration



All dimensions are in mm. Tolerances according ISO 2768 m-H

**DESCRIPTION**

REP	COMPONENT	MATERIALS	PLATING
1	Shielding ring	STAINLESS STEEL	-
2	Cap	PBT GF	BLACK
3	Gasket	SILICONE	BLACK
4	Lever	IXEF1521	BLACK

PAGE 2/2

ISSUE **07-03-19A**

SERIES **OCTIS**

PART NUMBER **OCTIW57500**

**GENERAL CHARACTERISTICS**

<b>Mechanical</b> Mating endurance (cycles) Vibration Force: Locking (N) Unlocking (N) Weight (g)	IEC 61300-2-2 IEC 61300-2-1 - -	100 - 15 N min. / 60 N Max. 15 N min. / 60 N Max. 11.3870
<b>Environmental</b> Protection class Operating temperature (°C) Storage temperature (°C) Humidity (damp heat) (%RH) Salt Mist  RoHS Flammability UVB Resist (h)	IEC 60529 IEC 61300-2-22 IEC 61300-2-22 IEC 61300-2-19 IEC 61300-2-26 (ISO21207 method B) - UL 94 ASTM G154 cycle 2	IP67 * -40 / +85 -65 / +85 5 / 95 720h *  Compliant V0 1000
<b>Others</b> Installation  Packaging	- -	For use with OCTIS O&M panel interface or receptacle kit **  250 pcs per bag with ESD protection Box 400x300x210

\* Mated condition

\*\* If the interface is to be die casted into the equipment panel, please contact Radiall for license conditions and interface definition