




PAGE 1/2	ISSUE 1430A	SERIES OPUS	PART NUMBER OPUS407700
----------	-------------	-------------	-------------------------------

Dimensions in mm

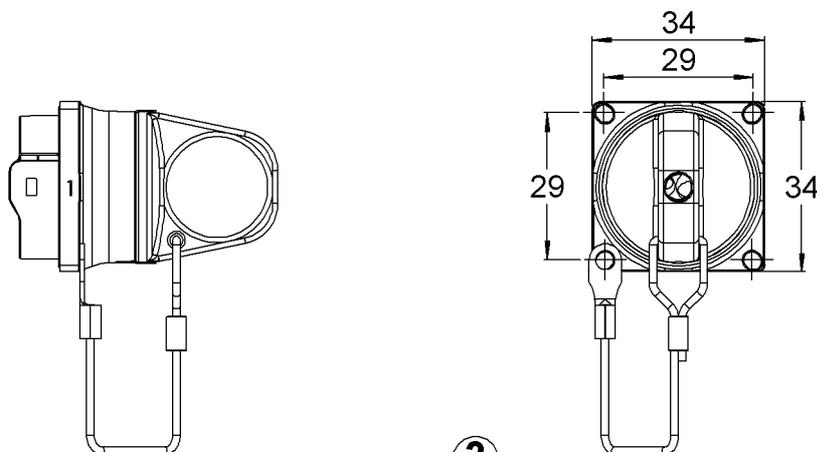

	mm	
	Maxi	mini
A	28.8	28.6
B	M3	
C	29.05	28.95
D	29.05	28.95

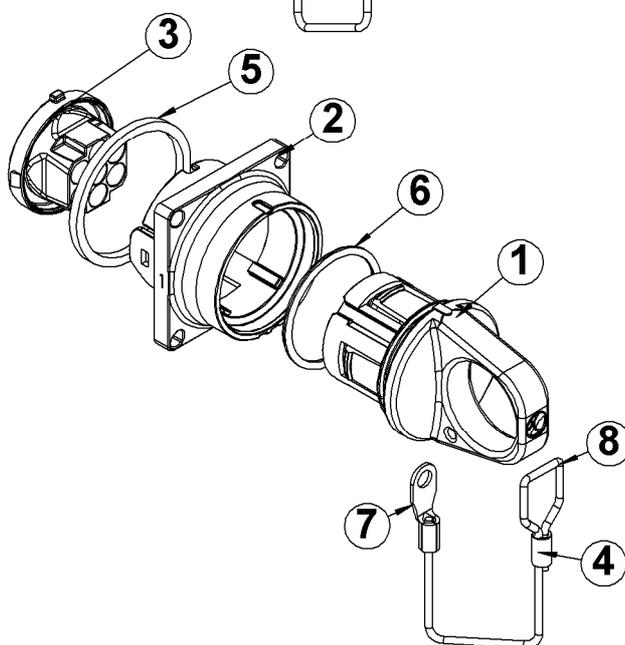

DESCRIPTION

REP	COMPONENT	MATERIALS	PLATING
1	Protection Cap	PBT	-
2	Receptacle Body	PBT 30GF	-
3	7 Coax Insert	PBT 30GF	-
4	Sleeve	Brass	BBR
5	Gasket	Silicone	-
6	O-ring	Silicone	-
7	Lug	Bras	BBR
8	Rope	PA	-

PAGE 2/2	ISSUE 1430A	SERIES OPUS	PART NUMBER OPUS407700
----------	-------------	-------------	-------------------------------

Dimensions in mm

GENERAL CHARACTERISTICS

Mechanical Mating endurance Tensile load	IEC 60169-1 IEC 60169-1	100 cycles 100N
Environmental Protection class Operating temperature Storage temperature Humidity (damp heat) Salt Mist flammability RoHS	IEC 60529 IEC 60068-2-1 ; 2-2 IEC 60068-2-1 ; 2-2 IEC 60068-2-30 IEC 60068-2-11 UL94 -	IP67 mated -40°C to +85°C -25°C to +75°C 5% to 95% RH 672h V1 Compliant
Other Compatibility Cable Weight Packaging	For use with coaxial cables with SMP-COM connectors (R222.900.222) For use with OPUS.417.700 plug 7 coaxial cables max 20 g Unitary in plastic bag. 50 parts in a box.	