


PAGE 1/2	ISSUE 11-12-24A	SERIES ANTENNA	PART NUMBER R380500324
----------	--------------------	-------------------	-------------------------------

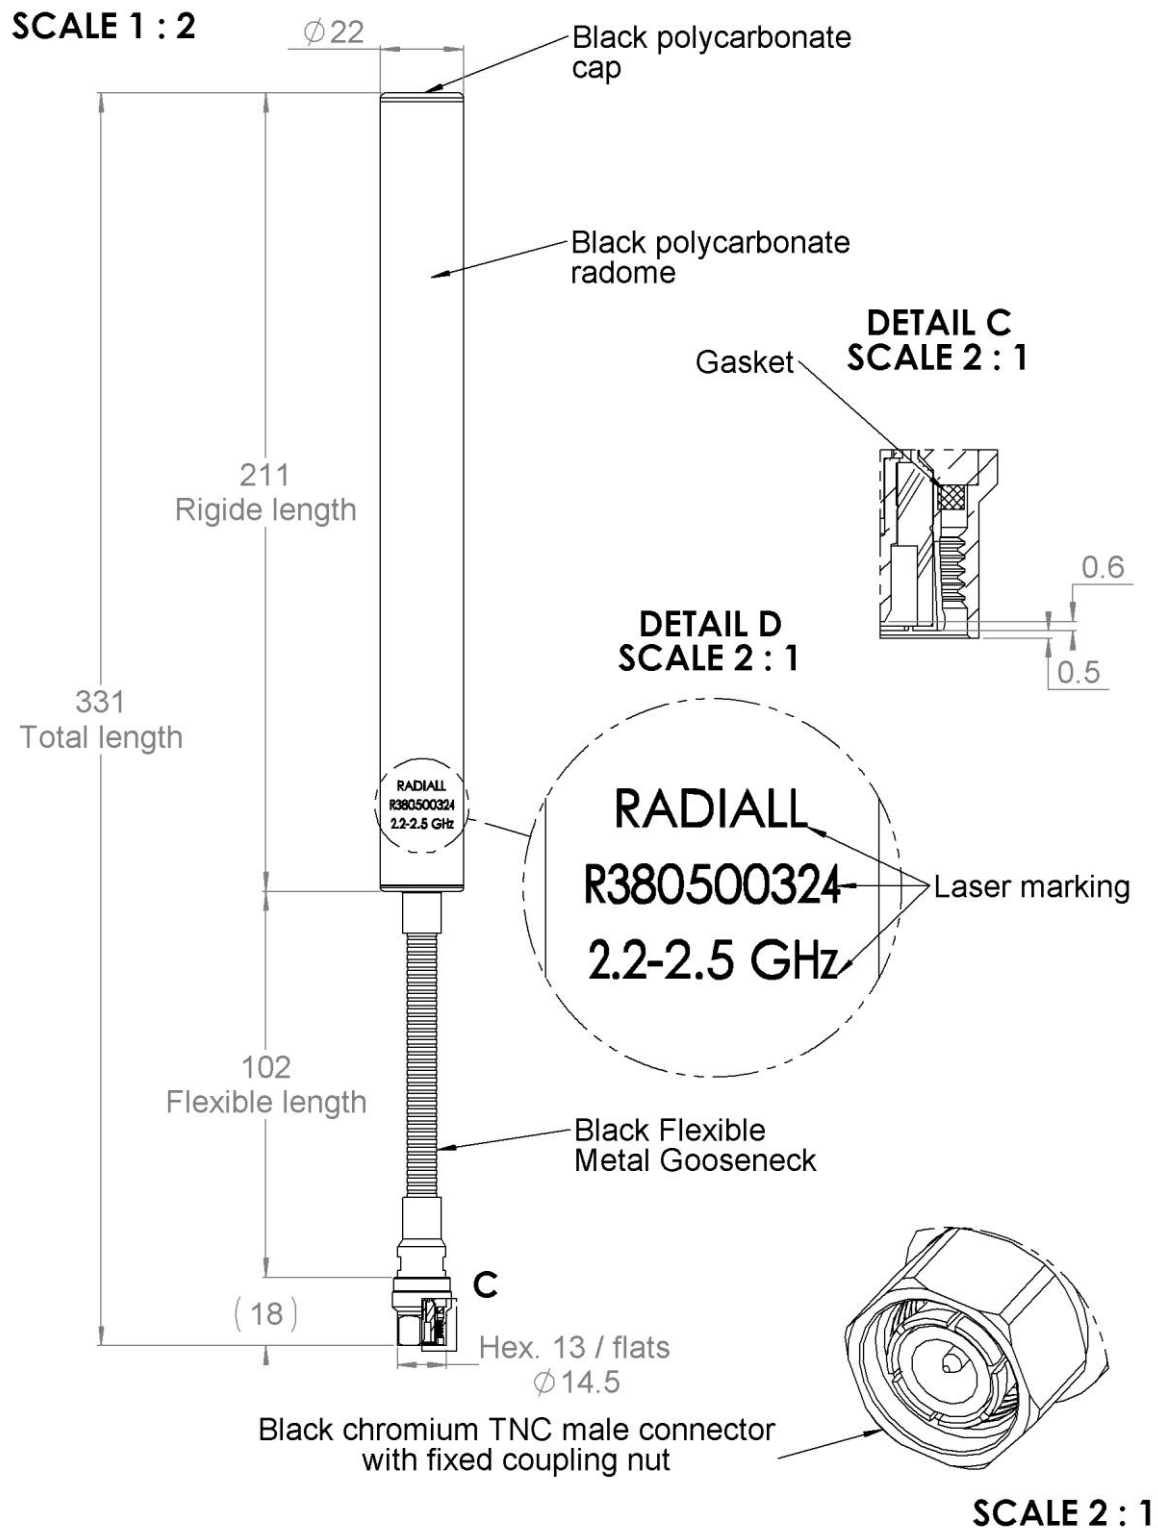

All dimensions are in mm. Tolerances according ISO 2768 m-H

PAGE 2/2	ISSUE 11-12-24A	SERIES ANTENNA	PART NUMBER R380500324
----------	--------------------	-------------------	------------------------

ELECTRICAL CHARACTERISTICS

Frequency :	2.2-2.5	GHz
Nominal Impedance :	50	Ω
VSWR :	2.0:1	Typ.
Gain	5	dBi typ.
Radiation Pattern	Omni-directional See patterns	
Polarization :	LINEAR VERTICAL	
Power rating :	10	W CW
Connector type :	TNC plug (Male)	Fixed coupling nut

MECHANICAL CHARACTERISTICS

Antenna Color :	BLACK MATTE	
Antenna Radome Material :	PC	
Articulation (Gooseneck) :	+/- 90° - 100 cycles	
Torsion (connector):	4.5	N.m max
Axial Pull	90	N max
Weight :	125	g max
Overall length :	331	mm
RoHS Compliant:	Yes	

ENVIRONMENTAL CHARACTERISTICS

Operating temperature :	-40/+85 °C IAW MIL-STD-810G Meth. 501.5 & 502.5, Proc. II
Storage temperature :	-55/+85 °C IAW MIL-STD-810G Meth. 501.5 & 502.5, Proc. I
Thermal Shocks	-40/+71 °C IAW MIL-STD-810G Meth. 503.5, Proc. I-C
Immersion (mated to radio)	2m, for 2h IAW MIL-STD-810G Meth. 512.5, Proc. I
Solar Radiation :	IAW MIL-STD-810G Meth. 505.5, Proc. I Category A1
Fungus	IAW MIL-STD-810G Meth. 508.6
Salt Fog	96 h IAW MIL-STD-810G Meth. 509.5
Vibration	Minimum Integrity IAW MIL-STD-810G Meth. 514.6, Cat. 24
Transit drops	26 drops IAW MIL-STD-810G Meth. 516.6, Proc. IV