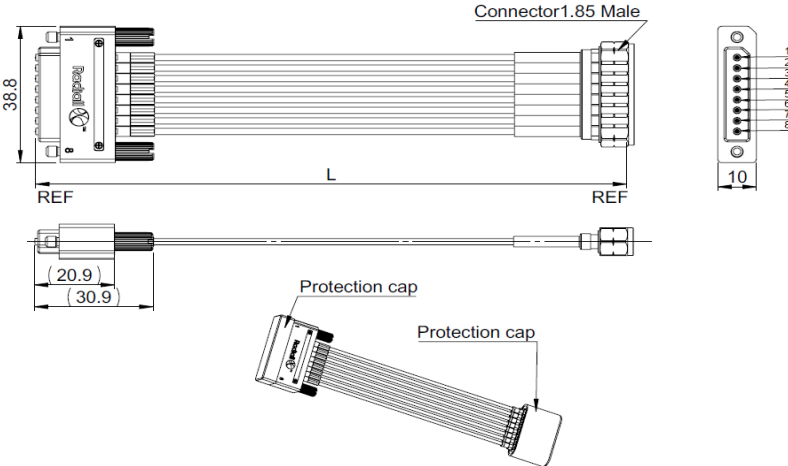


PAGE 1/1		ISSUE	05-12-24A	SERIES	COAXHD	PART NUMBER	R625208MA0
CUSTOMER : -		SPECIFICATION : -		ISSUE : -		DATE: -	
All dimensions are in mm							
<div></div>							
CONNECTORS DESIGNATION Connector 1: 1.85mm Male Straight Plug Connector 2: COAXHD Straight Plug (Radiall design and patent)							
Torque wrench : 0.9 N.m Torque wrench : NA N.m min							
	COMPONENTS	MATERIALS	PLATING (μm)	MATERIALS	PLATING (μm)		
	Body	STAINLESS STEEL	PASSIVATION	COPPER ALLOY/ALUMINUM	GOLD,ANODIZED		
	Center contact	COPPER ALLOY	GOLD	COPPER ALLOY	GOLD		
	Outer contact			-			
	Insulator	PEI		PEI			
	Gasket						
	Others parts	STAINLESS STEEL	PASSIVATION	COPPER ALLOY	BB		
ELECTRICAL CHARACTERISTICS							
Characteristic impedance		50 Ohms		Return loss(dB):		15 typ	
Frequency band :		DC - 70 GHz		Phase delay(ps):		±1	
Insertion loss (dB):		2.5 Max					
MECHANICAL CHARACTERISTICS							
Static bending radius :		9 mm		Nominal Weight(g):		53.9	
Single cable				L(mm)		152 Nominal	
Dynamic bending radius :		18 mm					
Single cable							
Life (Connectors) :		1000* Cycles					
ENVIRONMENTAL CHARACTERISTICS							
Connector temperature range :		0/+85 °c					
Remark :		*1000 cycles for COAXHD connector, 500 cycles for 1.85 mm connector					
		Cable Assembly is RoHS compliant.					