


RIGHT ANGLE MALE SHIELDED HOUSING WITH PRESS PEG

R694.261.035

SERIES MCC2

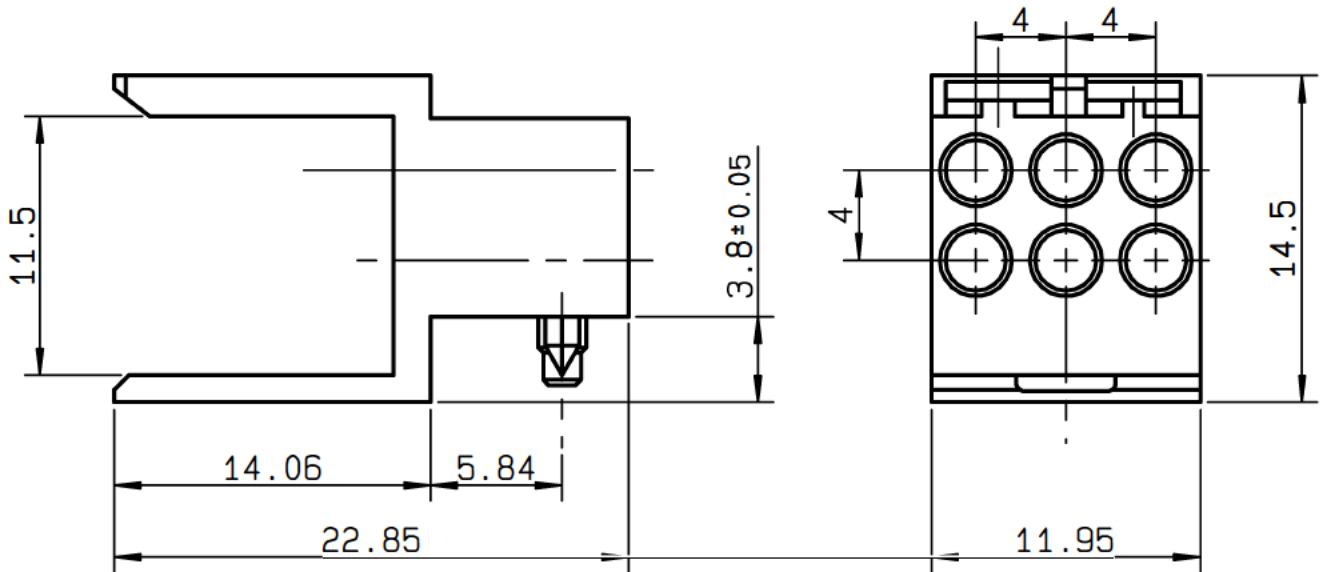

NOMINAL IMPEDANCE	Ω	CABLES :	
FREQUENCY RANGE	GHz		
TEMPERATURE RATING	°C		
V.S.W.R	+ x F(GHz) Maxi		
RF INSERTION LOSS	\sqrt{F} (GHz) dB Maxi		
VOLTAGE RATING	Veff Maxi		
DIELECTRIC WITHSTANDING VOLTAGE	Veff Mini		
INSULATION RESISTANCE	M Ω Mini	OTHERS CHARACTERISTICS	
HERMETIC SEAL	Atm.cm ³ /s	CABLE RETENTION	N Mini
LEAKAGE (pressurized only)		CENTER CONTACT RETENTION	
MECHANICAL DURABILITY	Cycles	Axial force - mating end	N Mini
WEIGHT	gr	Axial force - opposite end	N Mini
SPECIFICATION		Torque	cm.N Mini
		RECOMMENDED TORQUES	
		Mating	cm.N
		Panel nut	cm.N
		Clamp nut	cm.N

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given) in micrometers
BODY			
OUTER CONTACT			
CENTER CONTACT			
INSULATOR			
GASKET			
OTHERS PIECES	LIQUID CRISTAL POLYMER	NICKEL	

ISSUE

22-02-24A

CREATION DATE

19/03/1998

FILE PART-NUMBER

EPC 95-08


RADIALL®

The information given here is subject to change without notice.
Design changes may be in order to improve the product .

Connect to the future