



EDGE CARD SWITCH
PACKAGING BY REEL OF 2800

R199.006.803

Series : MOEBIUS

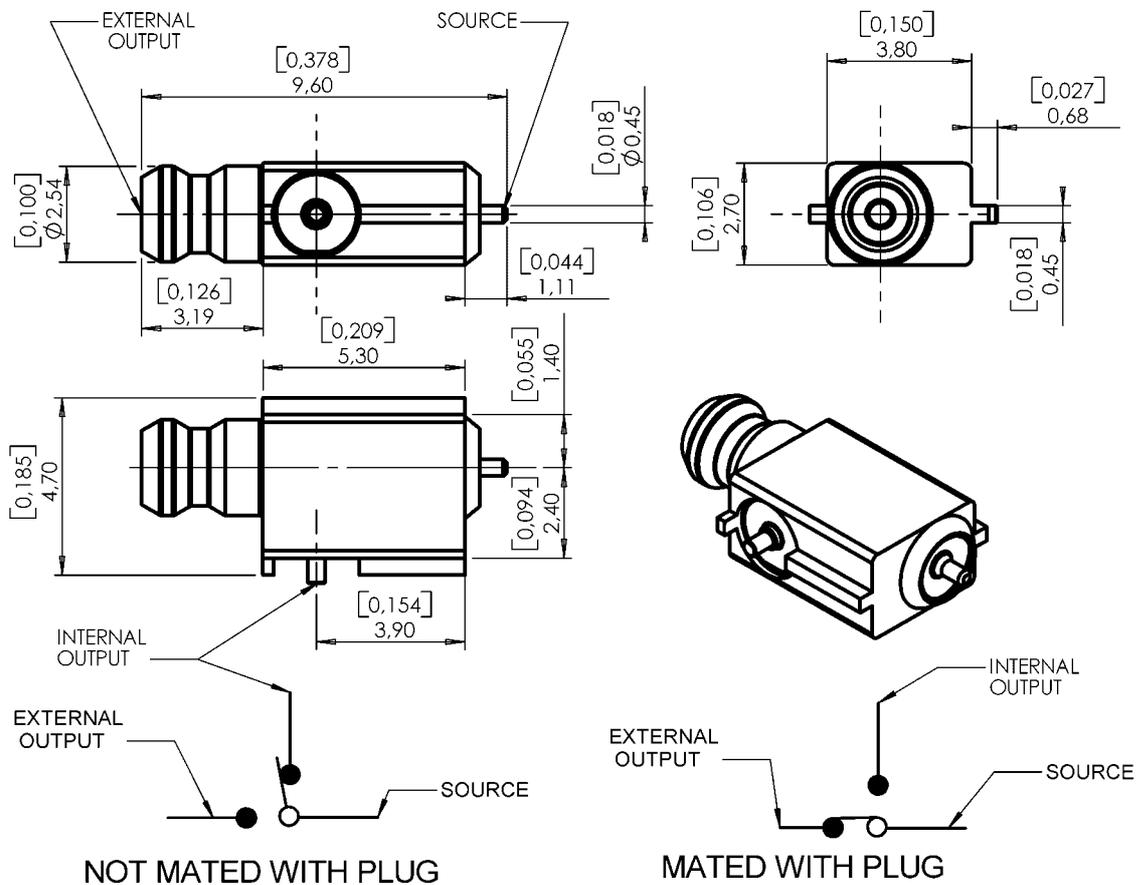

All dimensions are in mm/ [inch]



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	NPGR
CENTER CONTACT	BRASS	NPGR
OUTER CONTACT	BRASS	NPGR
INSULATOR	-PEEK	
GASKET	-	
OTHERS PARTS	-NC	
.	.	
.	.	

Issue : 0710 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



EDGE CARD SWITCH
PACKAGING BY REEL OF 2800

R199.006.803

Series : MOEBIUS

PACKAGING

SPECIFICATION

Standard	Unit	Other
2800	-	Contact us

ELECTRICAL CHARACTERISTICS

ENVIRONMENTAL

Impedance	50 Ω
Frequency	0-6 GHz
VSWR (not mated)	1.2+0.05 x F(GHz) Maxi
VSWR (mated with plug)	1.05+0.05 x F(GHz) Maxi
*Insertion loss DC to 2 Ghz	0.15 dB Maxi
*Insertion loss 2 to 3 Ghz	0.2 dB Maxi
*Insertion loss 3 to 6 Ghz	0.5 dB Maxi
* not mated with PCB	
**Isolation loss DC to 1Ghz	30 dB min
**Isolation loss 1 to 3Ghz	20 dB min
**Isolation loss 3 to 6Ghz	20 dB min
** mated with plug	
Voltage rating	100 Veff Maxi
Dielectric withstanding voltage	250 Veff mini
Insulation resistance	3000 MΩ mini

Operating temperature	-40/+110 ° C
Hermetic seal	Atm.cm3/s
Panel leakage	

OTHER CHARACTERISTICS

Assembly instruction

Others :
Vibration no electrical discontinuity of 10 μs or more
Condition test : 10 to 500 Hz , single amplitude of 1.5 mm , speed of 10 g , 2 hours in each of the 3 axis

MECHANICAL CHARACTERISTICS

Mating life	25000 Cycles
Weight	0,38000. g

Issue : 0710 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



PRELIMINARY

EDGE CARD SWITCH

R199.006.803

PACKAGING BY REEL OF 2800


Series : **MOEBIUS**

SOLDER PROCEDURE

1. Deposition of solder paste ‘Sn Ag4 Cu0.5’ on mounting zone by screen printing application. We recommend a low residue flux.
We advise a thickness of 150 microns mini (0.006 inch mini). Verify that the edges of the zone are clean.
2. Placement of the receptacle on the mounting zone with an automatic machine of ‘pick and place’ type.
Video camera is recommended for the positioning of the component. Adhesive agents must not be used on the receptacle.
3. Soldering by infra-red reflow.
Below, please find the typical profile to use.
4. Cleaning of printed circuit boards.
5. Checking of solder joints and position of the component by visual inspection.

TEMPERATURE PROFILE

INFORMATION ABOUT PAD

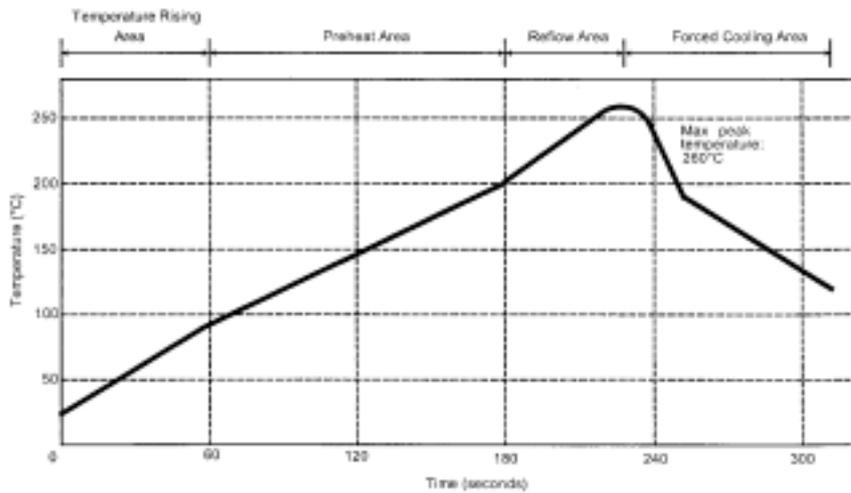

Parameter	Value	Unit
Temperature rising Area	1 - 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to - 4	°C/sec
Max dwell time above 100°C	420	sec

Issue : 0710 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




EDGE CARD SWITCH

R199.006.803

PACKAGING BY REEL OF 2800

Series : MOEBIUS

INFORMATION ABOUT PAD

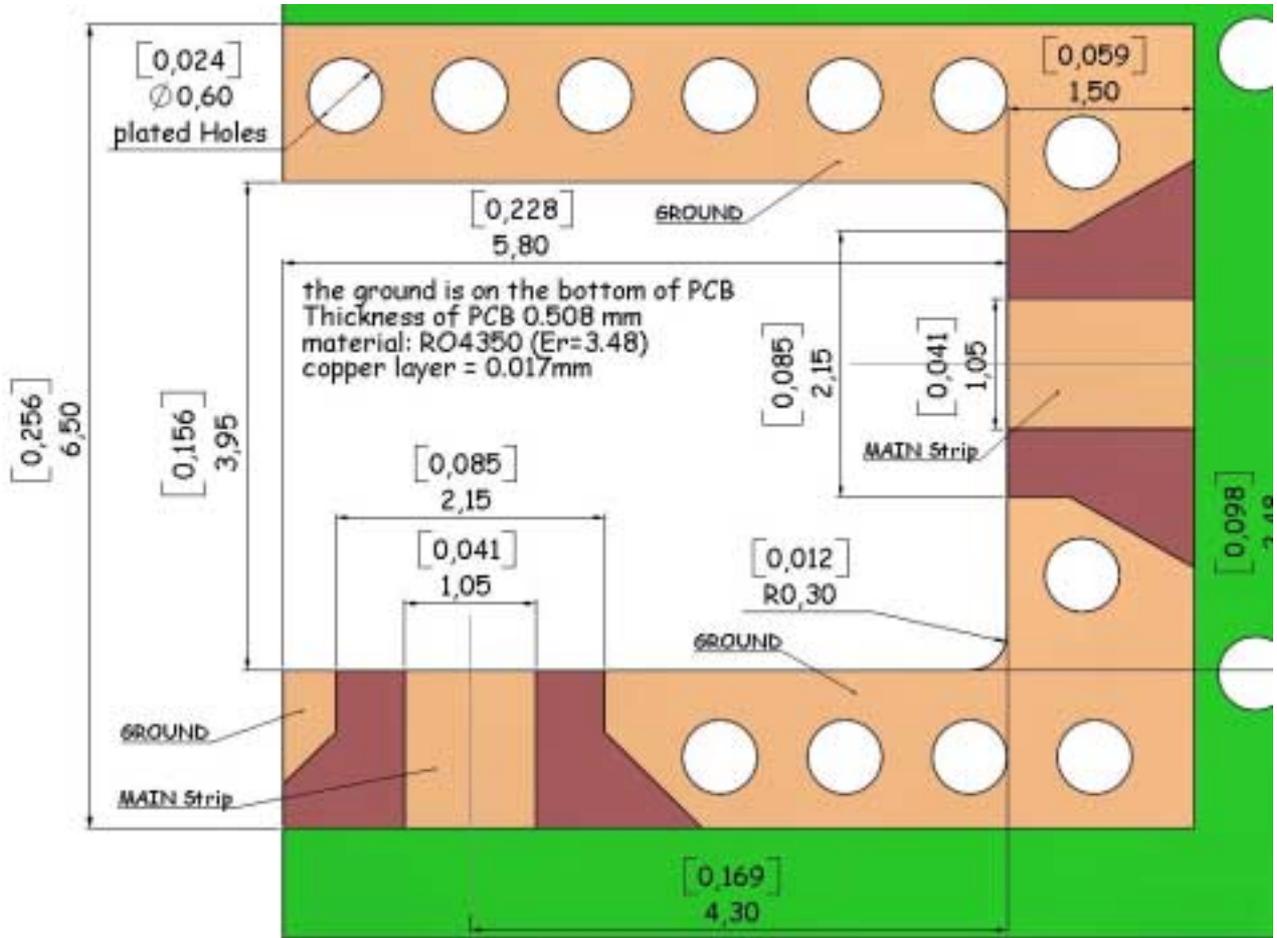

Issue : 0710 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




EDGE CARD SWITCH
PACKAGING BY REEL OF 2800

R199.006.803


Series : MOEBIUS

PACKAGING by reel

2800 pieces by reel full package on reel (dia 330 mm or 13 inch) , weight of on reel =1,2 Kg

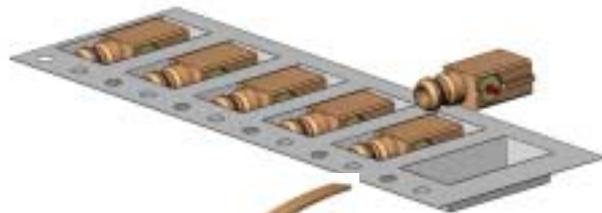

Suction area diameter 3 mm or 0.118 inch

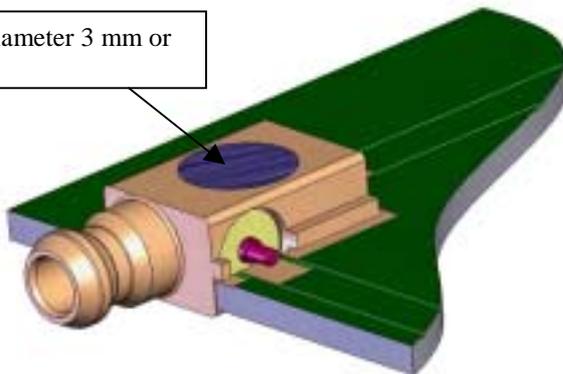

Issue : 0710 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



PRELIMINARY