


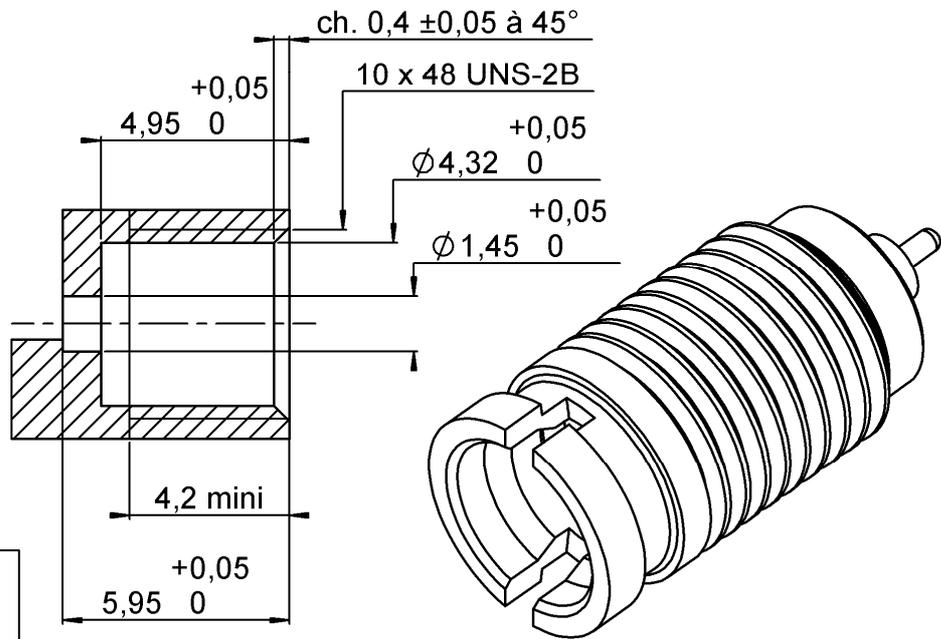


PAGE 1/3	ISSUE 1428A	SERIES SMP LOCK	PART NUMBER R222L10001
----------	-------------	-----------------	------------------------

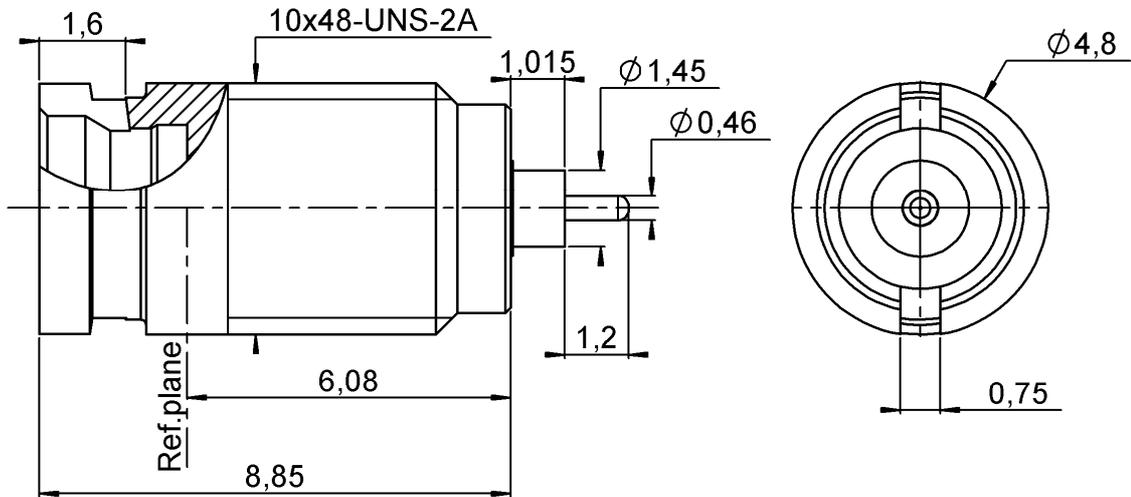

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
Body	STAINLESS STEEL	PASSIVATED.
Center contact	BERYLLIUM COPPER	GOLD 1.27 OVER NICKEL 1.27
Outer contact	-	-
Insulator	PTFE	-
Gasket	-	-
Others parts	-	-
-	-	-
-	-	-

PAGE 2/3	ISSUE 1428A	SERIES SMP LOCK	PART NUMBER R222L10001
----------	--------------------	------------------------	-------------------------------

PACKAGING

Standard	Unit	Other
100	Contact us	Contact us

ELECTRICAL CHARACTERISTICS

Impedance		50		Ω
Frequency		0-26.5		GHz
VSWR	1.35	+	0,0000	x F(GHz) Maxi
Insertion loss			0.1	√F(GHz) dB Maxi
RF leakage	-	(80*	- F(GHz) dB Maxi
Voltage rating			335	Veff Maxi
Dielectric withstanding voltage			500	Veff mini
Insulation resistance			5000	MΩ mini

MECHANICAL CHARACTERISTICS

Center contact retention				
Axial force – Mating End		6.7		N mini
Axial force – Opposite end		6.7		N mini
Torque		NA		N.cm mini
Recommended torque				
Mating		NA		N.cm
Panel nut		90		N.cm
Mating life		500		Cycles mini
Weight		0,7700		g

ENVIRONMENTAL

Operating temperature	-65/+165		°C
Hermetic seal		NA	Atm.cm3/s
Panel leakage		NA	

SPECIFICATION


OTHER CHARACTERISTICS

Assembly instruction:

Others:
*** up to 18 GHz**

ADDITIONAL INFORMATIONS
MOUNTING AND REPLEACEMENT INSTRUCTIONS

1. Connector must be screwed or unscrewed with adapted torque driver R282.339.002 (recommended coupling torque : 90 Ncm)
Screx driver : R282.360.002
2. Slide on the connector in F direction until it stops against the tool.

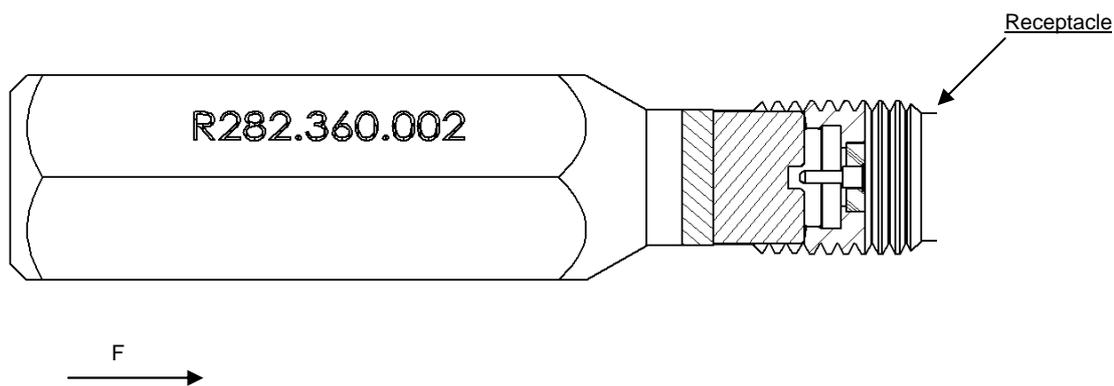

3. Screw the whole into the housing until activation of the torque driver.
4. Withdraw the tool and solder the center contact

