





PAGE 1/3	ISSUE 08-12-15B	SERIES MMBX	PART NUMBER R223435010
----------	------------------------	--------------------	-------------------------------

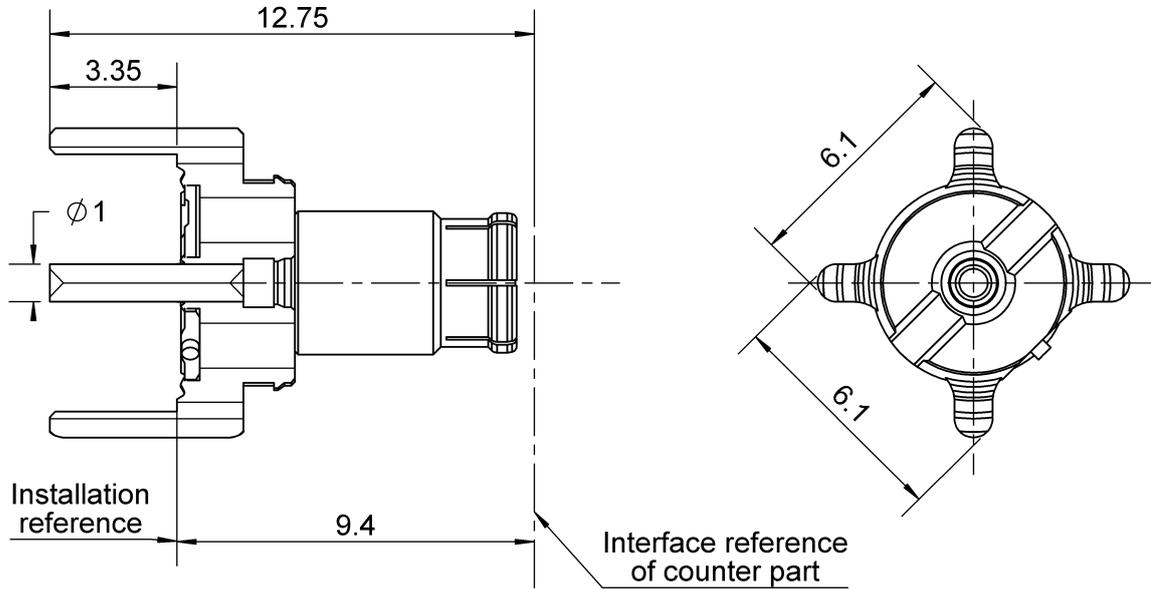

PANEL CUT OUT

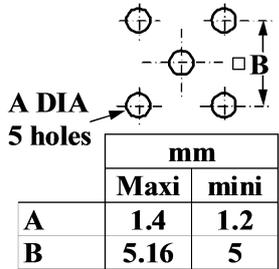

All dimensions are in mm.

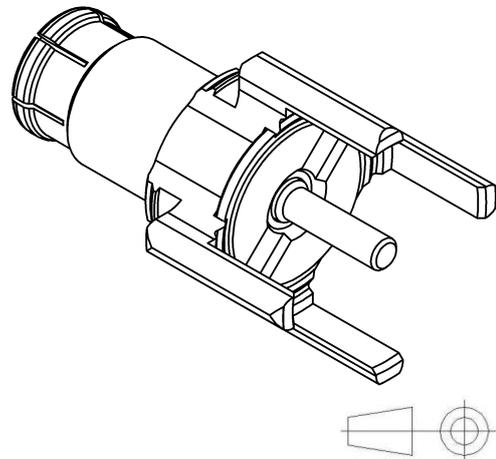

COMPONENTS	MATERIALS	PLATING (µm)
Body	BERYLLIUM COPPER,BRASS	NPGR
Center contact	BERYLLIUM COPPER,BRASS	NPGR
Outer contact	-	-
Insulator	LIQUID CHRYSTAL POLYMER,PTFE	-
Gasket	-	-
Others parts	-	-
-	-	-
-	-	-

PAGE 2/3	ISSUE 08-12-15B	SERIES MMBX	PART NUMBER R223435010
----------	------------------------	--------------------	-------------------------------

PACKAGING

Standard	Unit	Other
100	Contact us	Contact us

ELECTRICAL CHARACTERISTICS

Impedance		50	Ω
Frequency		0-12.4	GHz
VSWR	1.083	+	0.0000 x F(GHz) Maxi
Insertion loss		0.12	\sqrt{F} (GHz) dB Maxi
RF leakage	- (100	- F(GHz)) dB Maxi
Voltage rating		330	Veff Maxi
Dielectric withstanding voltage		1000	Veff mini
Insulation resistance		1000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention			
Axial force – Mating End		10	N mini
Axial force – Opposite end		10	N mini
Torque		NA	N.cm mini
Recommended torque			
Mating		NA	N.cm
Panel nut		NA	N.cm
Mating life		100	Cycles mini
Weight		0.6500	g

ENVIRONMENTAL

Operating temperature	-55/+155	$^{\circ}\text{C}$
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

SPECIFICATION

357-0312 - -

OTHER CHARACTERISTICS

Assembly instruction:**NA**

Others:
to 6 GHz
Interface MMBX only up to 2.6 GHz
PCB to PCB -45dB up to 2.5 GHz

PAGE 3/3	ISSUE 08-12-15B	SERIES MMBX	PART NUMBER R223435010
----------	-----------------	-------------	------------------------

MMBX SERIES INFORMATIONS

PCB

