


PAGE 1/1	ISSUE20-02-23A	SERIESFLEXIBLE C/A	PART NUMBERRF2C-00010040
----------	----------------	--------------------	--------------------------

CUSTOMER : - SPECIFICATION : - ISSUE : - DATE: -

All dimensions are in mm

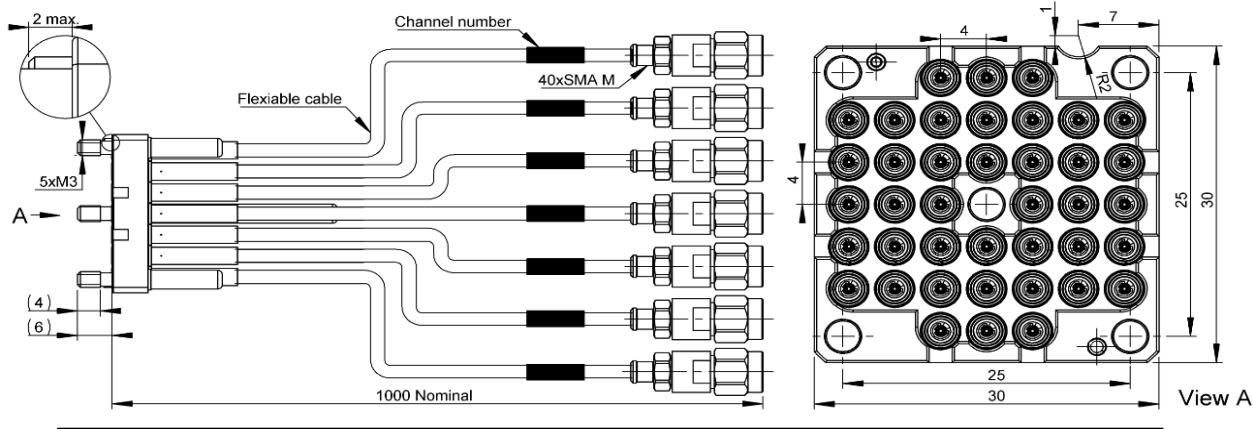

CONNECTORS DESIGNATION	Connector 1: Pressure Contact Connector (Radiall design and patent) NA	Connector 2: SMA PLUG
	Torque wrench : NA N.m	Torque wrench : 1 N.m min

ELECTRICAL CHARACTERISTICS

Characteristic impedance	50 Ohms	Insulation Resistance:	1000 MOhms min
Frequency band :	DC - 18 GHz	Voltage Rating:	175 Veff max
Insertion loss (dB):	1.56 Max dB at 0-4 GHz and 20 °C 2.53 Max dB at 4-10 GHz and 20 °C	Withstanding voltage:	350 Veff min
VSWR :	1.25 Max at 0-10 GHz and 20 °C 1.40 Max (for cable assembly through test PCB)		

MECHANICAL CHARACTERISTICS

Static bending radius :	15 mm	OC Floating range(Connector 1)	0.15 mm
Dynamic bending radius :	36 mm	CC Floating range(Connector 1)	0.15 mm
Life (Connectors) :	50 Cycles		

ENVIRONMENTAL CHARACTERISTICS

Connector temperature range :	10mk to 398.15K(+125°C)
Remark :	Non-magnetic Cable Assembly Cable Assembly is RoHS compliant.

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.