


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/12/10	A.D.M.

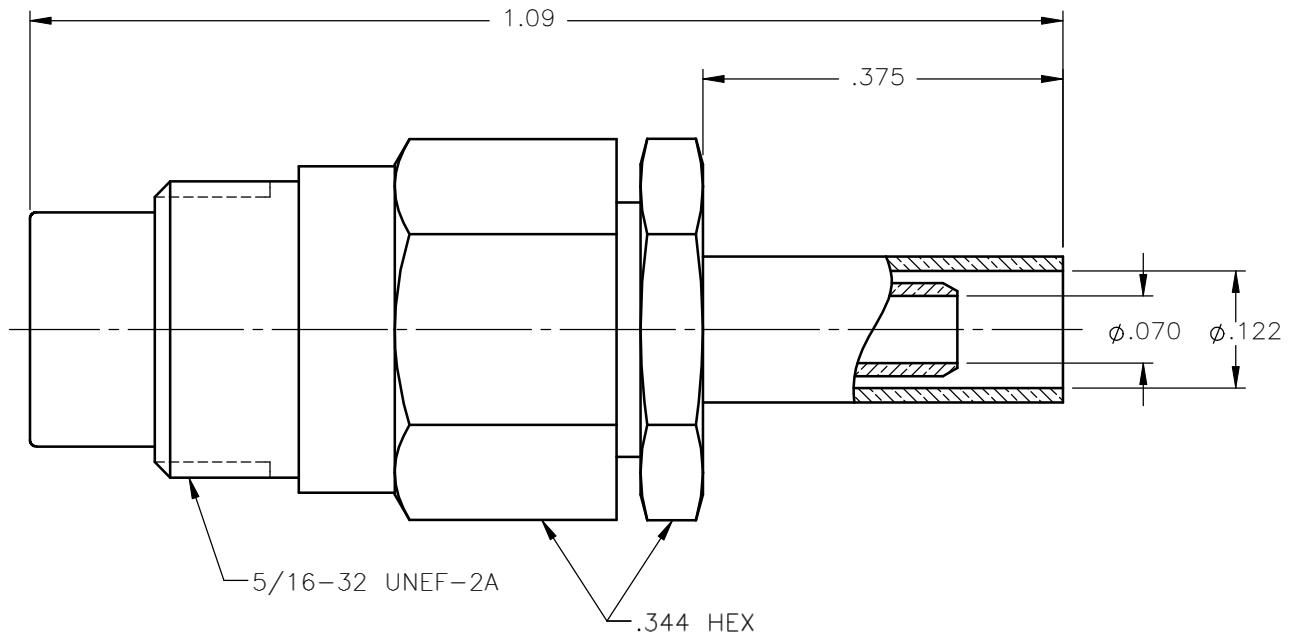

NOTES:



MATERIALS:

1. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
2. CRIMP SLEEVE = SEAMLESS LOWLEAD BRASS TUBE, ALLOY 330, SOFT ANNEAL TEMPER, .025/.060 GRAIN SIZE OR SEAMLESS COPPER TUBE PER ASTM B75, TYPE C12000, TEMPER: LIGHT ANNEAL O50 EXCEPT YIELD STRENGTH.
3. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = NICKEL PLATE PER QQ-N-290, CLASS 1, GRADE G, EXCEPT .0001 TO .0002 THICK OVER .00005 TO .0001 THICK COPPER PER MIL-C-14550.

Property of Radiall Incorporated
This document cannot be reproduced or
communicated to a third party without prior
written permission of RADIALL Incorporated.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: A.D.M.	DATE 02/12/10	 APPLIED ENGINEERING PRODUCTS a RADIALL company	104 John W. Murphy Dr. New Haven, CT 06513		
		CHKD: D.N.	DATE 02/12/10				
DECIMAL	ANGLE	APVD: J.M.	DATE 02/12/10	75 ohm SCREW-ON MALE JACK CRIMP TYPE FOR RG-316 & SIMILAR CABLES			
REFERENCE:		MATERIALS & FINISHES:					
ORIGINATED: A.D.M. DATE: 02/12/10		SEE NOTES		SIZE A	FSCM NO. 19505	DWG NO. 1701-7571-003	REV A
				SCALE 5:1		THIRD ANGLE PROJECTION 	SHEET 1 OF 1

1701-7571-003