


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/21/10	A.D.M.



NOTES:

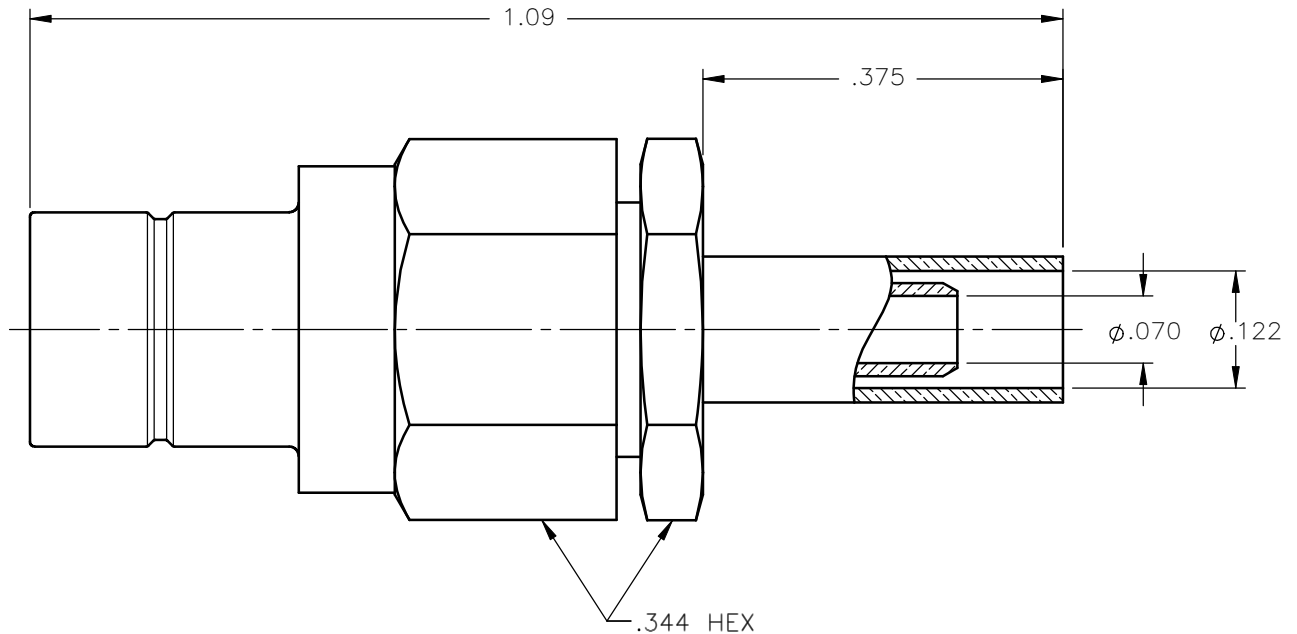

MATERIALS:

1. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
2. CRIMP SLEEVE = SEAMLESS LOWLEAD BRASS TUBE, ALLOY 330, SOFT ANNEAL TEMPER, .025/.060 GRAIN SIZE OR SEAMLESS COPPER TUBE PER ASTM B75, TYPE C12000, TEMPER: LIGHT ANNEAL O50 EXCEPT YIELD STRENGTH.
3. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

Property of Radiall Incorporated
This document cannot be reproduced or
communicated to a third party without prior
written permission of RADIALL Incorporated.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: A.D.M.	DATE 01/21/10	<div> APPLIED ENGINEERING PRODUCTS a RADIALL company</div> <div>104 John W. Murphy Dr. New Haven, CT 06513</div>				
		CHKD: D.N.	DATE 01/21/10					
DECIMAL	ANGLE	D.N.	01/21/10	75 ohm SNAP-ON MALE JACK CRIMP TYPE FOR RG-316 & SIMILAR CABLES				
		APVD: J.M.	DATE 01/21/10					
REFERENCE: ORIGINATED: A.D.M. DATE: 01/21/10		MATERIALS & FINISHES: SEE NOTES		SIZE A	FSCM NO. 19505	DWG NO. 2701-1571-003		REV A
				SCALE 5:1		THIRD ANGLE PROJECTION		SHEET 1 OF 1

2701-1571-003