


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/18/12	J.S.

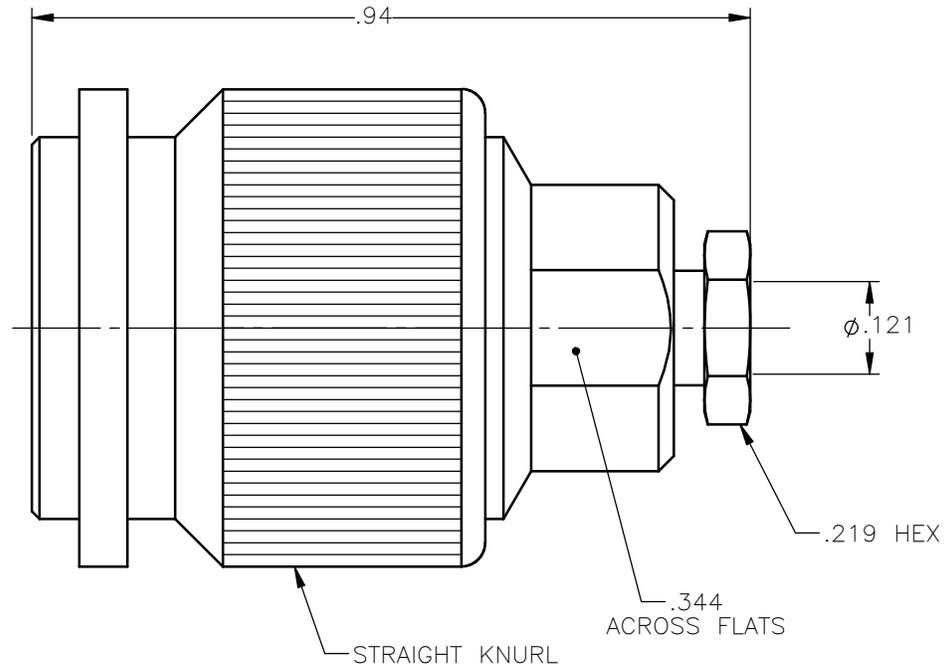

NOTES:

MATERIALS:

1. RETAINING RING = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
4. GASKET = SILICONE RUBBER PER ZZ-R-765, CLASS 2B, GRADE 65-75.

FINISHES:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN:	DATE	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.	
	J.S.	12/18/12		
DECIMAL	ANGLE	CHKD:	DATE	TNC STRAIGHT PLUG SOLDER TYPE FOR .085 S/R & SIMILAR CABLES
		M.J.	12/18/12	
		APVD:	DATE	
		J.M.	12/18/12	SIZE A FSCM NO. 19505 DWG NO. 6000-1041-010 REV A
REFERENCE:	MATERIALS & FINISHES:	SCALE 4:1 THIRD ANGLE PROJECTION		
ORIGINATED: J.S. DATE: 12/18/12	SEE NOTES	SHEET 1 OF 1		

6000-1041-010