


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/16/15	N.D.

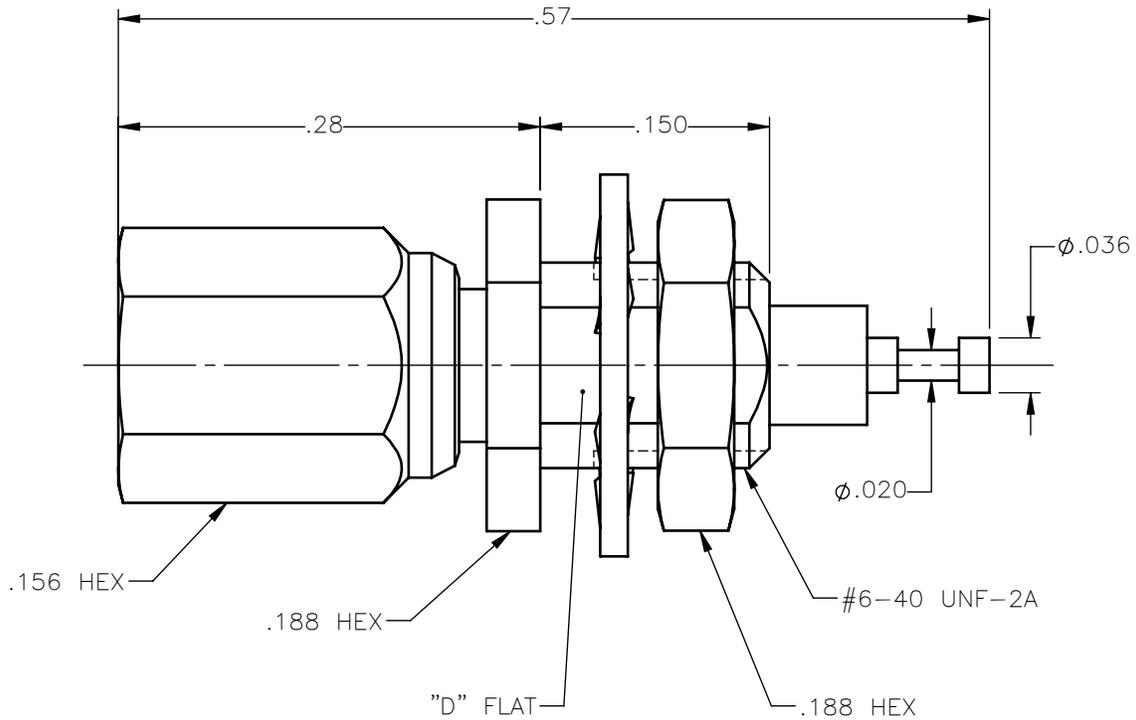

NOTES:

MATERIALS:

BODY, CONTACT & COUPLING NUT= BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
 NUT = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
 INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
 LOCKWASHER = PHOSPHOR BRONZE PER ASTM B139, COPPER ALLOY C53400, TEMPER H04.

FINISHES:

CONTACT = GOLD PLATE PER ASTM B488-01, TYPE II, 50 μ in MIN, GRADE C, OVER 100 TO 200 μ in STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
 ALL OTHER METAL PARTS = GOLD PLATE PER ASTM B488-01, TYPE II, 30 μ in MIN, GRADE C OVER 100 TO 200 μ in COPPER STRIKE PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN: N.D.	DATE: 03/16/15	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.		
	CHKD: D.N.	DATE: 03/16/15			
DECIMAL	ANGLE	APVD: J.M.	SSMC STRAIGHT JACK BULKHEAD/FRONT MOUNT TURRET RECEPTACLE		
		DATE: 03/16/15			
REFERENCE:	MATERIALS AND FINISHES:	SIZE: A	FSCM NO.: 19505	DWG NO.: 7017-1512-000	REV: A
ORIGINATED: N.D. DATE: 03/16/15	SEE NOTES	SCALE: 8:1	THIRD ANGLE PROJECTION		SHEET 1 OF 1

7017-1512-000