


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/07/13	D.N.



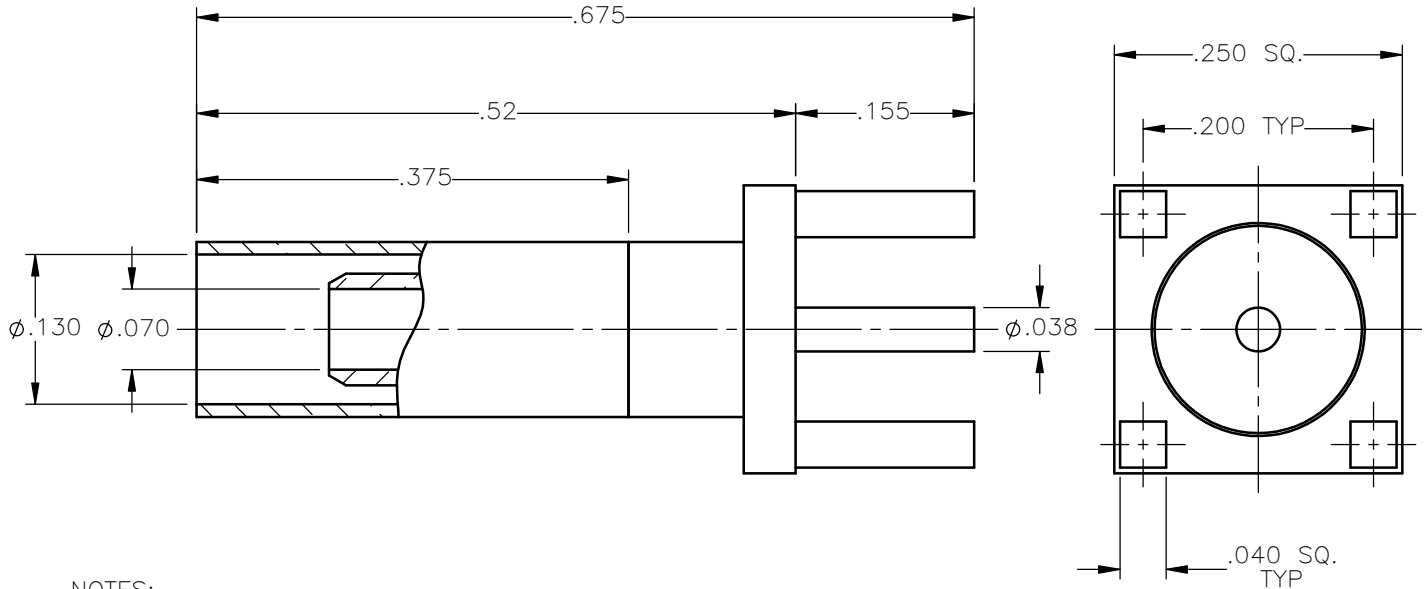

NOTES:

MATERIALS:

1. BODY & CONTACT = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. CRIMP SLEEVE = SEAMLESS LOWLEAD BRASS TUBE, ALLOY 330, SOFT ANNEAL TEMPER, .025/.060 GRAIN SIZE OR SEAMLESS COPPER TUBE PER ASTM B75, TYPE C12000, TEMPER: LIGHT ANNEAL O50 EXCEPT YIELD STRENGTH.

FINISHES:

1. BODY & CRIMP SLEEVE = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN:	DATE	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.	
		D.N.	08/07/13		
DECIMAL		CHKD:	DATE	STRAIGHT P.C.B. MOUNT CABLE TERMINATION CRIMP TYPE FOR RG-316DS & SIMILAR CABLE	
		J.S.	08/07/13		
ANGLE		APVD:	DATE	SIZE A FSCM NO. 19505 DWG NO. 8146-1521-019 REV A	
		J.M.	08/07/13		
REFERENCE:		MATERIALS & FINISHES:		SCALE 6:1 THIRD ANGLE PROJECTION	
ORIGINATED: D.N. DATE: 08/07/13		SEE NOTES		SHEET 1 OF 1	

8146-1521-019