
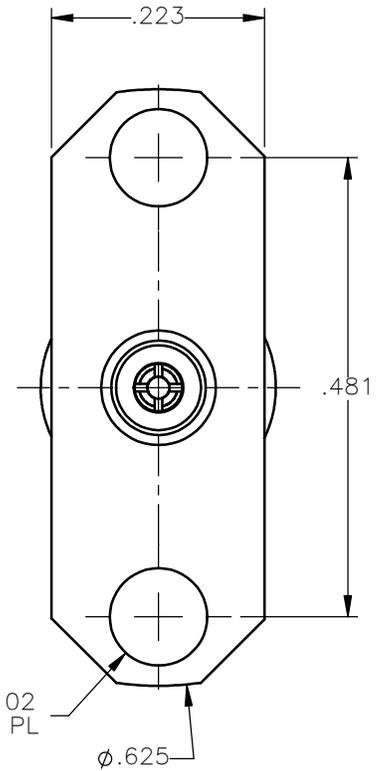


REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/15/14	D.N.

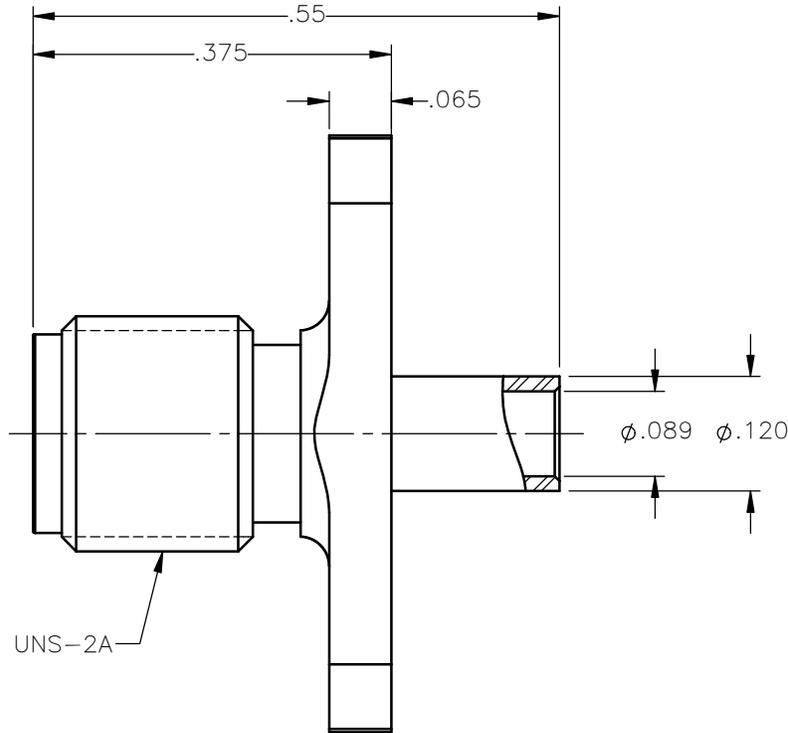

1/4-36 UNS-2A

NOTES:

MATERIALS:

1. BODY = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.

FINISHES:

1. BODY = GOLD PLATE PER ASTM B488-01, TYPE II, 30µin MIN, GRADE C, OVER 50 TO 100µin STRESS FREE NICKEL PER QQ-N-290.
2. CONTACT = GOLD PLATE PER ASTM B488-01, TYPE II, 50µin MIN, GRADE C, OVER 100 TO 200µin STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON

DWN:	DATE
D.N.	10/15/14
CHKD:	DATE
J.S.	10/15/14
APVD:	DATE
J.M.	10/15/14



Property of Radiall  
This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.



SMA STRAIGHT PANEL JACK  
2 HOLE FLANGE MOUNT  
DIRECT SOLDER  
FOR .085 S/R & SIMILAR CABLES

REFERENCE:

ORIGINATED: D.N.  
DATE: 10/15/14

MATERIALS & FINISHES:

SEE NOTES

SIZE	FSCM NO.	DWG NO.	REV
A	19505	9441-1583-010	A
SCALE 5:1		THIRD ANGLE PROJECTION	SHEET 1 OF 1

9441-1583-010