


Series
670

ENVIRONMENTAL SIZE 8 SOCKET QUADRAX CONTACT
CRIMP TYPE FOR MIL-DTL-38999 SERIE III CONNECTOR
Tensolite NF 26 Q 100 cable

Issue:
Feb. 20, 2015

Page
1/1

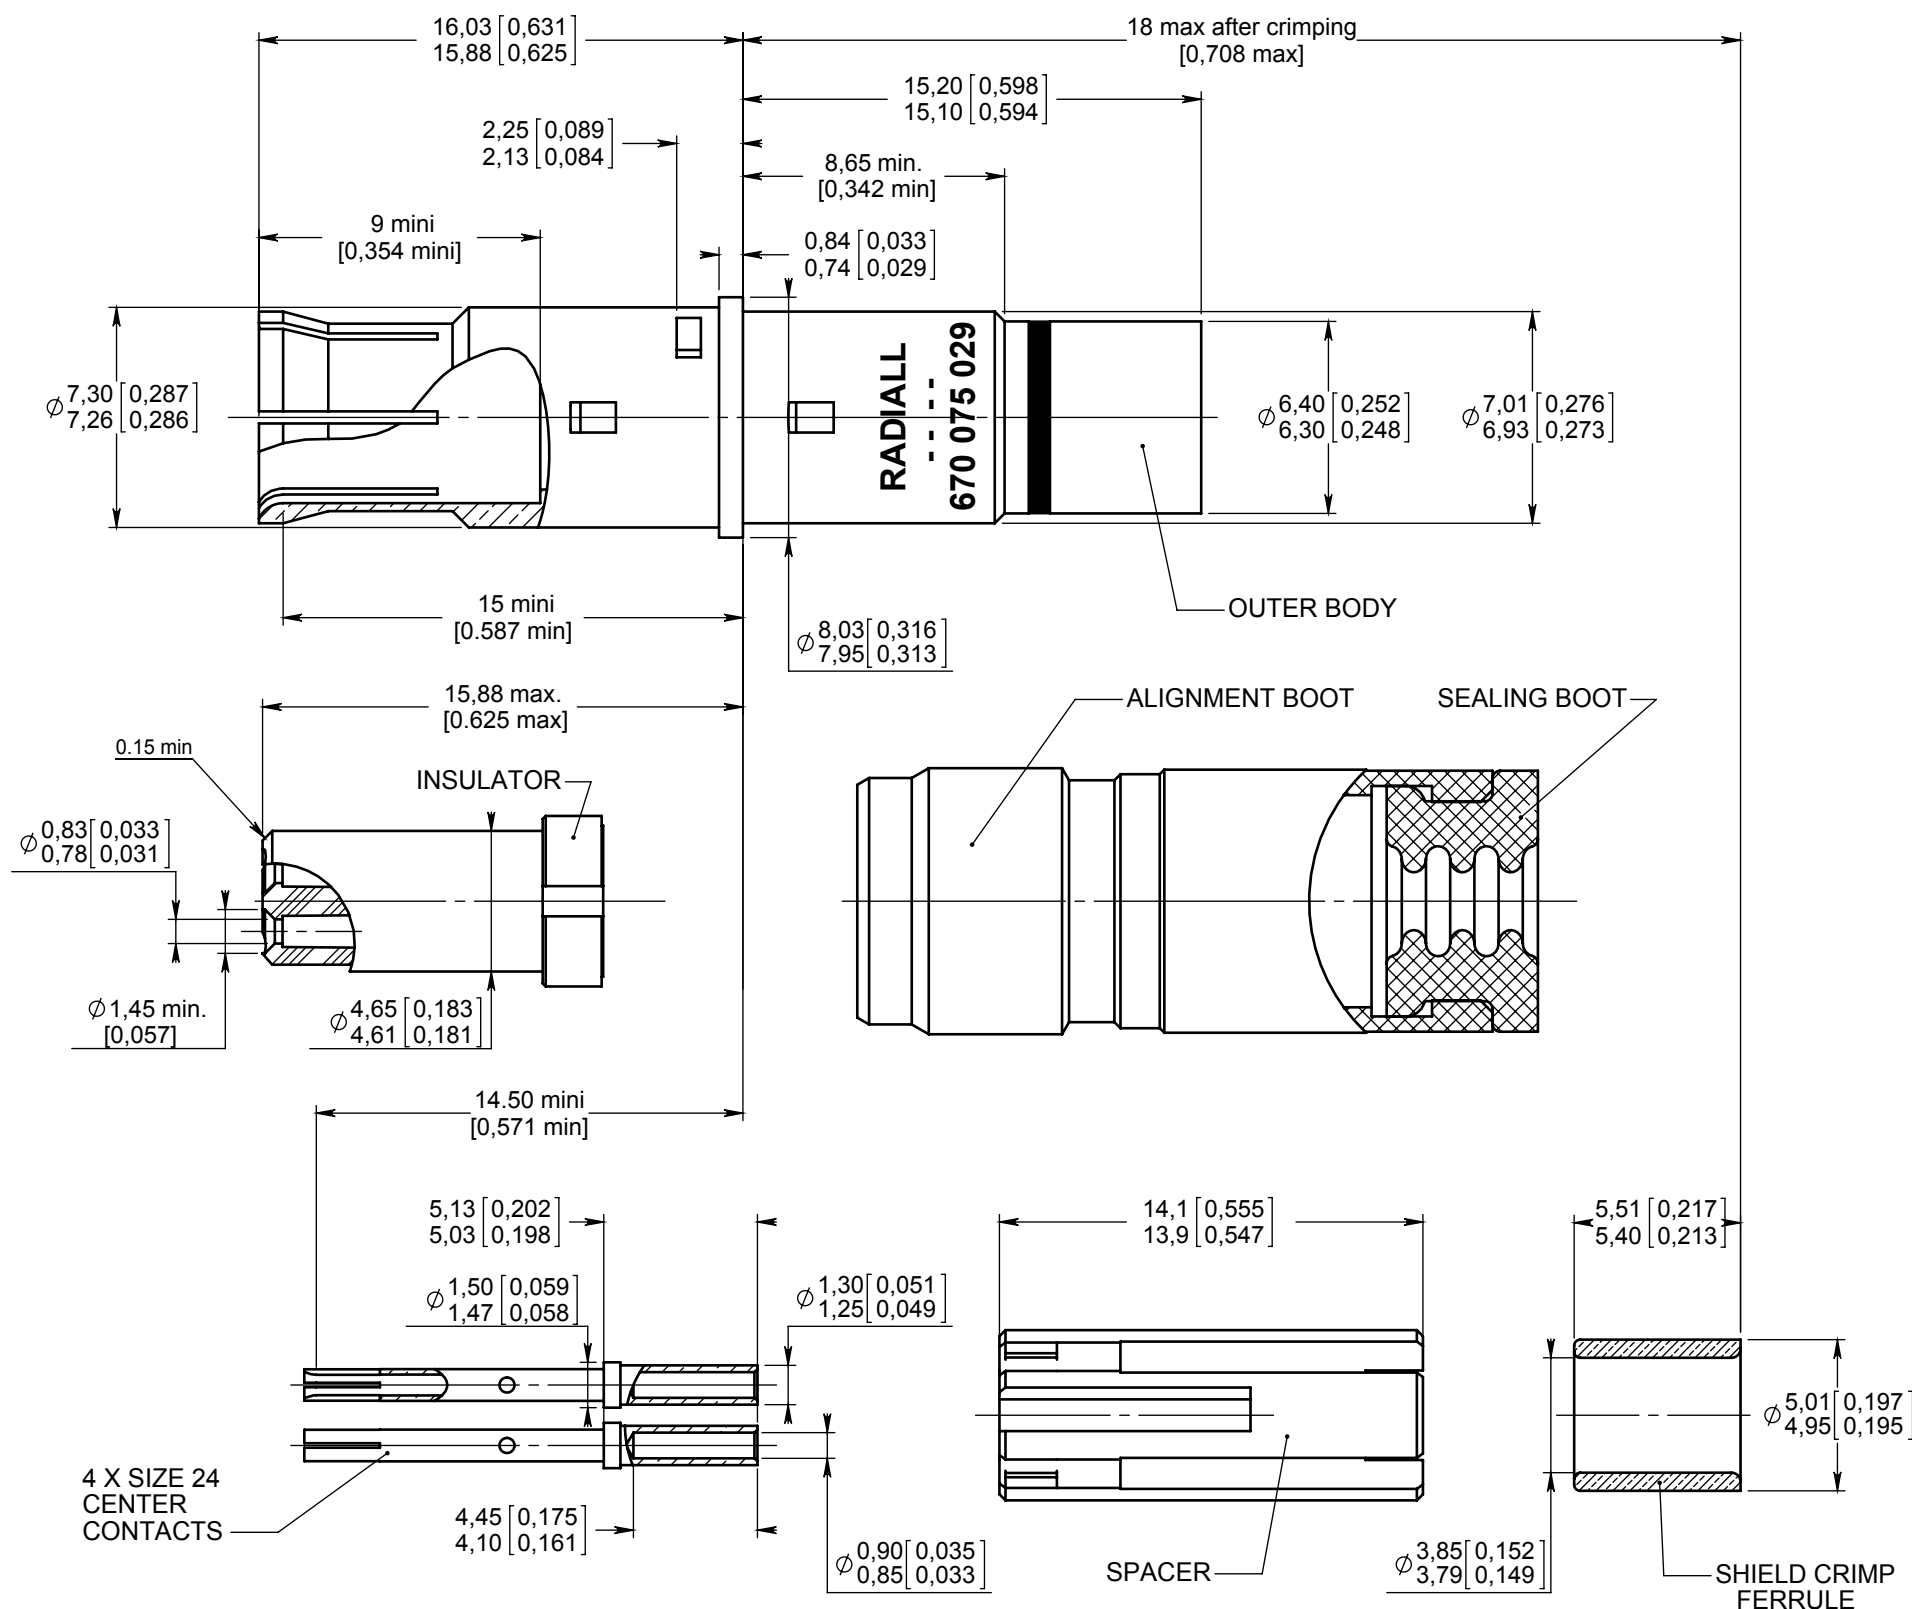

MATERIALS AND FINISHES:

- OUTER BODY AND CENTER CONTACTS: BERYLLIUM COPPER ALLOY PER ASTM B 196
- FERRULE : BRASS PER ASTM B 455
- INSULATOR : TEFLON PFA PER ASTM D 3307-00 OR ASTM D 1710
- SPACER : PEI ULTEM PER ASTM D 5205
- ALIGNMENT BOOT : PPS PER ASTM D 4067
- SEALING BOOT : FLUOROSILICON PER AMS R 25988

ALL METALLIC PARTS : GOLD PLATE PER SAE AMS 2422 , 50 MICROINCHES MINIMUM
OVER A NICKEL PLATE PER SAE AMS-QQ-N-290, CLASS 2
100 MICROINCHES MINIMUM


EXTRACTION TOOL: M 81969/28-03 or M81969/14-06 (RADIALL 282 549 001)

WIRING INSTRUCTIONS: SEE RP 58866

NOTE:

MATING INTERFACE AND OUTER DIMENSIONS COMPLIANT TO EN3155-075 STANDARD.

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 5,00 g

CREATION

PEN: N/A

NOM: Perrin H.

DATE: Feb. 20, 2015

APPR.:

Issue	Revisions	Name	Approved

670075029EN

RADIALL PROPRIETARY INFORMATION