




Series
38999

**SIZE 8 CRIMP COAX SOCKET CONTACT FOR MPA 61111 DXL CABLE
(TIMES LLSB-200 - M17/220-00001)**

Issue:
10/12/06

Page
1/1

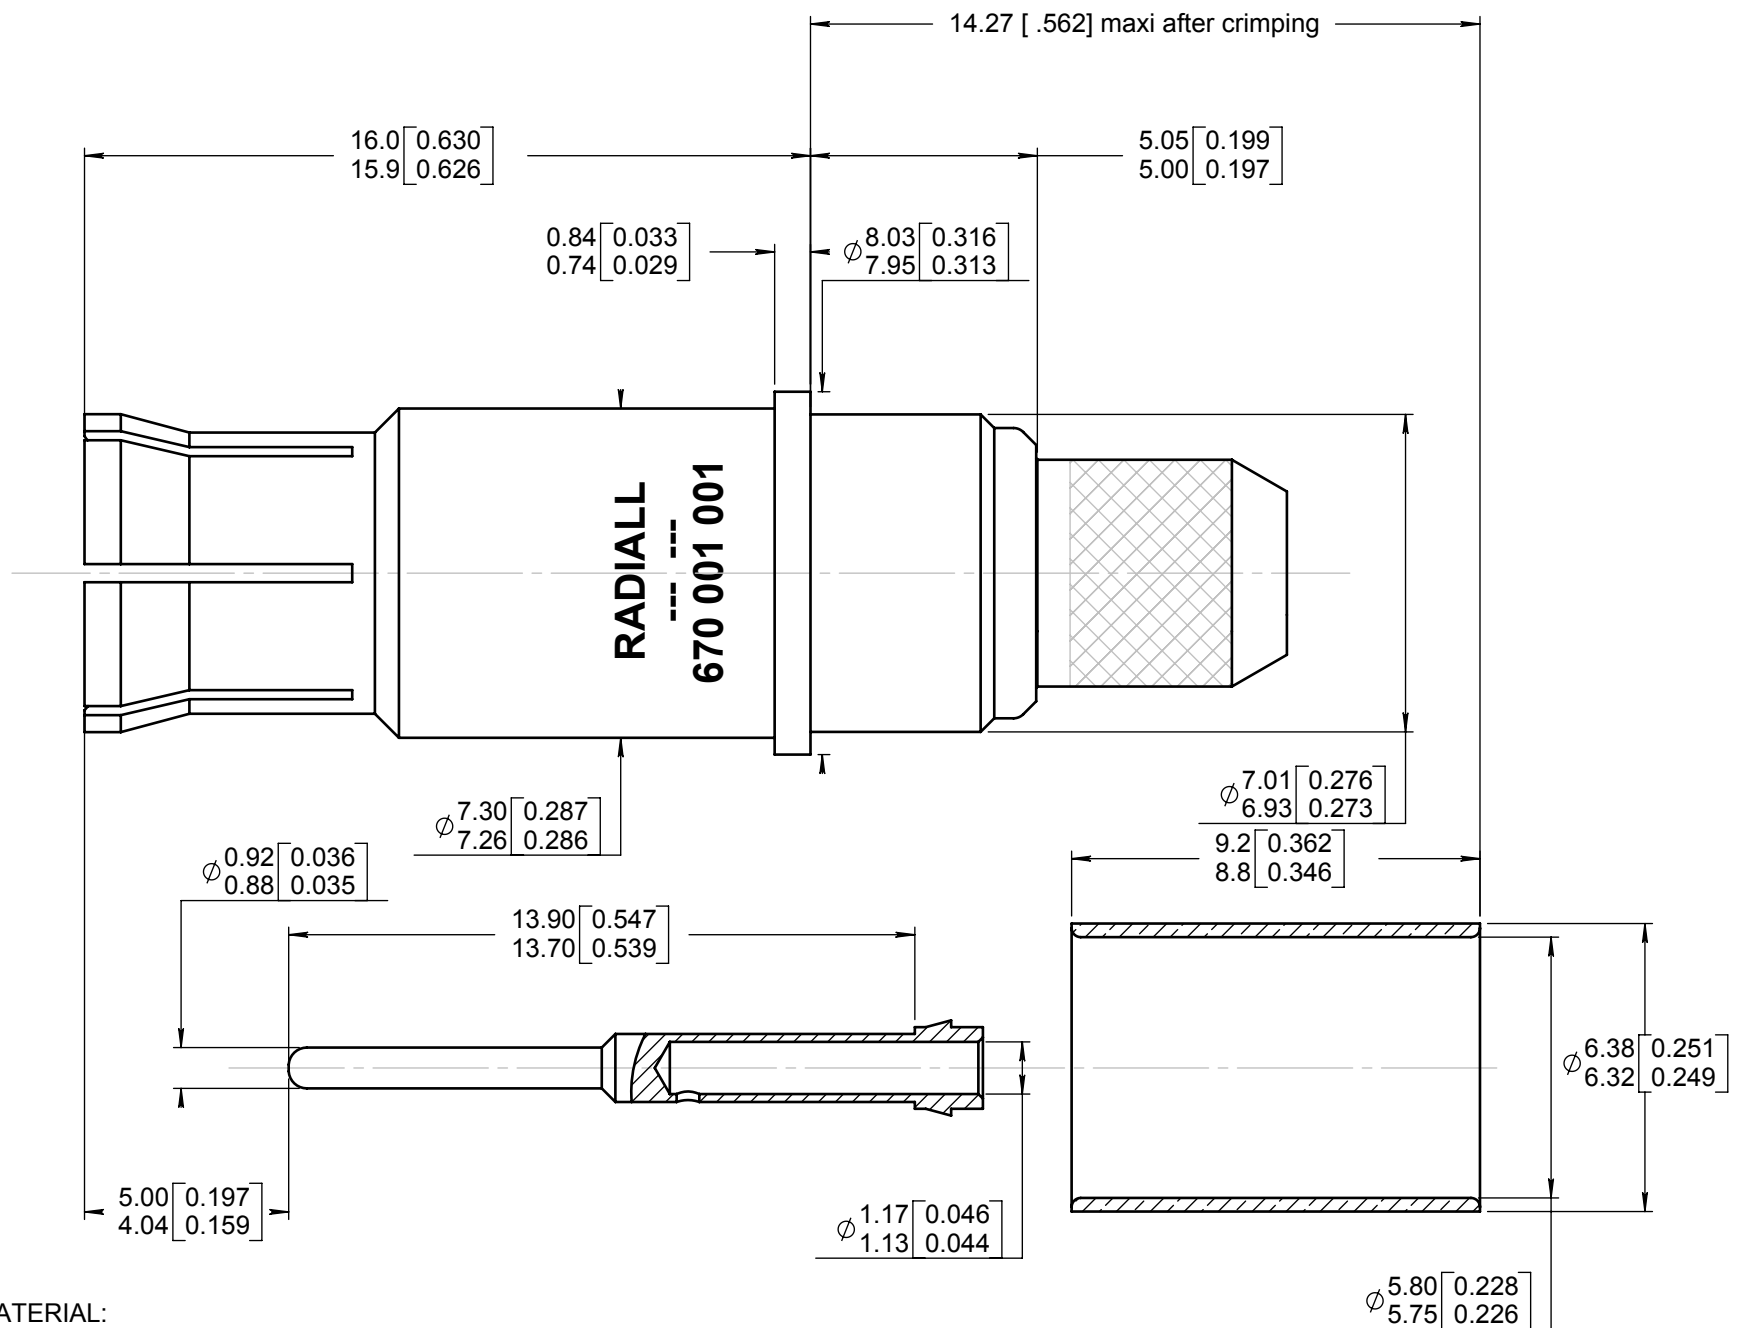

MATERIAL:

OUTER CONTACT : BERYLLIUM COPPER PER ASTM-B - 196
CENTER CONTACT AND FERRULE : BRASS PER QQ-B-626
DIELECTRIC : PTFE PER ASTM-D-1710 OR EQUIVALENT

FINISH :

ALL METAL PARTS : GOLD PER MIL-G-45204 TYPE I or II , GRADE C OR D , CLASS 1 OVER NICKEL PER QQ-N-290

DESIGN REQUIREMENTS

TEMPERATURE RANGE : -65C° , +125C°
IMPEDANCE : TBD
RATED VOLTAGE AT SEA LEVEL : TBD
DIELECTRIC WITHSTANDING VOLTAGE : TBD
FREQUENCY RANGE : TBD
VSWR : TBD

TOOLING :

CENTER CONTACT : CRIMPING TOOL : M22520/2-01 (RADIAL 282 281)
POSITIONER : 282 587 (DANIELS K1025S)

OUTER BODY : CRIMPING TOOL : M22520/5-01 (RADIAL 282 293)
DIE : M22520/5-45 HEX B 5.54 (.218) ON FLATS

WIRING INSTRUCTIONS : SEE MICT0100012

DIMENSIONS : mm (inch) -



CREATION				
PEN: M050106102B				
NOM: VAN DEN B.	10/12/06	Added Times and mil cable P/N	B VAN DEN	
DATE: 01/20/2006	07/09/06	670 001 001 was RP59412	P. BECAVIN	B. VAN DEN
APPR.: PERRIN H.	07/03/06	Updated center contact	B VAN DEN	/
	Issue	Revisions	Name	Approved

670001001

RADIAL PROPRIETARY INFORMATION