


Series

SIZE 8 CONCENTRIC PIN TWINAX CONTACT  
FOR EN 3375-004 AND EN 3375-005 CABLE

Issue:  
02/14/06

Page  
1/1

**OUTER AND INTERMEDIATE CONTACT SUB- ASSEMBLY**

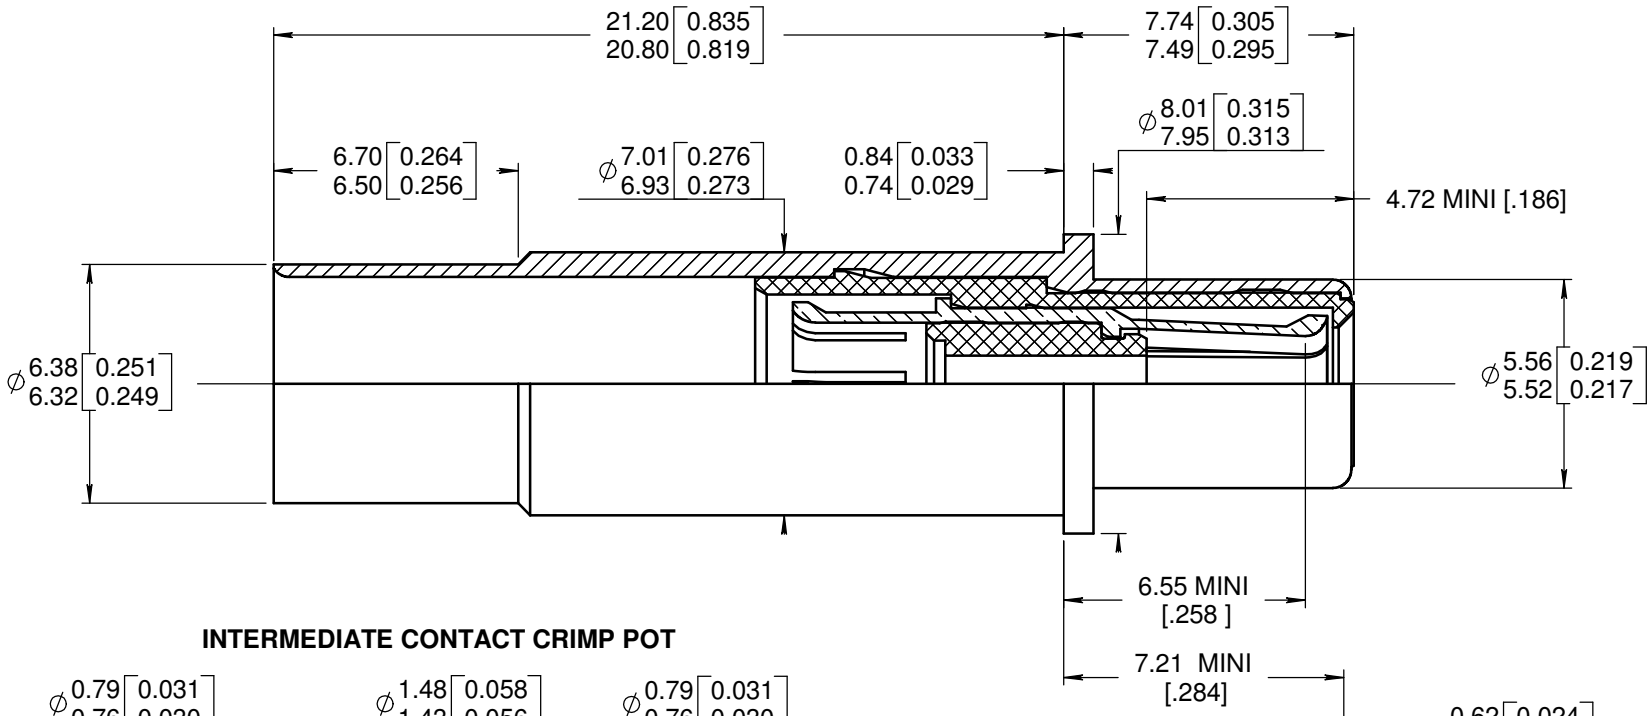

**INTERMEDIATE CONTACT CRIMP POT**

**CENTER CONTACT SUB-ASSEMBLY**

**ALIGNMENT BOOT**

**INNER FERRULE**

**DIELECTRIC SLEEVE**

**MATERIALS:**

- OUTER BODY AND INTERMEDIATE CONTACT : BERYLLIUM COPPER ALLOY PER ASTM-B-196
- CENTER CONTACT AND INTERMEDIATE CONTACT CRIMP POT : LEADED NICKEL COPPER ( C97)
- INNER FERRULE : BRASS PER QQ-B-626
- DIELECTRIC PARTS , DIELECTRIC SLEEVE AND ALIGNMENT BOOT : PTFE PER ASTM-D-1710 OR EQUIVALENT


**FINISHES:**

**ALL METALLIC PARTS :**

GOLD PLATED PER MIL-G-45204 ,TYPE I OR II , GRADE C OR D , CLASS 1 ( 50 MICROINCHES OVER NICKEL PER QQ-N-290 CLASS 2

WIRING INSTRUCTIONS : SEE RP 3364

DIMENSIONS : mm (inch) -



CREATION

PEN: M060009445A

NOM: VAN DEN B.

DATE: 02/01/2006

APPR.: PERRIN H.

02/14/06

691 800 071 was RP 59469

B VAN DEN

/

Issue

Revisions

Name

Approved

691800071EN

RADIAL PROPRIETARY INFORMATION

Confidential information not to be disclosed to third parties without Radiall approval  
This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112\_9311