




Series

SIZE 8 CRIMP COAX PIN CONTACT
RG 400 CABLE
FOR EN 3545 CONNECTOR

Issue:
AUGUST 30-02

Page
1 / 1

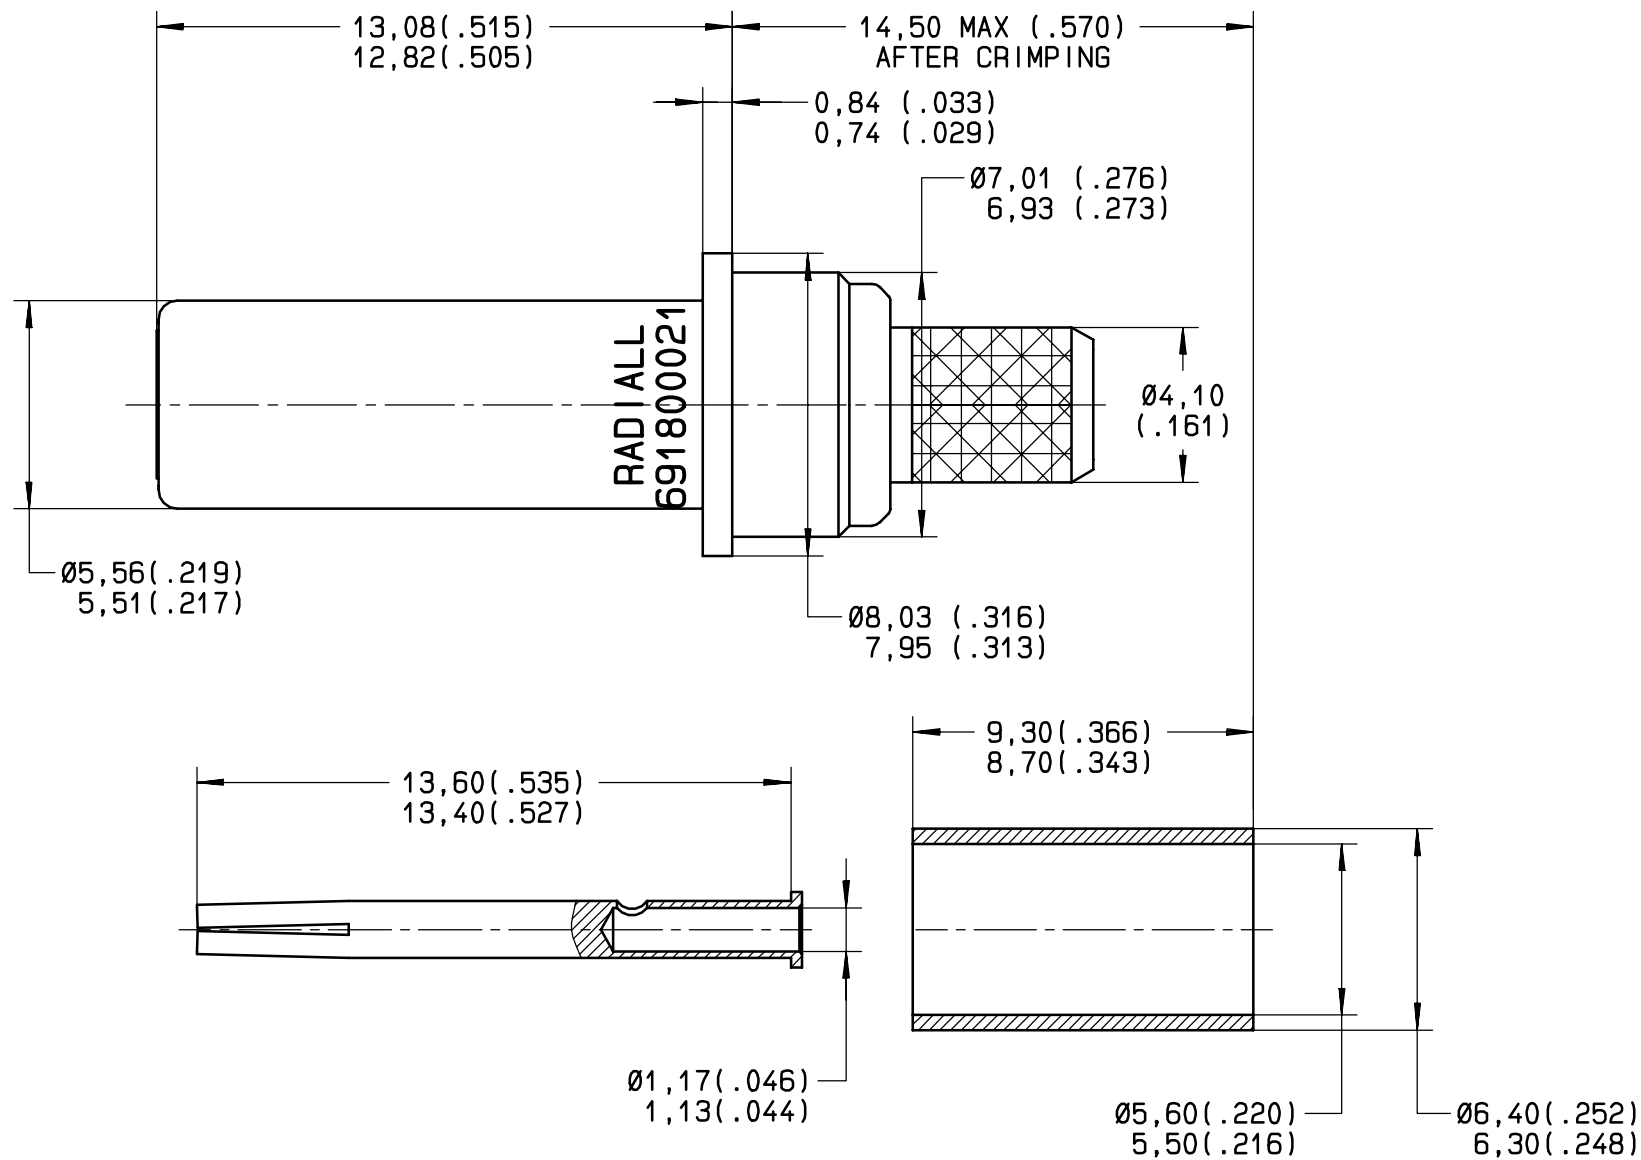

MATERIAL:

OUTER CONTACT: BRASS PER QQ-B-626
CENTER CONTACT: BERYLLIUM COPPER PER ASTM-B-196
FERRULE: BRASS PER QQ-B-626
DIELECTRIC: PTFE PER ASTM-D-1710 OR EQUIVALENT

FINISH:

ALL METAL PARTS: GOLD PER MIL-G-45204 TYPE I OR II, GRADE C OR D, CLASS 1 OVER NICKEL PER QQ-N-290

DESIGN REQUIREMENT

TEMPERATURE RANGE: -65°C +200°C
IMPEDANCE: 50Ω NOMINAL
RATED VOLTAGE AT SEA LEVEL: 325 V RMS AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTAGE: 750 V RMS AT SEA LEVEL
FREQUENCY RANGE: 0 TO 500MHz
VSWR: 1.10/1 AT 0 TO 300MHz
VSWR: 1.30/1 AT 300 TO 500MHz

TOOLING:

CENTER CONTACT: CRIMPING TOOL M22520/2-01 (RADIAL 282281)

POSITIONER 282587 (DANIELS K1025-S)

FERRULE: CRIMPING TOOL M22520/5-01 (RADIAL 282293)

DIE M22520/5-05 (RADIAL 282246)

HEX A 5,40 (.213) / FLATS

EXTRACTION TOOL: M81969/28-03 (RADIAL 282549001)

WIRING INSTRUCTIONS: SEE RP55588

CREATION
PEN: M020400064A
NOM: B VAN DEN
DATE: AUG.30-02
APPR.:
Issue	Revisions		Name	Approved

691800021

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112-9610