




Series  
DSX

SIZE 1 SOCKET COAX FOR ASN-E0406 WD CABLE  
AND SHF 8LI CABLE

Issue:  
FEB 23, 2005

Page  
1/1

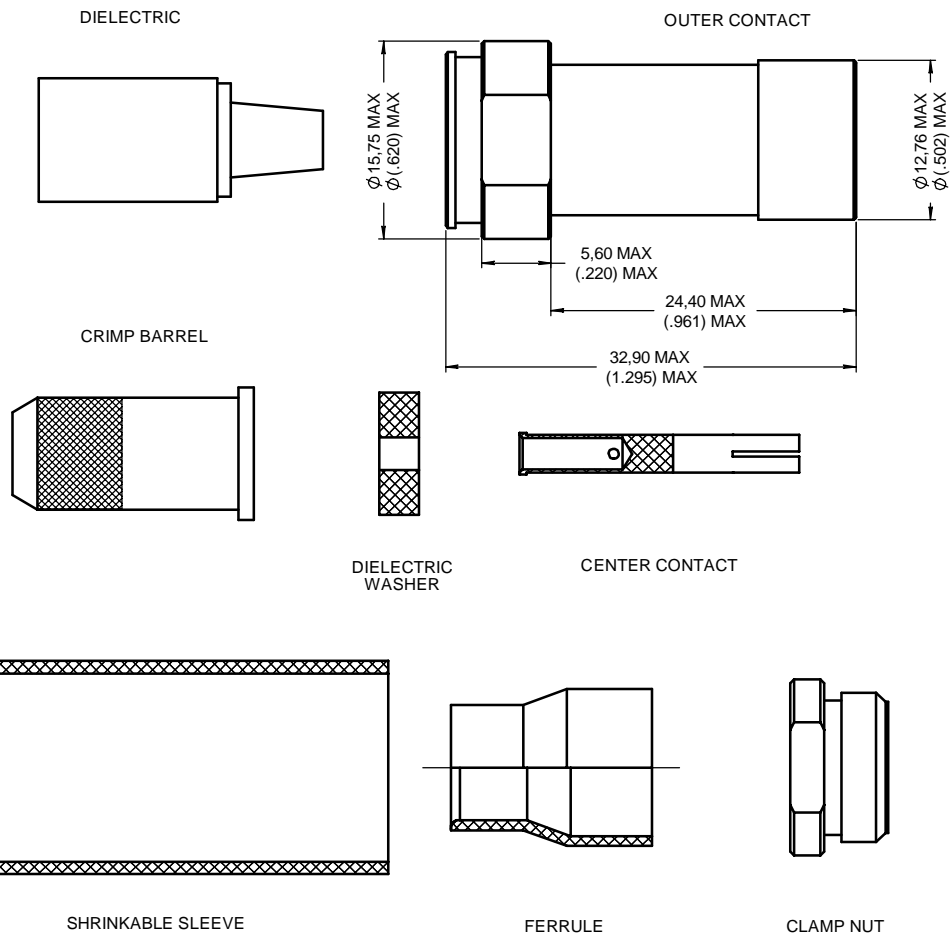

**WIRING INSTRUCTION AND CRIMPING TOOL**  
**SEA DRAWING RP 54616**

**MATERIAL:**

OUTER CONTACT, CLAMP NUT: BRASS PER ASTM-B-455 OR EQUIVALENT  
DIELECTRIC, DIELECTRIC WASHER: PTFE PER ASTM-D-1710 OR EQUIVALENT  
CENTER CONTACT: BERYLIUM COPPER PER ASTM-B-196  
FERRULE, CRIMP BARREL: BRASS PER ASTM-B-453/B453M OR EQUIVALENT  
SPRING: STAINLESS STEEL PER SAE-AMS 5688  
CLIP: STEEL NICKEL PLATED


**FINISH:**

ALL METALLIC PARTS: PLATING .00005 OF GOLD PER MIL-G-45204,  
TYPE I OR II, GRADE C OR D, CLASS 1 OVER PER QQ-N-290

**ELECTRICAL CHARACTERISTICS:**

IMPEDANCE: 50 OHMS  
VSWR: 1,3 FROM 10 MHz TO 5 GHz  
DIELECTRIC WITHSTANDING VOLTAGE: 1500 V

DIMENSIONS : mm (inch) -



CREATION				
PEN: M990001404A				
NOM: GOMBERT B.				
DATE: 7 JAN 99				
APPR.: G. JACOB	02/23/05	UPDATED WITH NEW SHF-8LI CABLE	MONDOT	GOMBERT
	Issue	Revisions	Name	Approved

616106001EN