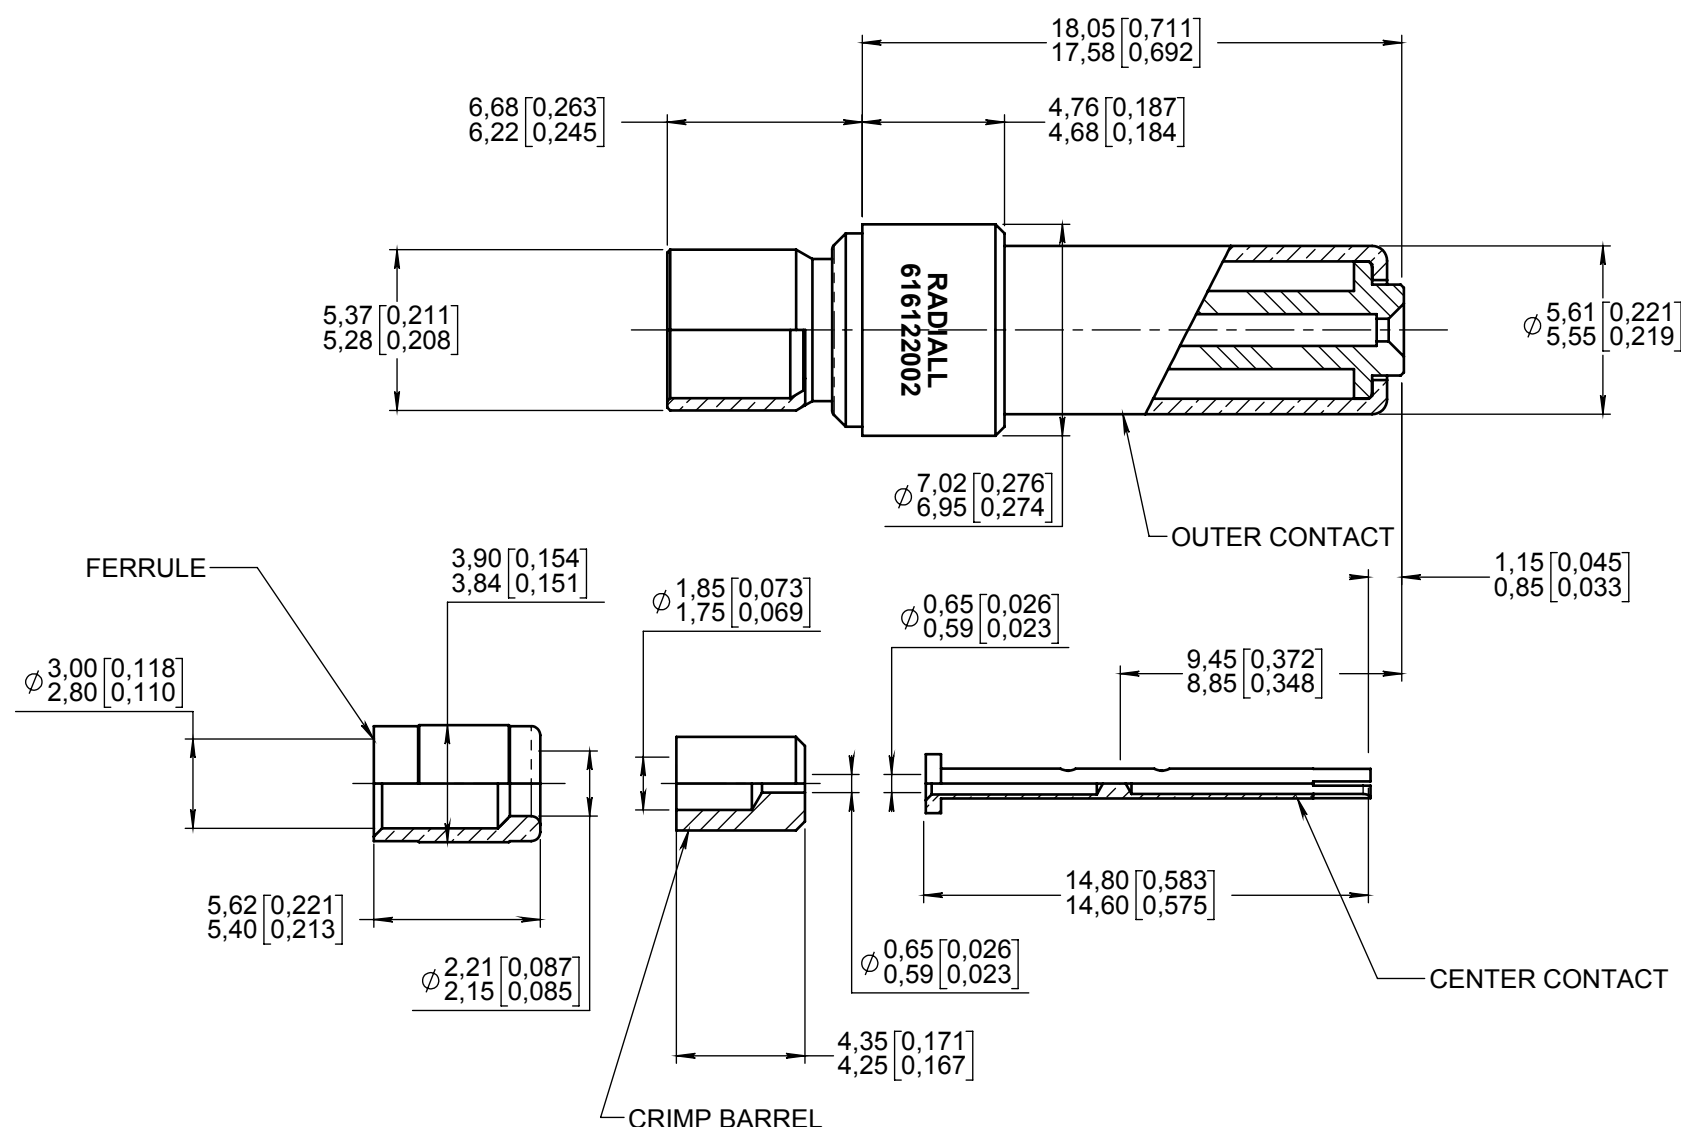


Series
DSXNON-ENVIRONMENTAL SIZE 5 CRIMP COAXIAL PIN CONTACT
FOR RG179 CABLE (75 Ohms)Issue:
Nov. 18, 2020Page
1/1**MATERIAL :**


- OUTER CONTACT : BRASS PER ASTM B 16 OR ASTM B 453 OR EN 12164
- INSULATOR : PTFE PER ASTM-D-1710 OR EQUIVALENT
- CENTER CONTACT : BERYLLIUM COPPER PER ASTM-B-196
- FERRULE: BRASS PER ASTM B 16 OR ASTM B 453 OR EN 12164
- CRIMP BARREL: BRASS PER ASTM B 16 OR ASTM B 453 OR EN 12164

FINISH :

- ALL METALIC PARTS: .00005 OF GOLD PER SAE AMS-2422 OVER NICKEL PER AMS 2403

DESIGN REQUIREMENTS :

- TEMPERATURE RANGE: -65°C to +125°C
- MPEDANCE : 75 OHMS NOMINALE
- DIELECTRIC WITHSTANDING VOLTAGE: 750 V rms AT SEA LEVEL
- VSWR: 1.3 from DC TO 1500 MHz

EXTRACTION TOOL : RADIAL 282946 (M81659/28-01) (MUST BE ORDER SEPARATLY)**WIRING INSTRUCTIONS PER :** RP7575**DIMENSIONS :** mm (inch are given for information only)

Estimated weight : 3.20 g

CREATION

PEN: 20188356-40

NOM: MOUTAULT W.

DATE: July. 08, 2020

APPR.:BRANJONNEAU V.

Nov. 18, 20

Insulator and central contact changed

Revisions

Moutault W.

Name

Legendre T.

Approved

**PRODUCT
NOT QUALIFIED**

616122003EN

RADIAL PROPRIETARY INFORMATION