


Series
DSX

ENVIRONMENTAL SIZE 5 CRIMP COAXIAL PIN CONTACT
FOR BELDEN 1855A CABLE

Issue:
Jan. 24, 2025

Page
1/1

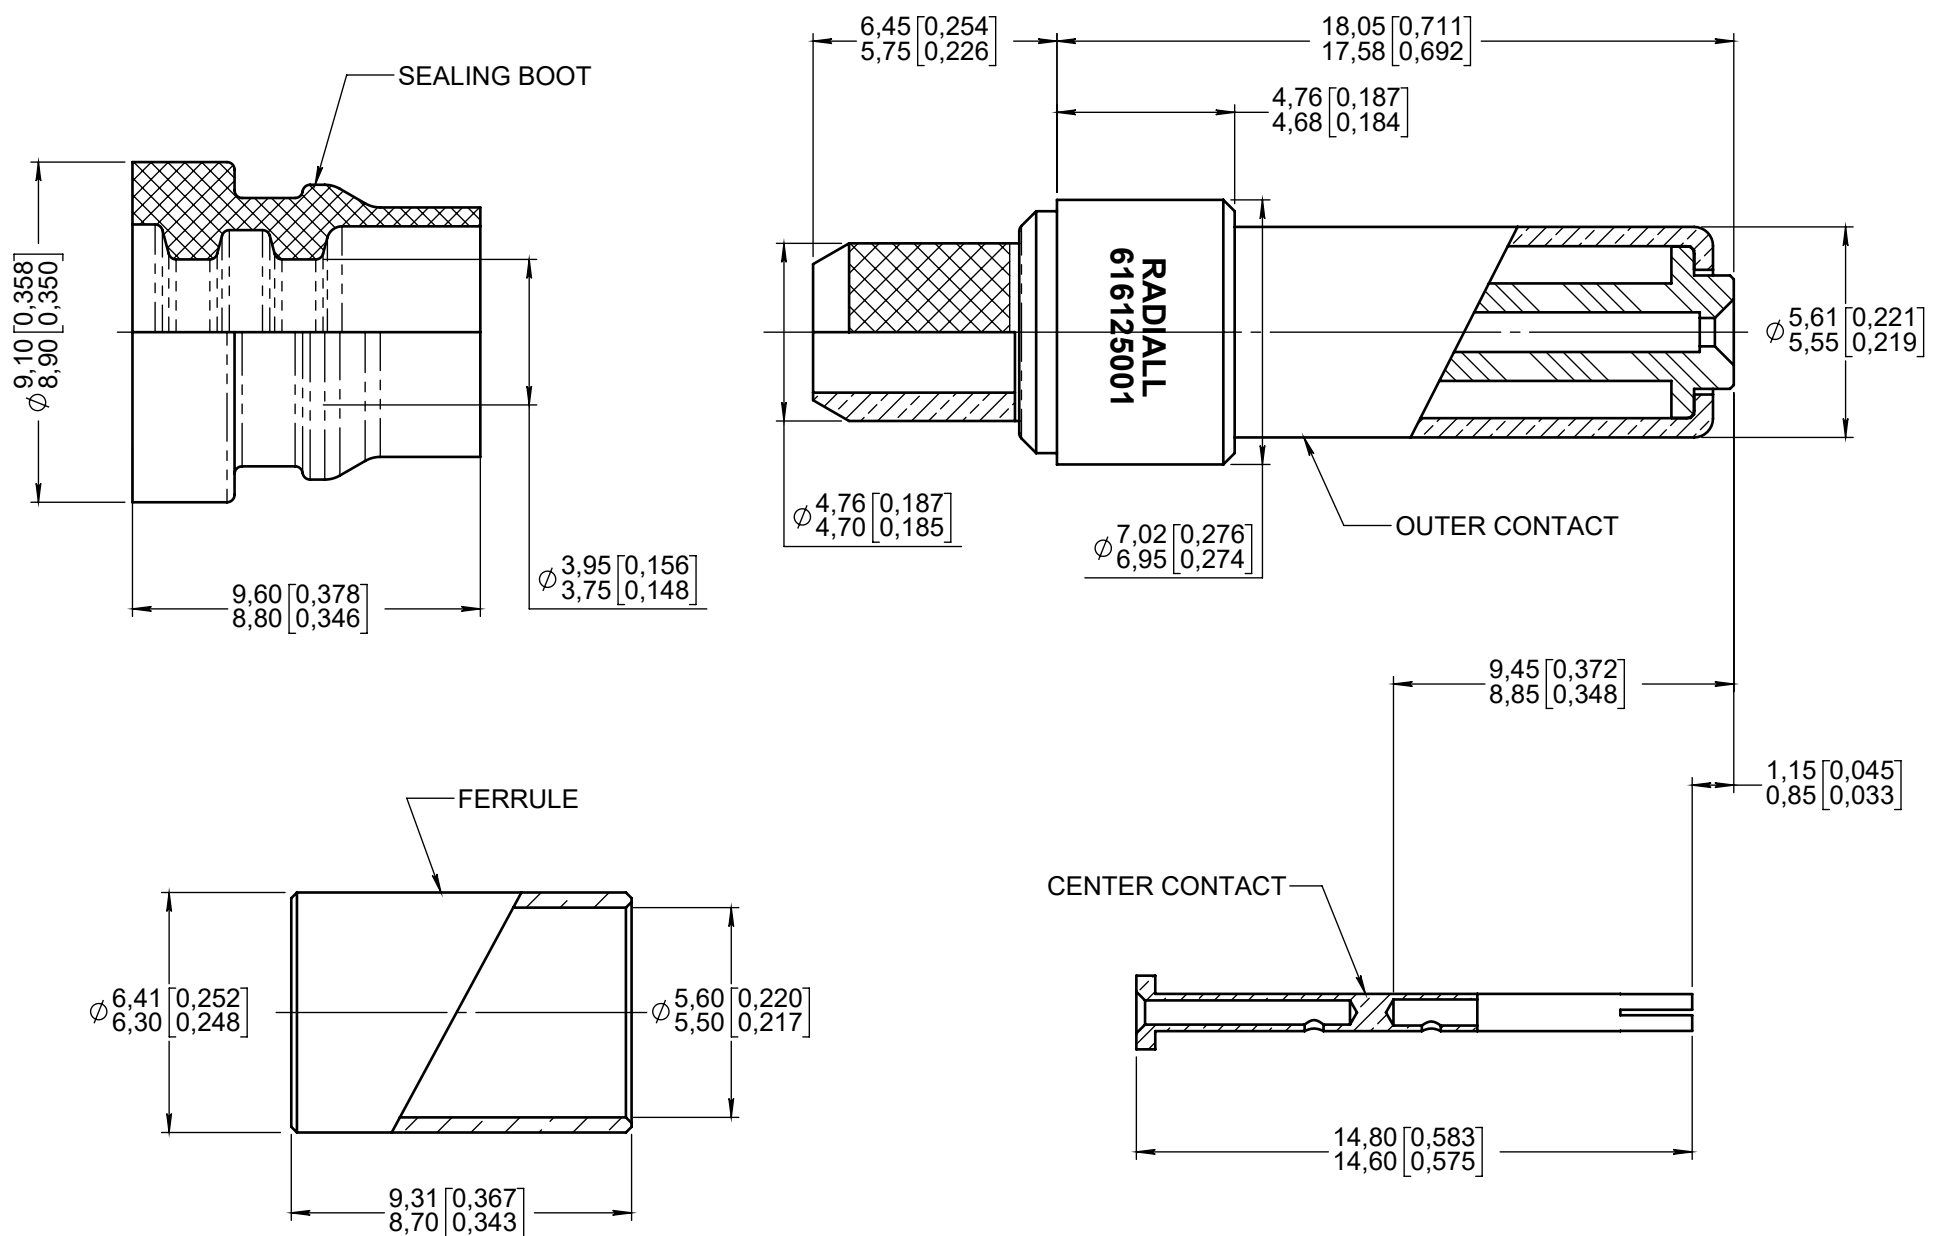

MATERIAL :

OUTER CONTACT : COPPER ALLOY
INSULATOR : PTFE OR EQUIVALENT
CENTER CONTACT : COPPER ALLOY
FERRULE: COPPER ALLOY
CRIMP BARREL: COPPER ALLOY
SEALING BOOT: FLUOROSILICONE

FINISH :

ALL METALIC PARTS: .00005 OF GOLD OVER NICKEL


DESIGN REQUIREMENTS :

TEMPERATURE RANGE: -65°C to +125°C
IMPEDANCE : 75 OHMS NOMINAL
DIELECTRIC WITHSTANDING VOLTAGE: 750 V rms AT SEA LEVEL
VSWR: 1.3 from DC TO 1.5 GHz

EXTRACTION TOOL : RADIAL 282946 (M81659/28-01) (MUST BE ORDER SEPARATLY)

WIRING INSTRUCTIONS PER : MICT0100048

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 3.80 g

CREATION PEN: 20165021-40 NOM: MOUTAULT W. DATE: July 25, 2016 APPR.: LEGENDRE T.				
	Jan. 24, 25	Crimp barrel modified	Legeay	Legendre
	Sept. 26, 17	Mounting instruction number added	Moutault	Legendre
	July. 25, 16	Was RP68614	Moutault	Legendre
	Issue	Revisions	Name	Approved

616125001EN

RADIAL PROPRIETARY INFORMATION