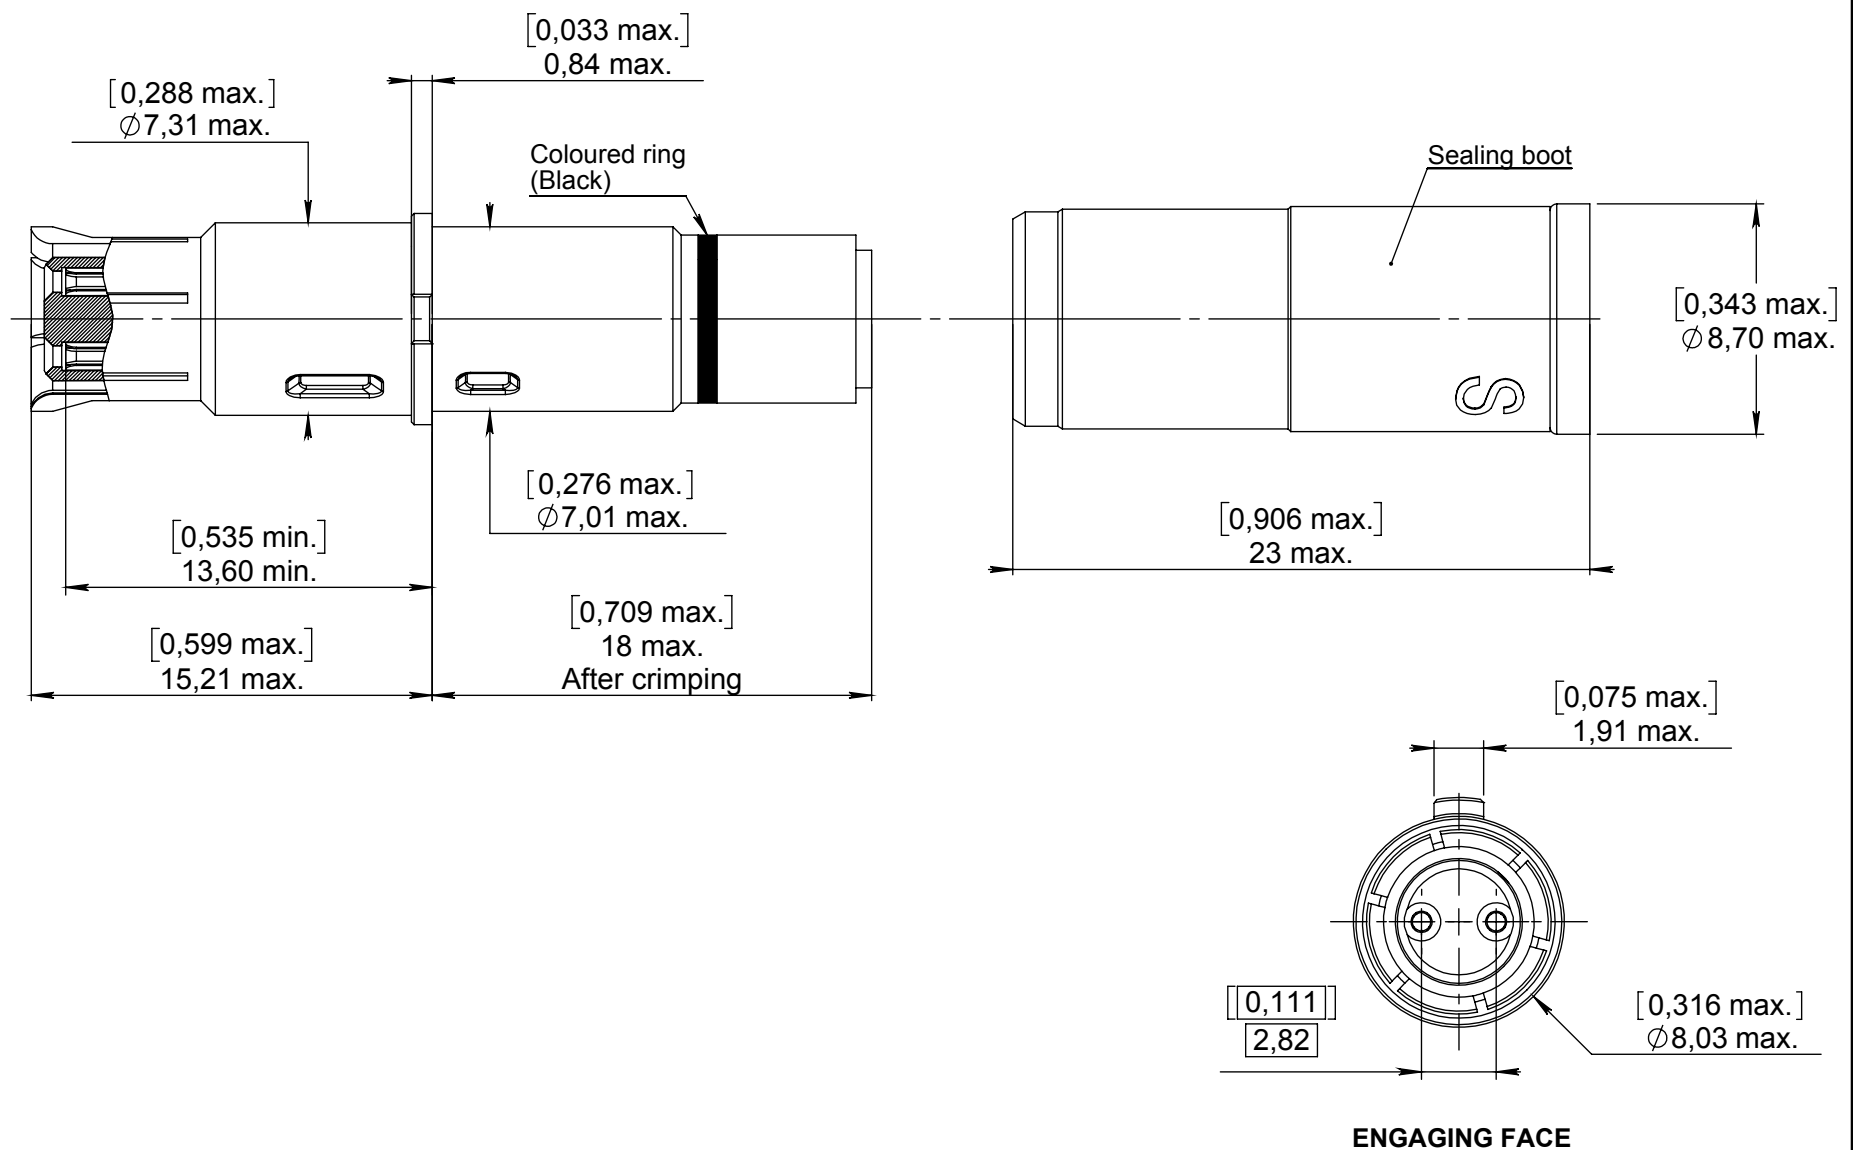


Series  
EPXB

ENVIRONMENTAL SIZE 8 TWINAX SOCKET CONTACT

Issue:  
Dec. 17, 2018Page  
1/1**MATERIALS:**

- Outer, center contact and crimping ferrule: Copper alloy.
- Insulator: PTFE or equivalent.
- Spacer: Thermoplastic.
- Sealing boot: Thermoplastic, Fluorosilicone elastomer.

**FINISHES:**

- Outer, center contacts and crimping ferrule: Gold over nickel plated.
- Insulator, spacer and sealing boot: Non applicable.


**NOTES:**

- Extraction tool: M81969/28.03 (RADIALl P/N 282549001) or M81969/14-05.
- Contact delivered un-assembled.
- Wiring instruction according to RP56870.

**CABLES:**

- NEXANS (FILOTEx) P/N: ABS 0386 WF / ET96897.
- DRAKA-FILECA P/N: F 2703-37.
- RAYCHEM P/N: 1726A1424.

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 4,89 g

**CREATION**

PEN: M03 0104 259B

NOM: Perrin H.

DATE: July 20 2004

APPR.: LAHOREAU C.

Issue	Revisions	Name	Approved
Dec. 17, 18	Estimated weight added, contact body updated	Weihs H.	López C.
Mar. 09, 09	"RAYCHEM: 1726A1424" cable added	Malty S.	Pessard M.

617065011EN

RADIALl PROPRIETARY INFORMATION