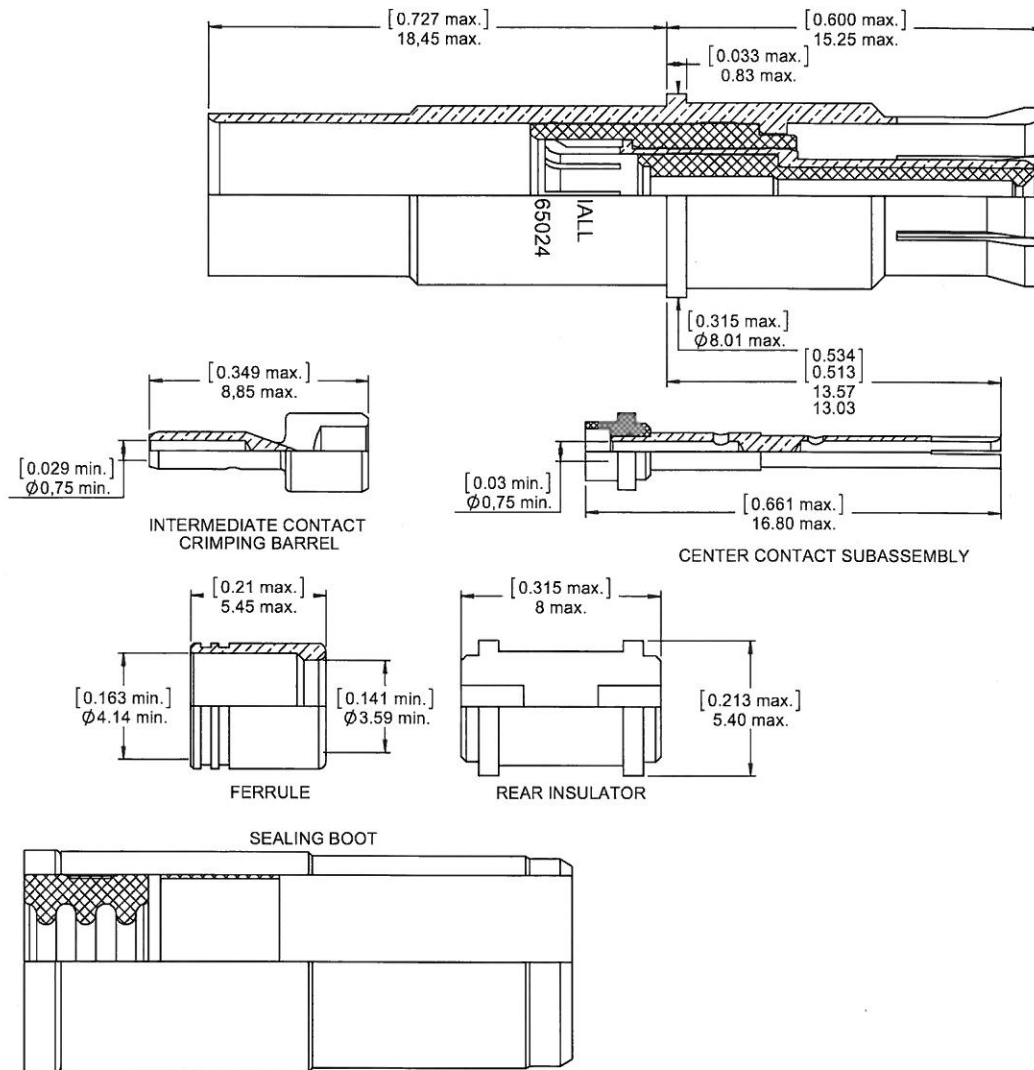


**OUTER CONTACT SUB ASSEMBLY
(SOCKET BODY CONTACT WITH PIN INTERMEDIATE CONTACT)**

MATERIALS & FINISHES:

- OUTER, INTERMEDIATE & CENTER CONTACT : Beryllium copper or Copper alloy, Gold over Nickel plated,
- FERRULE : Brass, Gold over Nickel plated,
- DIELECTRIC PARTS & DIELECTRIC SLEEVE : PTFE or equivalent,
- SEALING BOOT : Thermoplastic + fluorosilicone elastomer.

SEE WIRING INSTRUCTIONS : RP 3364
EXTRACTION TOOL: M81969/28-03 (RADIAL 282 549 001)
LABELED:

RADIALl DATE CODE
Code OTAN : F0987
617065024

DIMENSIONS : mm (inch are given for information only)


Estimated weight : 5.5 g

| | | | | |
|----------------------|-------------|--|------------|------------|
| CREATION | | | | |
| PEN: 1012379-2088 | | | | |
| NOM: PAILLOT N. | | | | |
| DATE: March 27, 2013 | Aug. 08, 13 | Added marking and labeled | Ramos D. | Pessard M. |
| APPR.: LE GLOAHEC Y | June 27, 13 | Part denomination updated to be in accordance with Mounting Instruction RP 33644 | Paillet N. | Pessard M. |
| | Issue | Revisions | Name | Approved |

RADIALl Engineering Approval:

T. PESSARD Aug 8th 2013