


Series
EPXB

SIZE 8 TWINAX SOCKET CONTACT
ENVIRONMENTAL APPLICATION
FOR CHEMINAX 2524B0524 CABLE

Issue:
Apr 17, 2014

Page
1/1

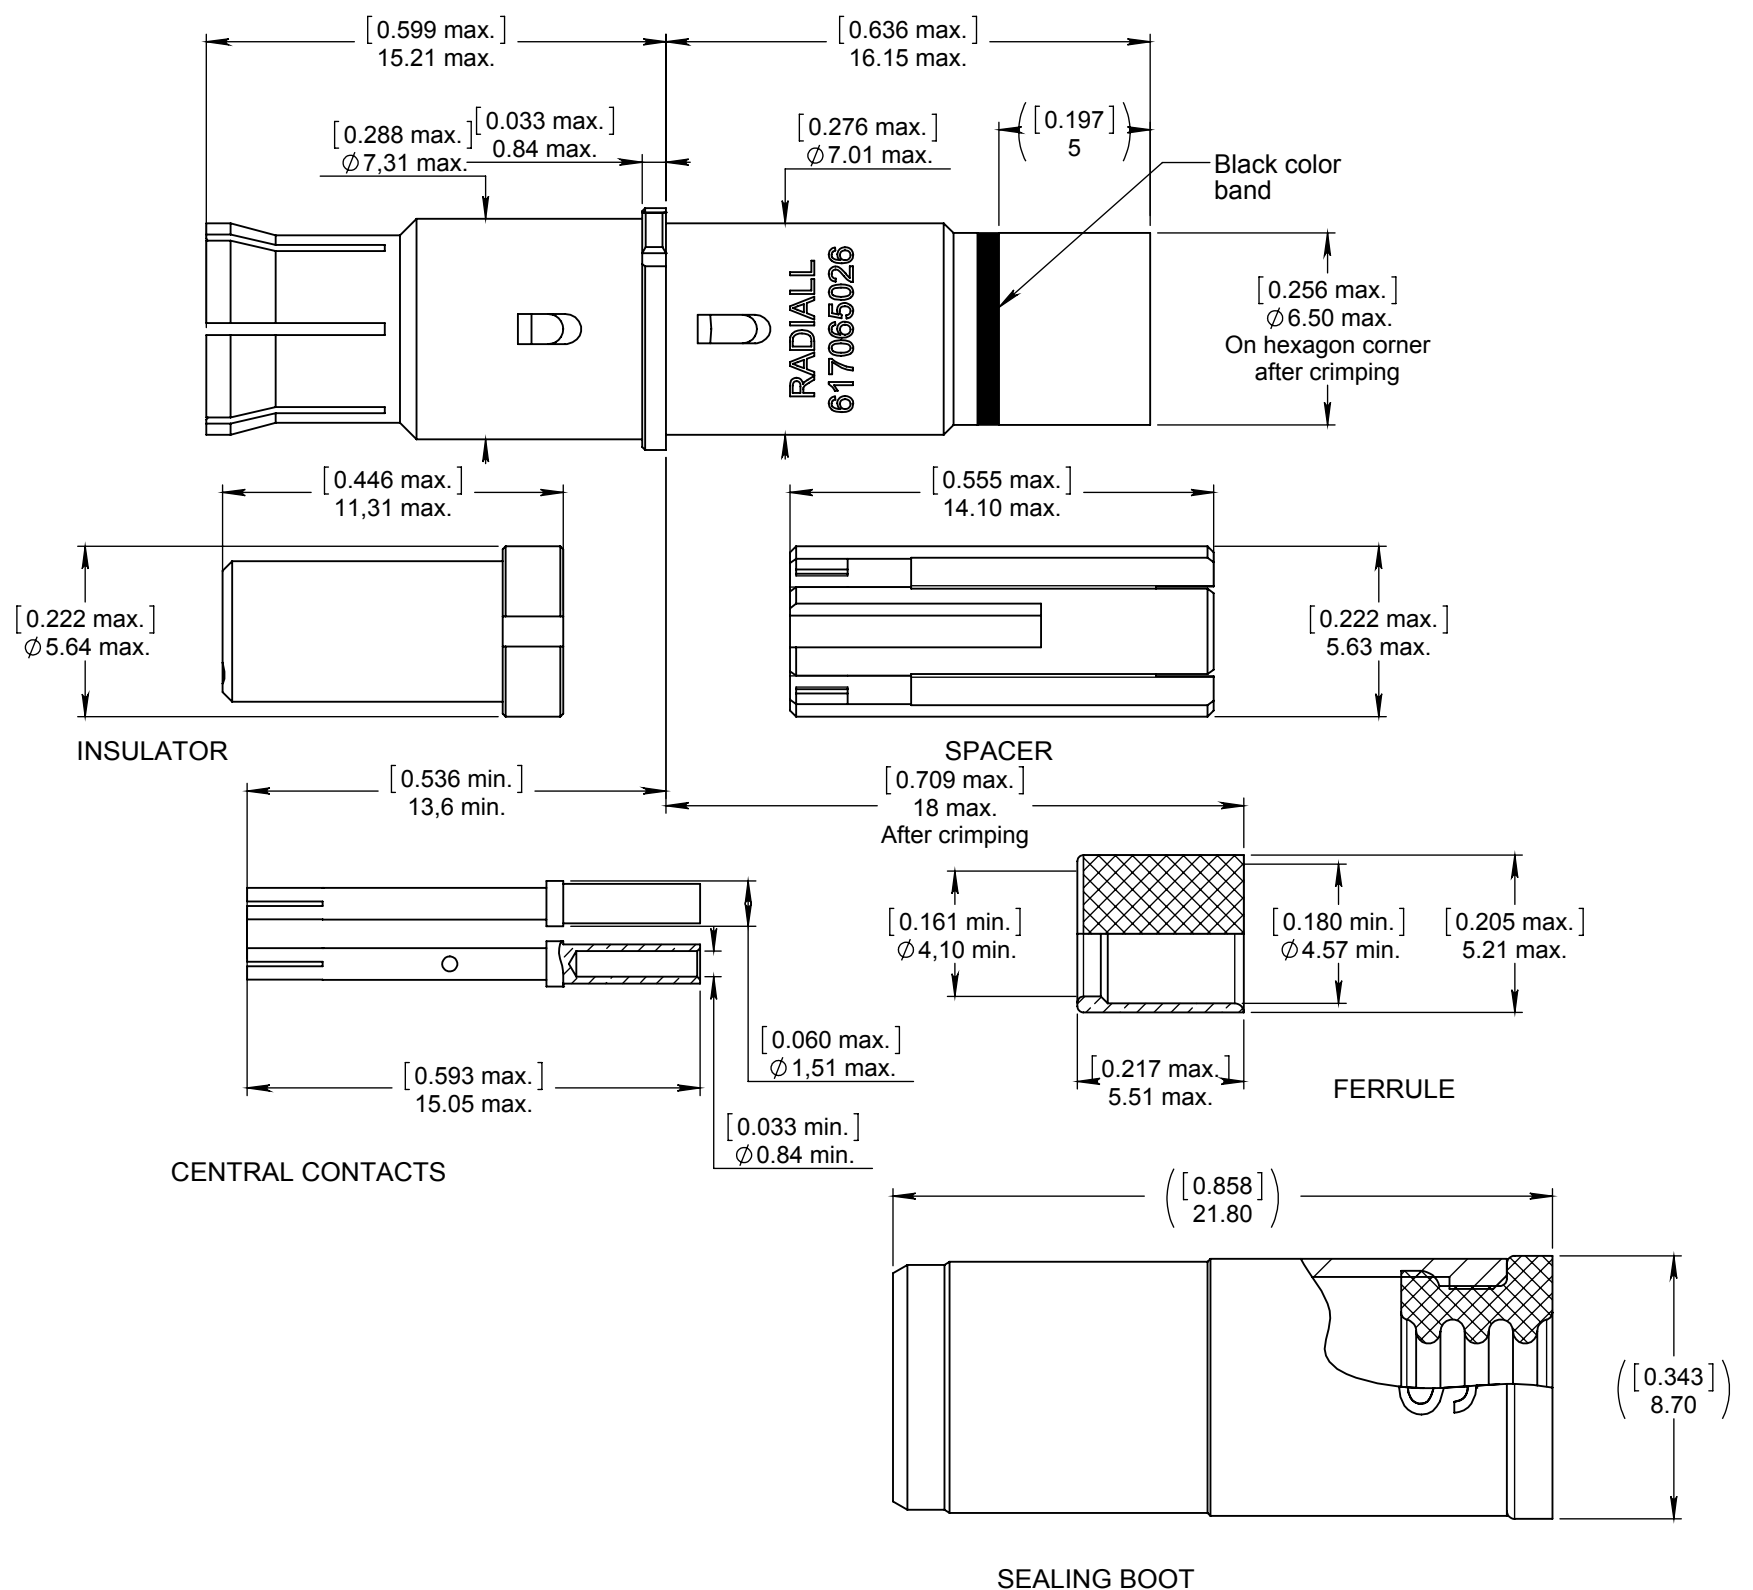

MATERIALS:


- Outer, center contact & crimping ferrule: Copper alloy.
- Insulator, spacer : PTFE or equivalent.
- Sealing boots :
 - Centering boot : High grade thermoplastic,
 - Soft boot : Fluorosilicone elastomer

FINISHES:


- Outer, center contacts and crimping ferrule: Gold over nickel plated.
- Insulator, spacer & sealing boots : Non applicable.

NOTES:

- Extraction tool: RADIAL P/N 282549001,
- Wiring instruction : RP56870

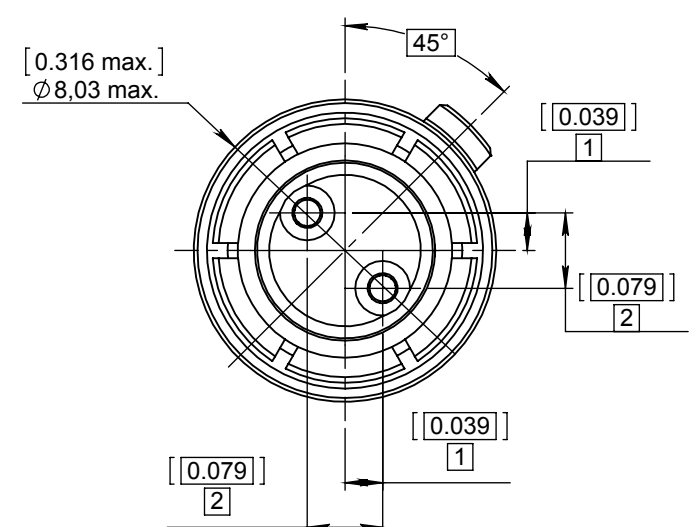

DIMENSIONS : mm (inch are given for information only)



ENGAGING FACE
(view without boots)

Estimated weight : 4.05 g

CREATION				
PEN: 20130441				
NOM: PAILOT N.				
DATE: Dec 16, 2013				
APPR.: LE GLOAHEC Y.	Apr 17, 14	Outer body & ferrule modified & note "qualification in progress" removed.	Pailot N.	Legloahec Y.
	Issue	Revisions	Name	Approved

617065026EN

RADIAL PROPRIETARY INFORMATION