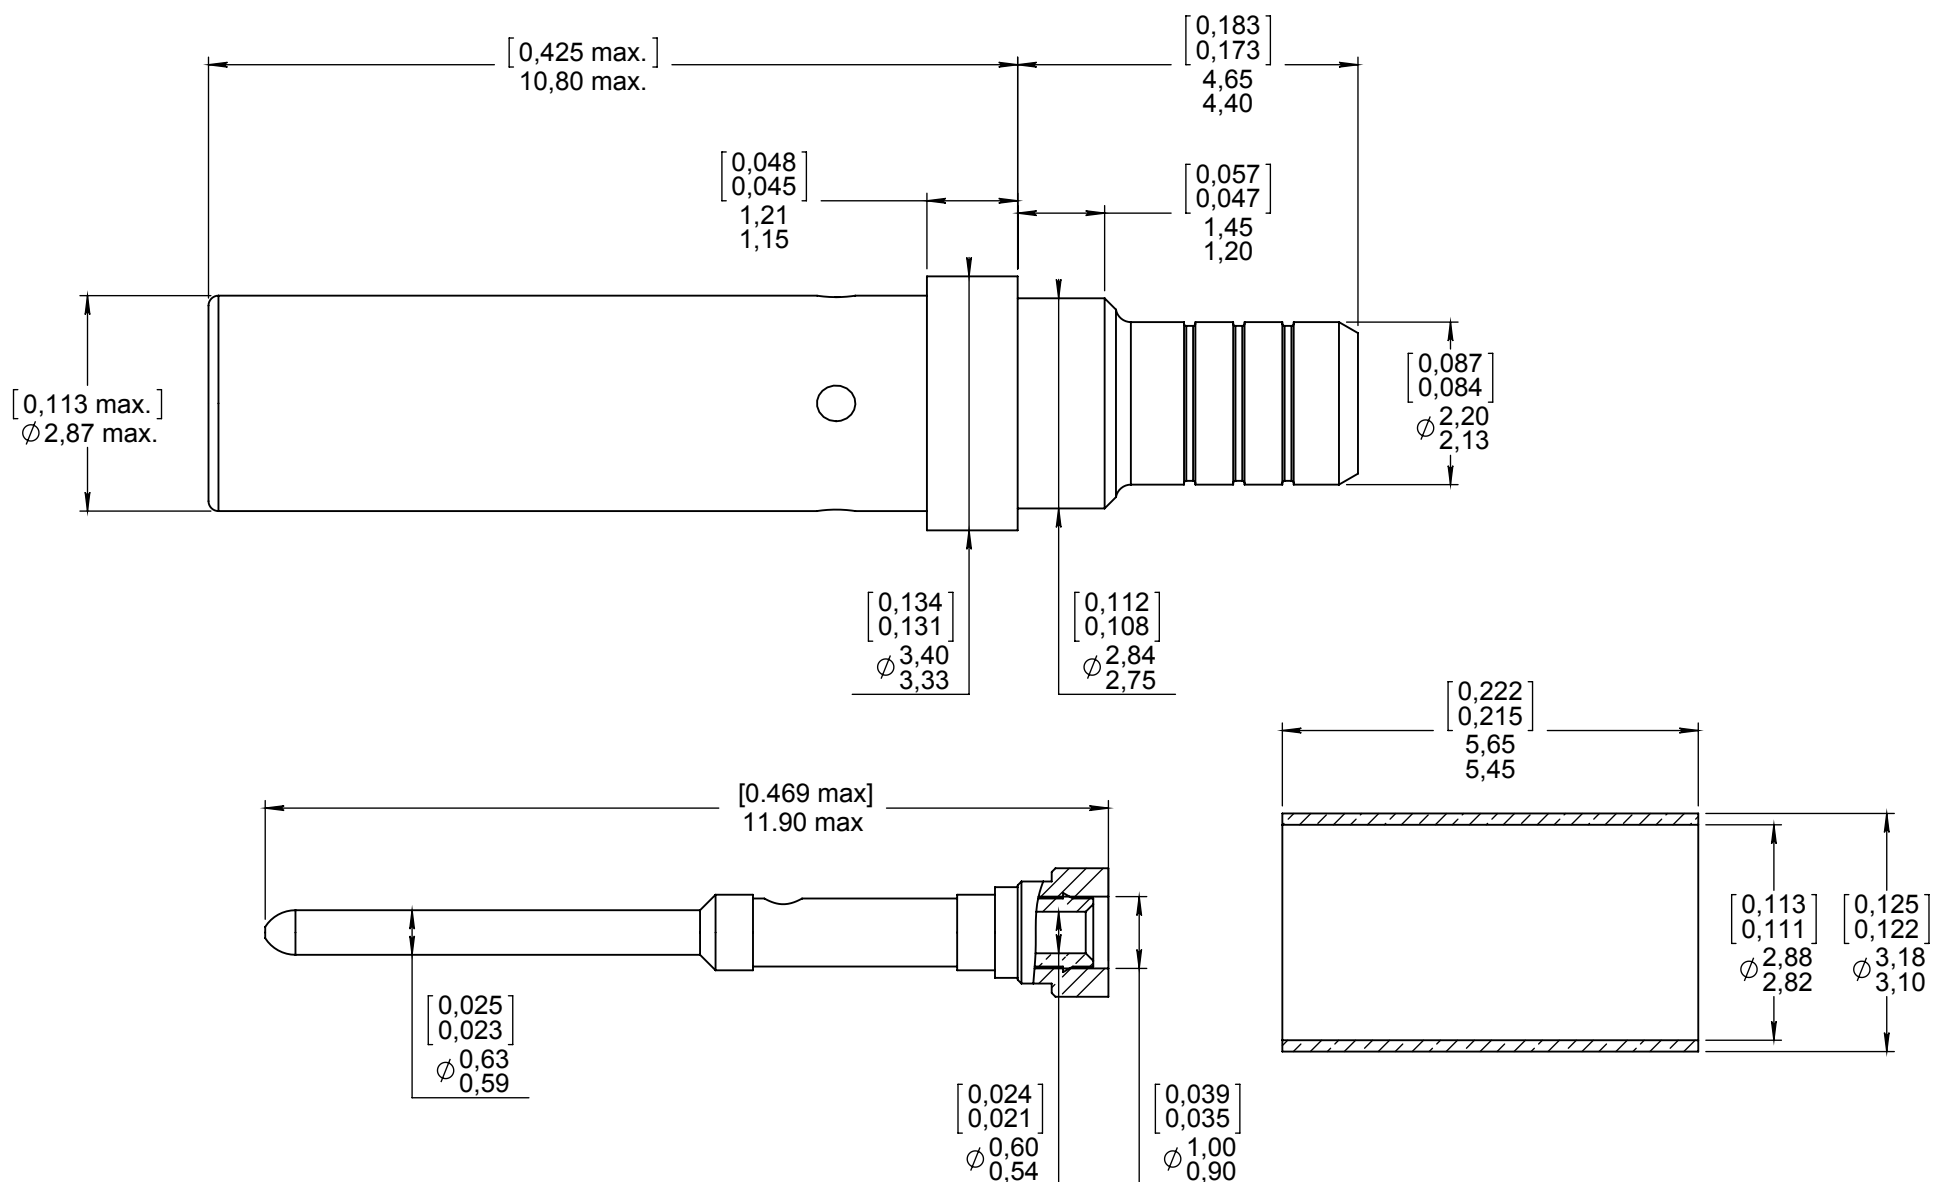



Series
EPXSIZE 15 SOCKET COAX CONTACT FOR
RG316 CABLE, FILECA F1709/8 CABLE AND FILECA F1709/6 CABLE, RG188 AND RG179 CABLEIssue:
July. 23, 2014Page
1/1**MATERIALS & FINISHES :**

Outer, center contacts & ferrule : Copper alloy ; Gold over Nickel plated.
Sleeve : stainless steel ; passivated.
Insulators : PTFE

WIRING INSTRUCTION : See RP4185**CHARACTERISTIQUE IMPEDANCE :**

- Contact : 23 Ω
- RG316 cable, FILECA F1709/6 cable, RG188 cable : 50 Ω
- FILECA F1709/8 cable, RG179 cable : 75 Ω

DIMENSIONS : mm (inch are given for information only)

Estimated weight : 0.47 g

CREATION

PEN:

July 23th, 14KX22 cable replaced by RG316 cable
KX22 is only for french standards and
cable impedances added

Moutault

Vieira

NOM: L. FALETTI

Jan 20, 14

Title updated : contact impedance added

Pailot N.

Legloahec Y

DATE: Sept 4, 87

Aug 25, 08

Add RG179 CABLE

Pailot N.

Legloahec Y

APPR.:

Dec 7, 07

Add RG188 CABLE

Surault

Pessard M.

Issue

Revisions

Name

Approved

617030EN

RADIAL PROPRIETARY INFORMATION