



Series

STRAIGHT STRAIN RELIEF
ONLY FOR QUADRAX PLUG CONNECTOR



Issue:
Nov. 30, 2017

Page
1/1

4-40UNC captive screws
5/64 Hex socket head

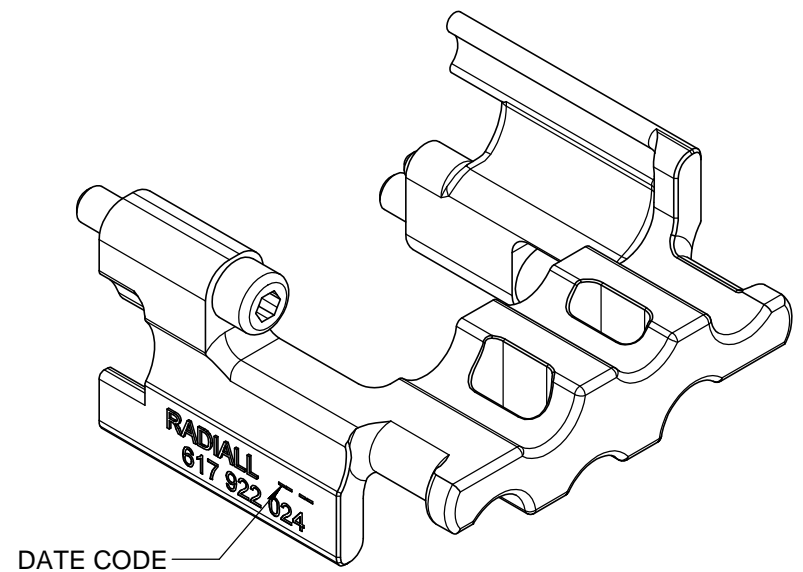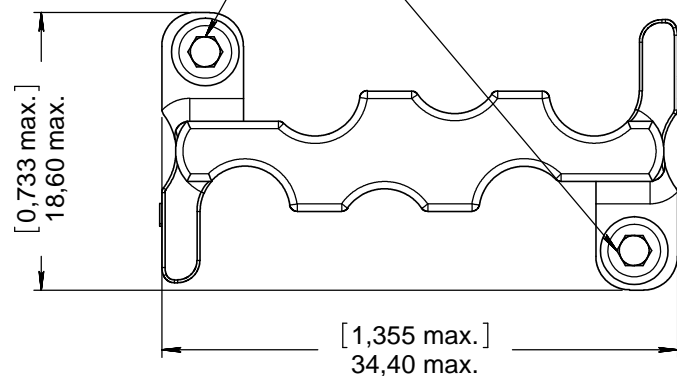

DATE CODE

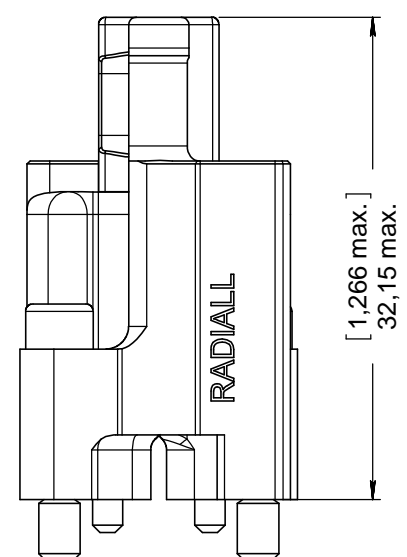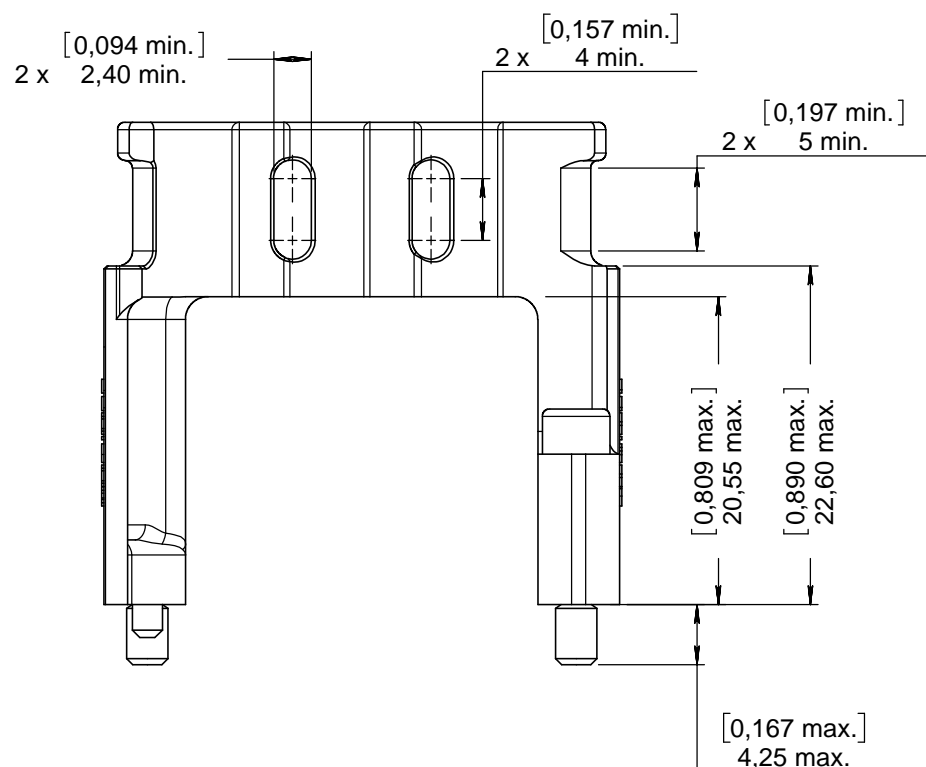

MATERIALS & FINISHES:


- BACKSHELL : High Grade Thermoplastic,
- SCREWS : Stainless steel

NOTE :

- 4-40 UNC CAPTIVE SCREW LOCKING TORQUE : $0,55 \pm 0,05$ Nm
- The Strain Relief has to be mounted per MIBS 17 0004
- Mounting tool : 5/64 Allen Wrench ; P/N : 282 666 002

WEIGHT: 6.5 grams

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 6.50 g

CREATION

Nov. 30,17

TDS updated

Moutault W.

Pailot N.

PEN: 2009-03-2798

Apr 28, 11

Dimension added : 2 x 4 [1,157]min & Mounting tool P/N added.
Dimension updated 2x 5.70 [1,224] min becomes 2 x 5 [1,197]min

Pailot N

Legloahec Y

Nov 18, 10

"Not Qualified" removed

Pailot N.

Legloahec Y

NOM: PAILOT N.

DATE: Sept 28, 2009

Sept 28, 09

Design updated : Crossbar widened & marking
added each side of strain relief; weight updated
Material modified : was aluminium dimensions
updated

Pailot N.

Pessard M

APPR.: PESSARD M.

Issue

Revisions

Name

Approved

617922024EN

RADIAL PROPRIETARY INFORMATION