


Series
EPXB

SIZE 1 RACK AND PANEL EPXB
EMI BACKSHELL

Issue:
Jul. 25, 2019

Page
1/1

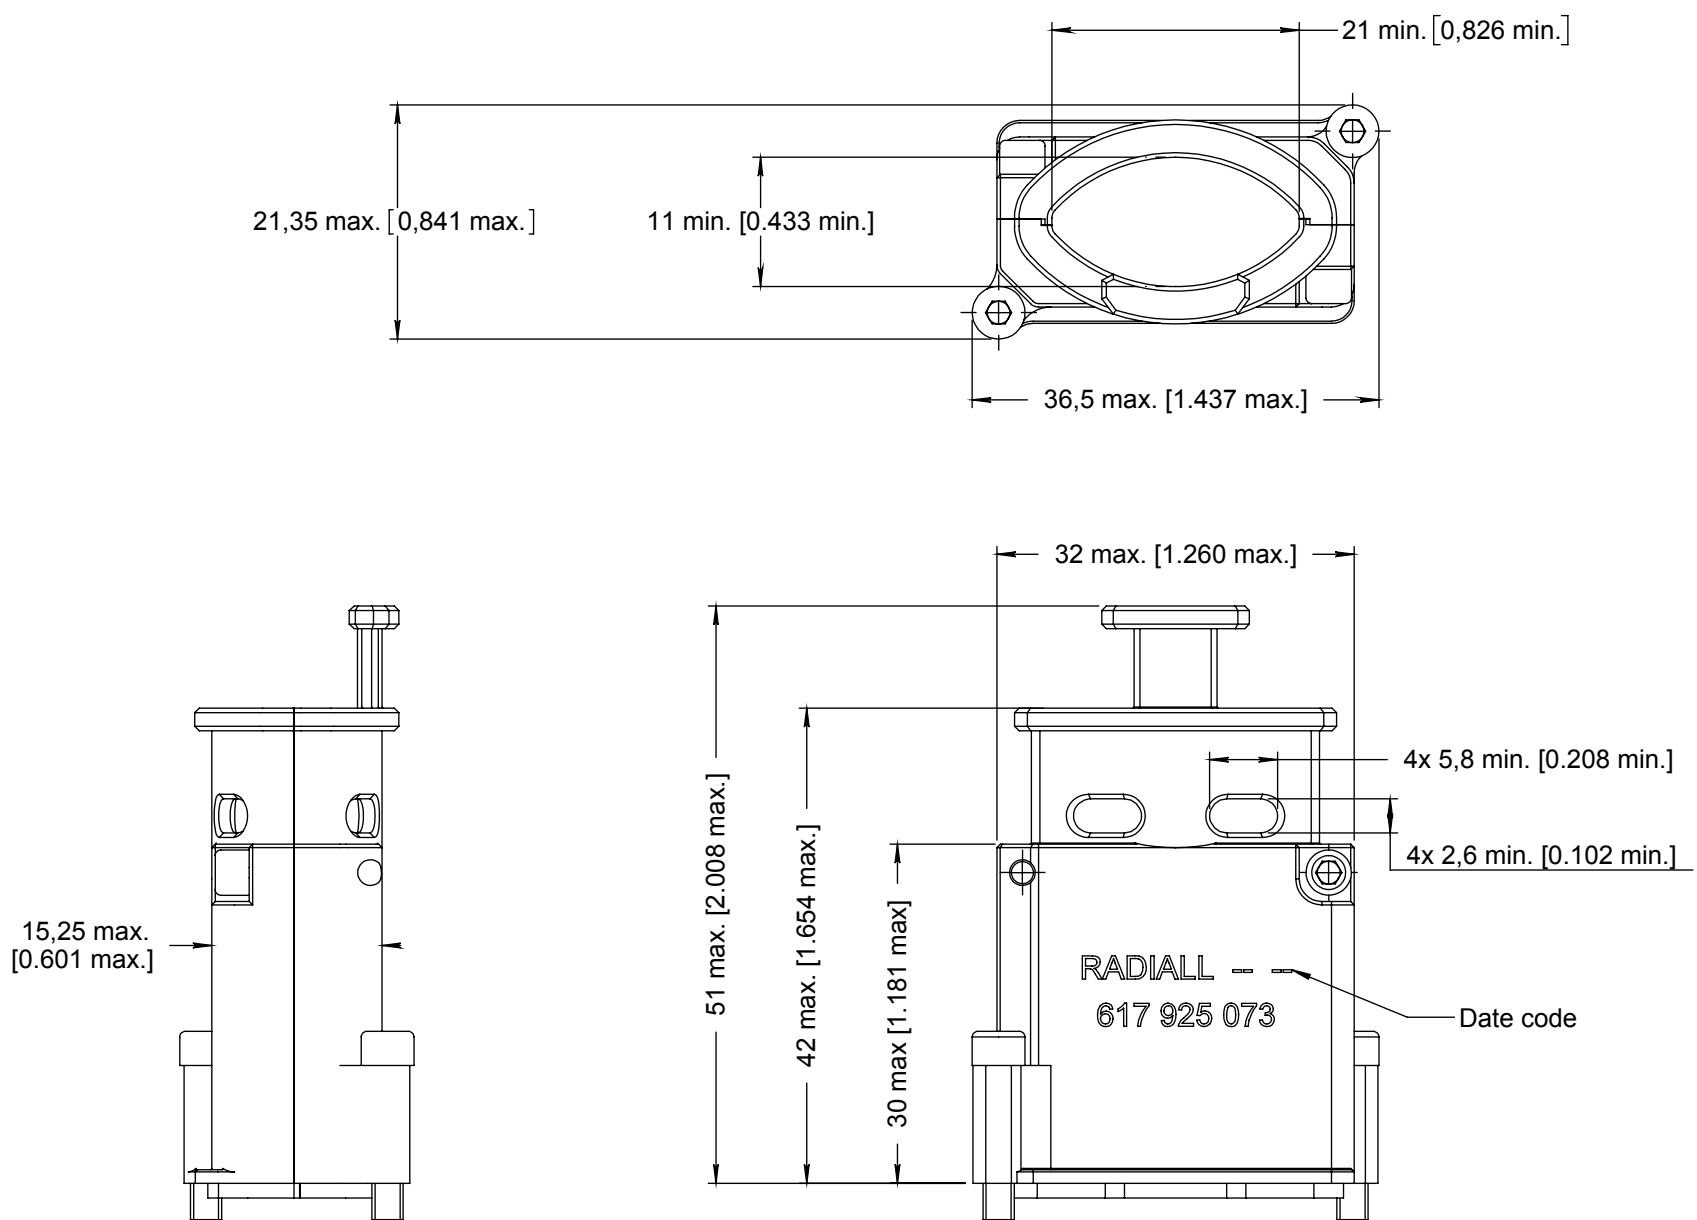


MATERIALS & FINISHES:


- BACKSHELL: Aluminum alloy 6061-T651; Nickel plated,
- SCREWS: Stainless steel.

4-40 UNC captive screw locking torque : 0,55 ±0,05 Nm (4,90 Inchpound)

DIMENSIONS : mm (inch are given for information only)



2x 4-40 UNC captive screws
To install both backshells together.
(Hex 5/64 Socket head)

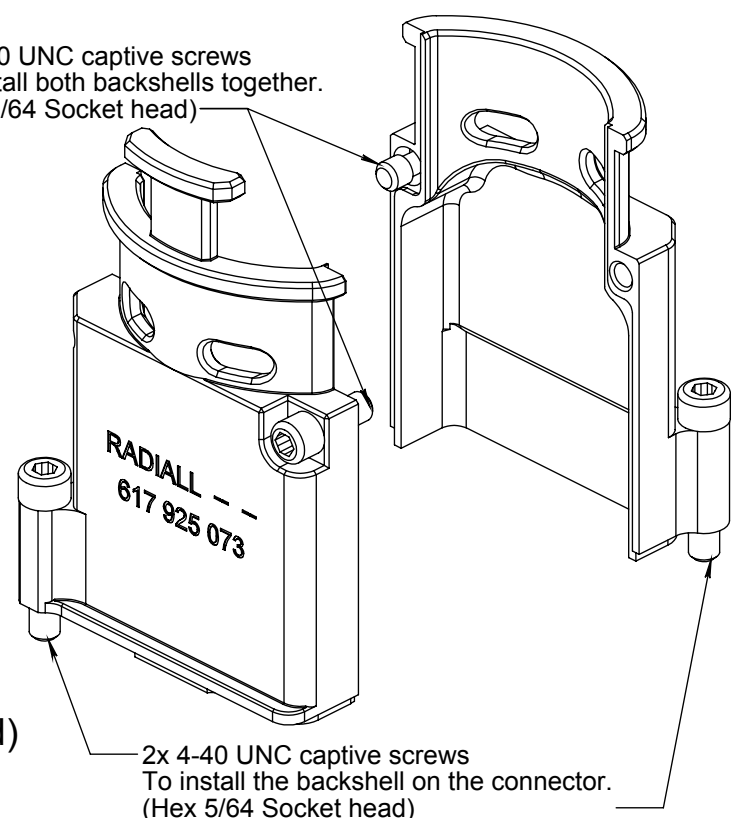

Estimated weight : 20 g

CREATION

PEN: 2008-11-2113

NOM: MALTY S.

DATE: Apr. 09, 2009

APPR.1E GLOAHEC Y.

Issue	Revisions	Name	Approved
Jul. 25, 19	Correction on dimension 21,35max : was 21,20max	Lopez C.	Weihs H.
May 06, 13	Screw locking torque modified	Ceberio	LeGloahec
Aug 12, 09	2x 5,80 min --> 4x 5,80 min ; 2x 2,60 min --> 4x 2,60 min	Malty	LeGloahec
June 08, 09	Design and dimensions updated	LeGloahec	Pessard

617925073EN

RADIALL PROPRIETARY INFORMATION