


Series
MPX

NON-ENVIRONMENTAL SIZE 8 CRIMP SOCKET COAX CONTACT 75Ω
FOR HABIA 402FJ-75 CABLE

Issue:
Jan. 24, 2022

Page
1/1

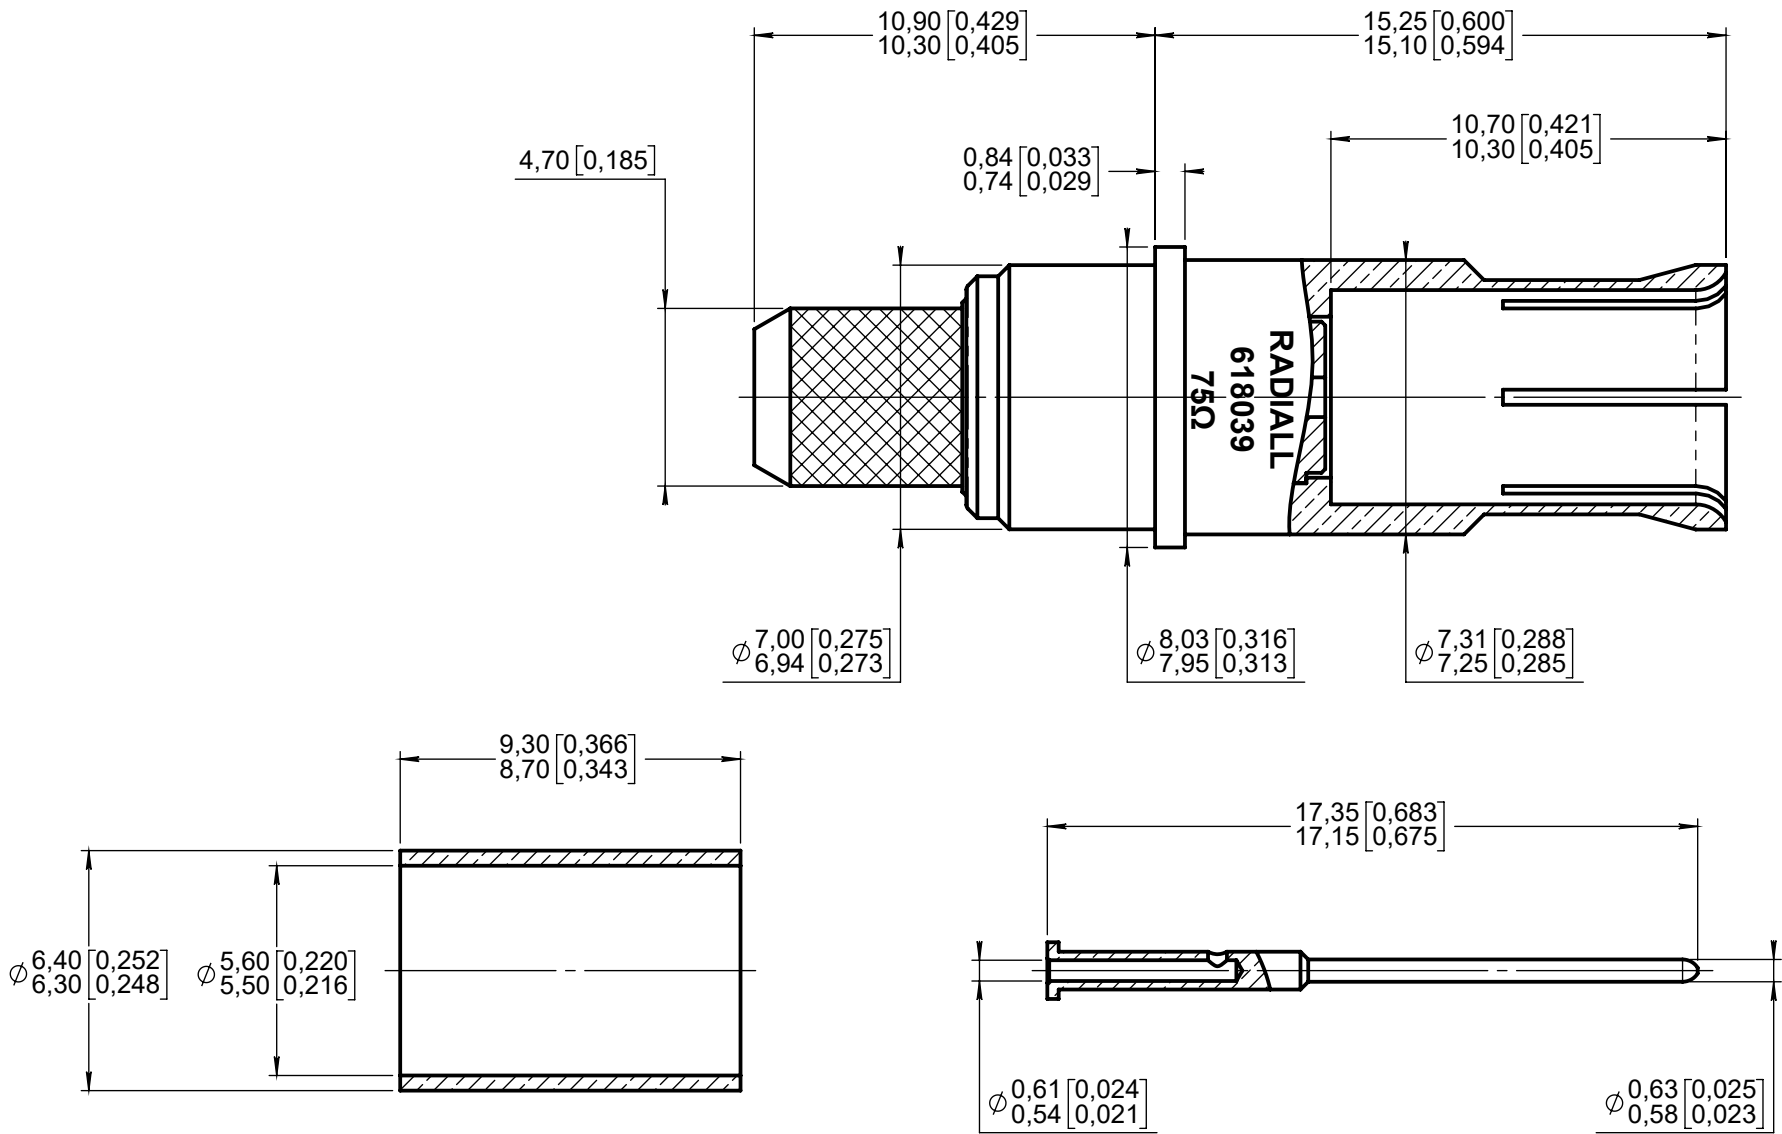

MATERIAL:

- OUTER CONTACT : BERYLLIUM COPPER PER ASTM B 196
- CENTER CONTACT : BERYLLIUM COPPER PER ASTM B 196
- FERRULE : BRASS PER ASTM B 16 OR ASTM B 453 OR EN 12164
- DIELECTRIC : PTFE PER ASTM-D-1710 OR EQUIVALENT

FINISHES:

- FERRULE, OUTER AND CENTER CONTACTS : PLATING .00005 INCH OF GOLD PER SAE AMS-2422 OVER NICKEL PER AMS 2403

TOOLING:


- CENTER CONTACT : CRIMPING TOOL M22520/2-01 (RADIALL 282281)
SELECTOR ON 5
POSITIONNER 282587 (DANIELS K1025-S)
- FERRULE : CRIMPING TOOL M22520/5-01 (RADIALL 282293)
DIE M22520/5-05 (RADIALL 282246)
HEX A 5,40 (.213) ON FLATS

EXTRACTION TOOL:

- M81969/28-03 RADIALL 282549001

WIRING INSTRUCTIONS: SEE MICT0100052

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 3,70 g

CREATION

PEN: M010106260C

NOM: MACARI JP.

DATE: Feb. 22, 2002

APPR.: /

Jan. 24, 22

Wiring instructions RP56086 >> MICT0100052

Branjonneau V.

Legendre T.

Issue

Revisions

Name

Approved