


Series
NSX


SIZE 8 SOCKET TWINAX CONTACT
ABS1111S0103 FOR ASNE0807WX26 CABLE

Issue:
Dec. 14, 2010

Page
1/1

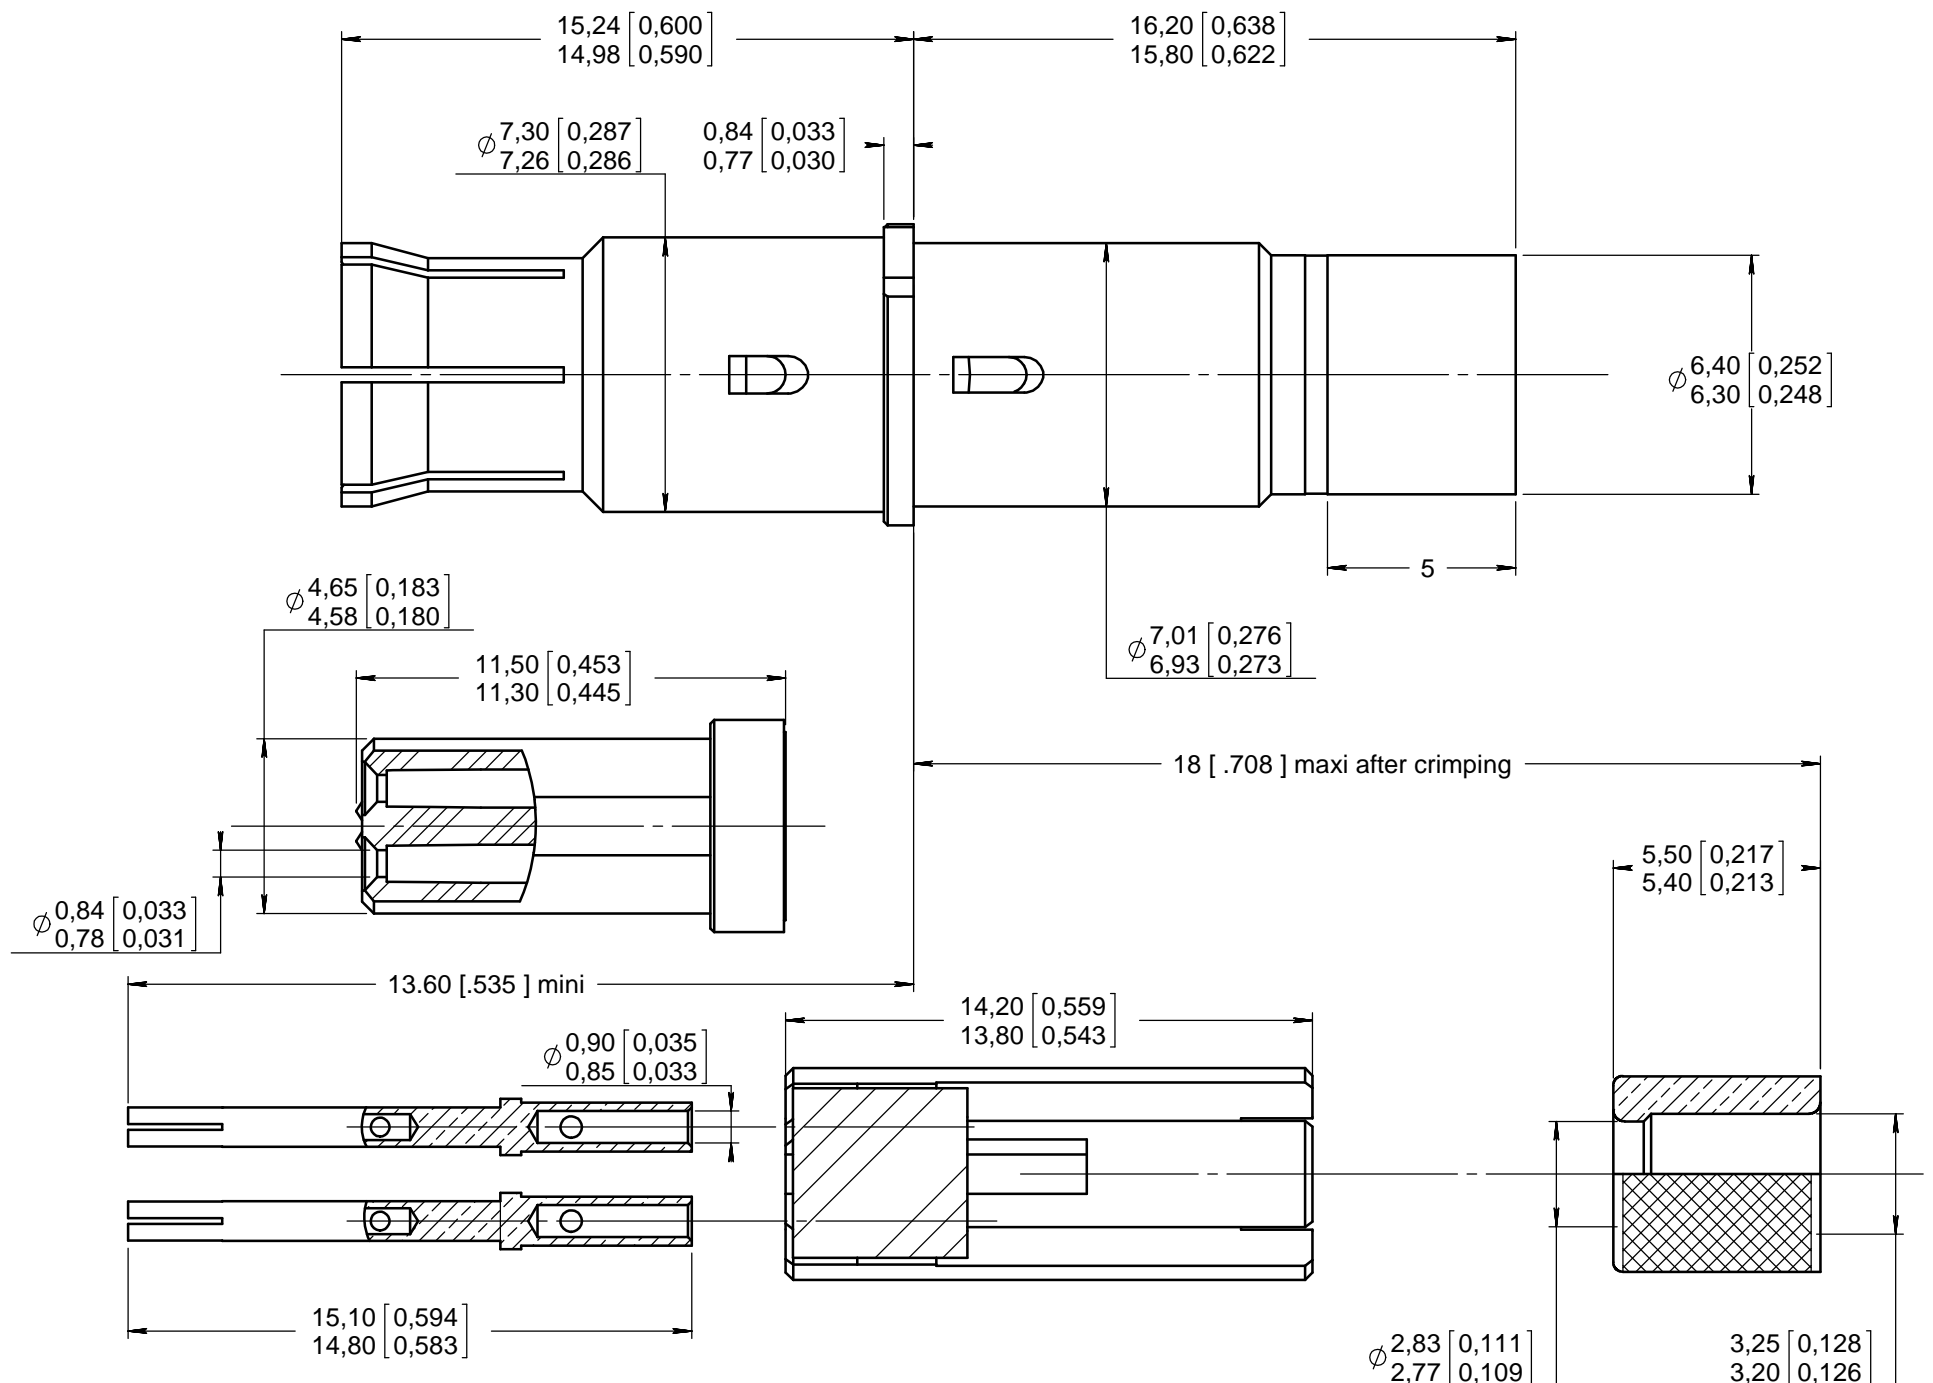

ENGAGING FACE

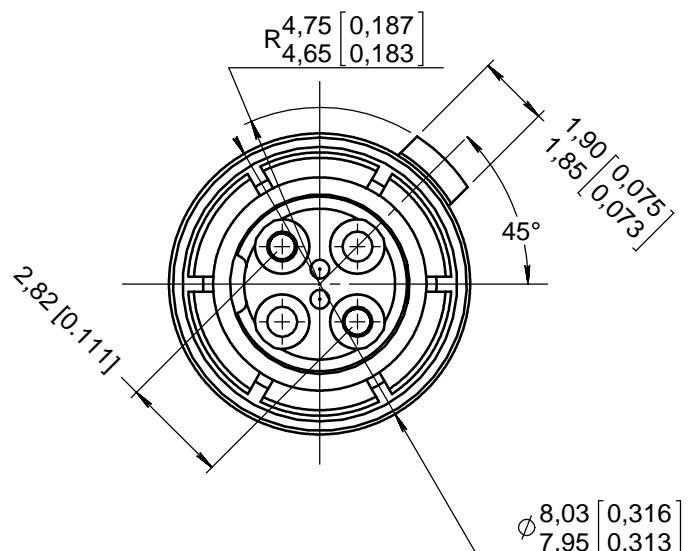

MATERIALS AND FINISHES


- OUTER BODY AND CENTER CONTACTS: BERYLLIUM COPPER ALLOY PER ASTM B 196
- FERRULE : BRASS PER ASTM B 455
- INSULATOR : PFA PER ASTM-D-3307-00
- SPACER : PEI ULTEM PER ASTM-D-5205
- SEALING PLUGS : PTFE

ALL METALLIC PARTS : GOLD PLATE PER SAE AMS 2422 , 50 MICROINCHES MINIMUM
OVER A NICKEL PLATE PER SAE AMS-QQ-N-290, CLASS 2
100 MICROINCHES MINIMUM

EXTRACTION TOOL : M 81969/28-03 OR M81969/14-06 (RADIAL 282 549 001)

WIRING INSTRUCTIONS : SEE RP56870

DIMENSIONS : mm (inch are given for information only)



CREATION				
PEN: M050004032A				
NOM: MALTY S.				
DATE: March.22 , 2007				
APPR.:	Dec. 14, 10	Front insulator changed, sealing plugs added ASNE0807WX26 cable added in designation	LALLOZ	BROCHET
	Issue	Revisions	Name	Approved

620065012EN

RADIAL PROPRIETARY INFORMATION

Confidential information not to be disclosed to third parties without Radial approval
This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311