


Series
NSX

NONENVIRONMENTAL SIZE 5 COAXIAL SOCKET CONTACT
PER AIRBUS SPECIFICATION ASNE0173
FOR WZ CABLE (EN4604-003)

Issue:
NOV. 25, 2013

Page
1/1

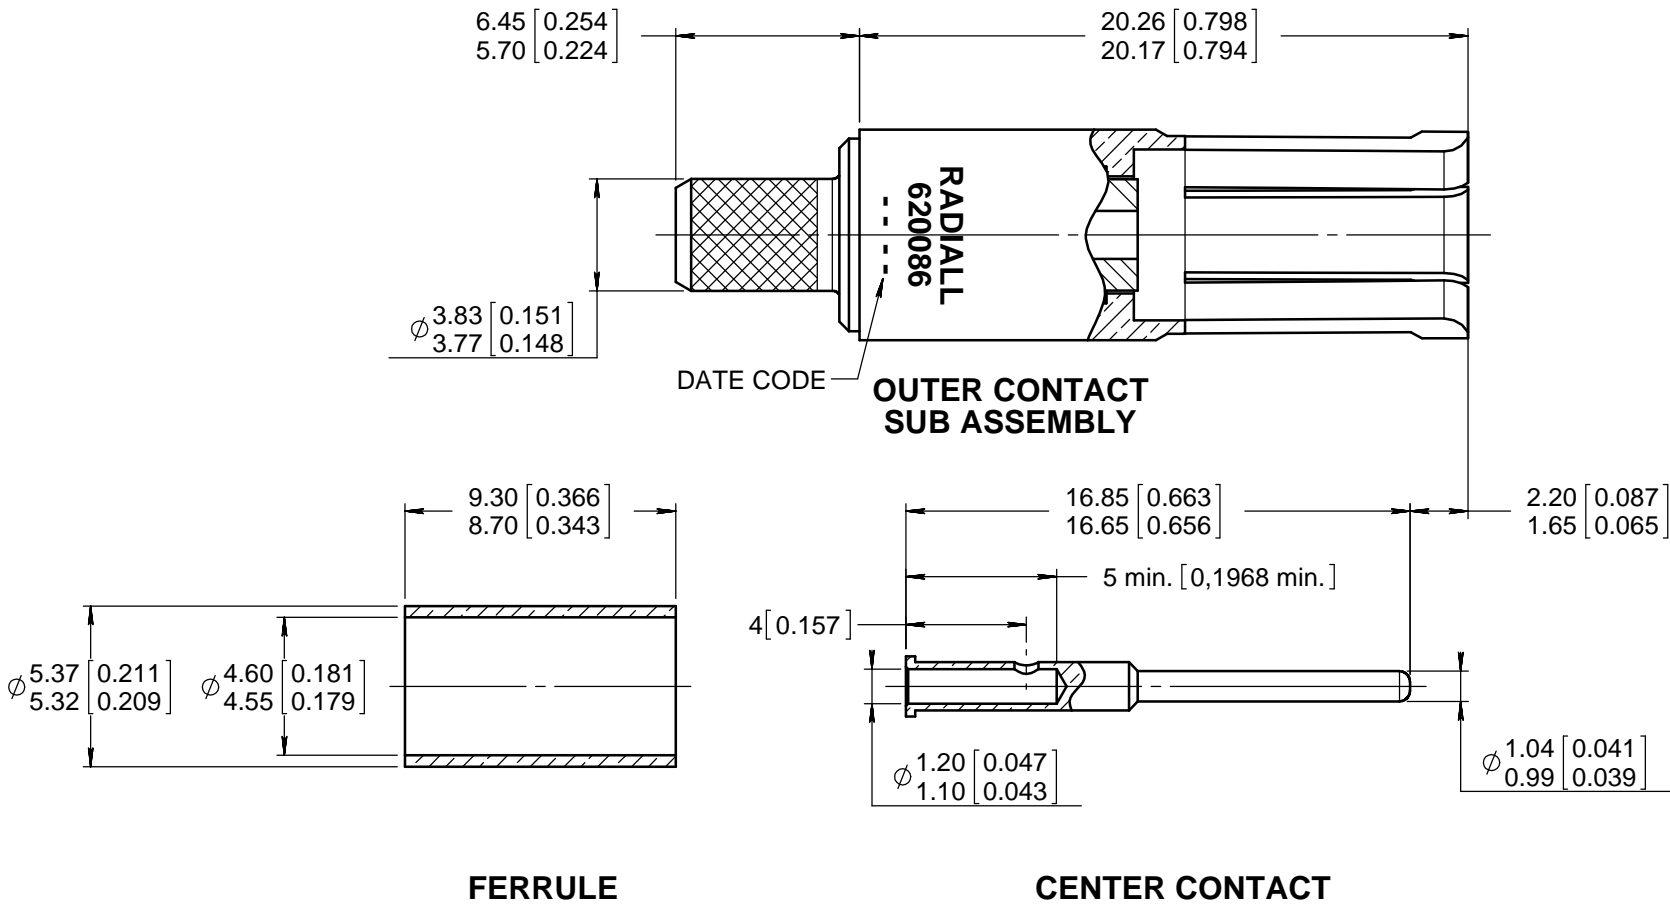

MATERIAL :
- OUTER CONTACT : BERYLLIUM COPPER PER ASTM B 196
- INSULATOR : PTFE PER ASTM D 1710 OR EQUIVALENT
- CENTER CONTACT : BRASS PER ASTM B 16 OR ASTM B 453 OR EN 12164
- FERRULE : BRASS PER ASTM B 16 OR ASTM B 453 OR EN 12164


FINISH :
- ALL METAL PARTS : PLATING .00005 INCH OF GOLD PER SAE AMS-2422 OVER NICKEL PER AMS 2403

WIRING INSTRUCTION : SEE MICT0100014

INS/EXT TOOL : 282946 (M81969/28.01)

ELECTRICAL CHARACTERISTICS :
- IMPEDANCE : 50 Ohms nominal
- VSWR :
= 1,1 (0 MHz TO 300 MHz)
= 1,3 (300 MHz TO 500 MHz)
- DIELECTRIC WITHSTANDING VOLTAGE : 750 VRMS AT SEA LEVEL

DIMENSIONS : mm (inch are given for information only)



CREATION PEN: 2009-11-4458 NOM: LEGENDRE T. DATE: Dec. 09, 2009 APPR.: BROCHET L.	NOV. 25, 13	MODIFICATION: 20.30/20.15 => 20.26/20.17	ZUNIGA	Dupuis V.
	Nov. 03, 11	Added date code marking on contact	Legendre T.	Dupuis V.
	Sept. 20, 11	Updated crimp barrel dimension	Legendre T.	Pessard M.
	Sept. 02, 11	Insertion/extraction tool P/N added	Branjonneau	Pessard M.
	July 27, 11	Updated dimension of ferrule and deleted Preliminary and to be qualified	DUPUIS	PESSARD
	Jan. 31, 11	4,90 min [0,193 min] => 5 min [0,1968 min]	Lalloz A.	Brochet L.
	Issue	Revisions	Name	Approved