


Series
NSX

SIZE 1 CRIMP SOCKET COAX CONTACT
FOR ASNE0691 AND GSC-03-81748-00 COAX CABLES

Issue:
Mar. 13, 2017

Page
1/1

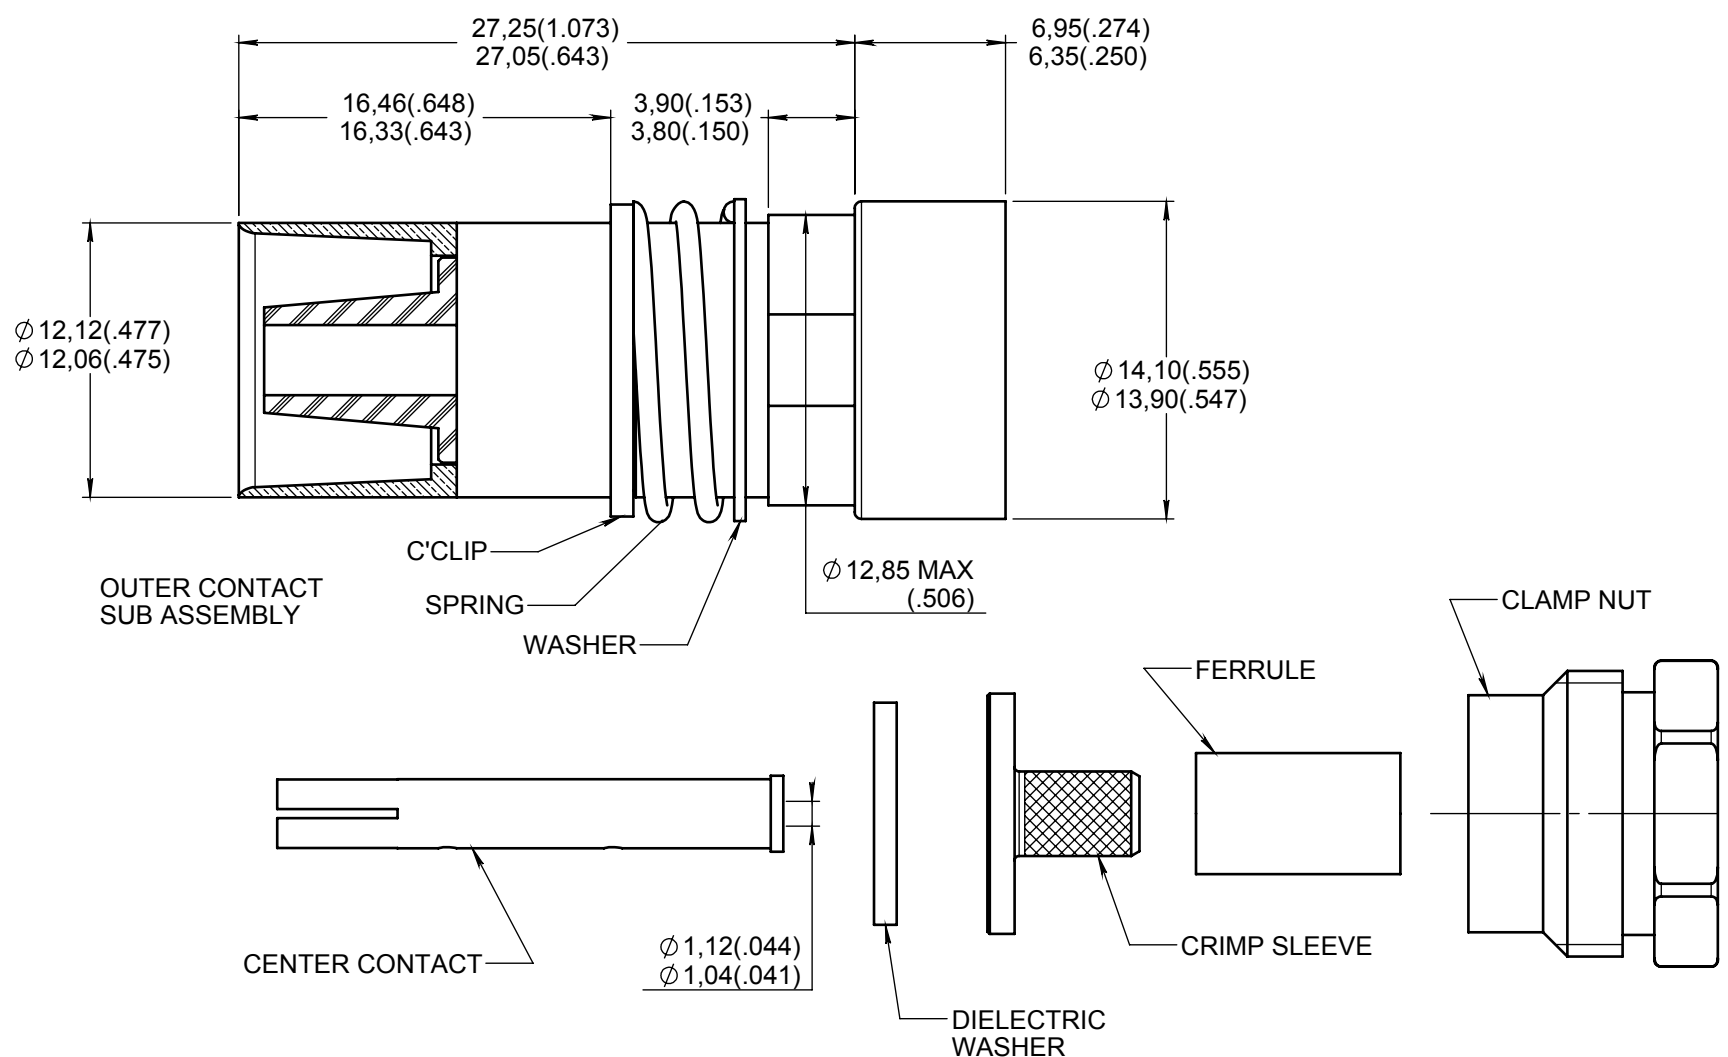

MATERIAL :


- OUTER CONTACT AND CENTER CONTACT BODY : BERYLLIUM COPPER PER ASTM-B-196
- DIELECTRIC AND DIELECTRIC WASHER : PTFE PER ASTM D 1710 OR EQUIVALENT
- CRIMP SLEEVE, FERRULE AND CLAMP NUT : BRASS PER ASTM B 16 OR ASTM B 453 OR EN 12164
- SPRING, C'CLIP AND WASHER : STAINLESS STEEL PER SAE AMS 5688

FINISH :

- OUTER CONTACT BODY, CRIMP SLEEVE, CENTER CONTACT BODY, CLAMP NUT AND FERRULE : PLATING .00005 INCH OF GOLD PER MIL-DTL-45204 OVER NICKEL PER AMS 2403
- WASHER : PASSIVATED
- C'CLIP : NICKEL PROTECTED

WIRING INSTRUCTIONS: SEE MICT0100000

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 20 g

CREATION

PEN: 2008-06-1131

NOM: MACARI JP.

DATE: June 24, 2008

APPR.: LEGENDRE T.

Issue	Revisions	Name	Approved
Mar. 13, 17	Updated flat dimension per ARINC 600	Pécault B.	Legendre T.
Feb. 17, 16	Wiring instruction number correction	Ramos D.	Zuniga F.
May 05, 10	Added gore GSC-03-81748-00 cable	Mondot JC.	Brochet L.

620146001EN

RADIAL PROPRIETARY INFORMATION